

PROFESSIONAL TOOLS SUPPLIER

www.changlutools.com

Changlu[®] TOOLS



PRODUCT CATALOG
2024.02

Changlu TOOLS

SHANDONG CHANGLU TOOLS CO., LTD. IS AN INDUSTRIAL AND TRADE ENTERPRISE WHICH INTEGRATES HARDWARE TOOLS, AUTOMOBILE MAINTENANCE TOOLS, MACHINE REPAIR TOOLS AND HOUSEHOLD TOOLS DEVELOPMENT, PRODUCTION AND SALES. IT IS LOCATED IN LINYI, SHANDONG PROVINCE, THE CAPITAL OF LOGISTICS IN CHINA. THE COMPANY COVERS AN AREA OF 50,000 SQUARE METERS, WITH A PRODUCTION AND STORAGE AREA OF 25,000 SQUARE METERS. IT MAINLY DEALS IN 16 CATEGORIES AND MORE THAN 5,000 SPECIFICATIONS SUCH AS CHANGLU BRAND SETS OF TOOLS, SLEEVES, SLEEVE ACCESSORIES, WRENCHES, SCREWDRIVERS, FASTENING, SHEARING, CLAMPS, KNOCKING, RENOVATION, WELDING, ELECTRONICS, MEASUREMENT, AUTOMOBILE REPAIR TOOLS, ETC. IT IS WIDELY USED IN MACHINERY, PETROLEUM, CHEMICAL, ELECTRIC POWER, AUTOMOBILE MANUFACTURING AND MAINTENANCE, ETC. INDUSTRY. THE COMPANY IS CURRENTLY THE DIRECTOR OF CHINA WUJIAOCHUA BUSINESS ASSOCIATION, THE EXECUTIVE DIRECTOR OF THE NATIONAL FEDERATION OF INDUSTRY AND COMMERCE HARDWARE AND ELECTRICAL CHAMBER OF COMMERCE AND THE DIRECTOR UNIT OF SHANDONG HARDWARE AND ELECTRICAL CHAMBER OF COMMERCE.

THROUGH THE CERTIFICATION OF ISO 9001 INTERNATIONAL QUALITY MANAGEMENT SYSTEM, THE COMPANY HAS WON THE HONORARY TITLES OF TEN NATIONAL ENTERPRISES IN CHINA'S AUTOMOBILE MAINTENANCE INDUSTRY, HONEST MANUFACTURER OF HARDWARE CHAMBER OF COMMERCE AND INDUSTRY, BRAND CONSTRUCTION DEMONSTRATION ENTERPRISE OF HARDWARE AND ELECTROMECHANICAL INDUSTRY IN SHANDONG PROVINCE, SPECIALTY AND INNOVATION ENTERPRISE OF SHANDONG PROVINCE, CONTRACT-ABIDING AND CREDIT-ABIDING ENTERPRISE OF SHANDONG PROVINCE, ETC. CCTV HONORARY BROADCASTING BRAND WAS AWARDED THE TITLE OF "TOP TEN PRODUCTS OF MAINTENANCE TOOLS" BY SHANGHAI AUTOMOBILE INSURANCE CHAMBER OF COMMERCE AND WAS AWARDED THE HONORARY TITLE OF "HONEST MANUFACTURER" BY THE NATIONAL FEDERATION OF INDUSTRY AND COMMERCE HARDWARE MACHINERY CHAMBER OF COMMERCE. LONG DEER INSULATION TOOLS HAVE PASSED GERMAN VDE CERTIFICATION.

THE COMPANY ADHERES TO THE BUSINESS PURPOSE OF "SCIENTIFIC MANAGEMENT, HIGH QUALITY AND EFFICIENCY, HONESTY AND INTEGRITY, INNOVATION AND DEVELOPMENT", OCCUPIES THE MARKET WITH QUALITY, WINS CUSTOMERS WITH SERVICE, AND ACHIEVES THE BRAND OF CHANGLU TOOLS. THE COMPANY IS WILLING TO COOPERATE WITH CUSTOMERS AT HOME AND ABROAD, AND COMMIT ITSELF TO THE DEVELOPMENT AND BRILLIANCE OF CHANGLU TOOLS.



Changlu | DOMESTIC AGENCY FORUM



The first core Dealer Growth Forum



The second core Dealer Growth Forum



The third core Dealer Growth Forum



The fourth core Dealer Growth Forum



The fifth core Dealer Growth Forum



The sixth core Dealer Growth Forum



The Eighth Core Dealer Growth Forum

Changlu | ICON CONTROL TABLE

 1/4" square	 Rotating triangle	 60# carbon steel
 3/8" square	 Gear Type	 HSS high-speed steel
 1/2" square	 E Type	 6150Cr-v(6150Chrome-vanadium steel)
 3/4" square	 VDE insulation	 Double the standard torque
 1" square	 Double insulation protection	 Cutting sharp
 PHILLIPS	 3C Certification	 Environmental protection and recycling
 Torx	 Cr-Mo(Chrome-molybdenum steel)	 knockable
 Slotted	 S2 alloy steel	 Strong clamping
 6PT	 Cr-v(Chrome-vanadium steel)	 Chinese national standard
 12PT	 SK5 carbon tool steel	 United States national standard
 Star type	 45# carbon steel	 Germany national standard
 Star type(hollow)	 3Cr13 stainless steel	 Japanese industrial standard
 Square	 8620 carburizing steel	 German safety standard
 Plum blossom (hollow)	 65 manganese steel	
 Rotating quadrangle	 40Cr-Mo(40 Chrome-molybdenum steel)	

Changlu | PRODUCTS CATALOG

A	Tools Set	005~018
Auto repair tool set · Socket tool set · Heavy duty socket set · Household tool set		
B	Socket And Socket Accessories	019~052
1/4 "Dr. socket · 1/2"Dr. socket · 3/8 "Dr. socket · 3/4"Dr. socket · 1 "Dr. socket · Extension bar · Sliding bar · bent bar · F bar · adding force bar · Ratchet wrench · Adapter		
C	Wrenches	053~069
Adjustable wrench · Combination ratchet wrench · Ring wrench · Combination wrench · double open end wrench · Hex key wrench · T type wrench		
D	Screwdriver Fastening	070~088
Industrial oil resistant screwdriver · Two-color Core Screwdriver · Two-color screwdriver · Star batch socket · power socket · Impact screw batch		
E	Plier And Gripper	089~106
Plier tools · Labor saving Plier · German Plier · European Plier · American Plier · Looking Plier · water pump Plier · Carp Plier · retainer ring Plier · Pipe wrench		
F	Cutting Tools	107~122
Aviation scissors · Iron shears · PVC pipe cutter · Pipe Cutter · Garden scissors · Saw frame · Saw blade · Cutting wheel		
G	Knock Trimming Tools	123~132
Claw hammer · Round head Hammer · octagonal hammer · Stone hammer · Installation hammer · Assorted file · Steel file · drift pin · Punching chisel		
H	Measuring Tools	133~140
Tape measure, straight rul, Angle ruler, stick ruler, feeler ruler, level ruler, ranging wheel, laser level		
I	Decoration Tools	141~153
Riveting gun · Glue gun · Keel pliers · Suction cup · Glass cutter · Belt punch · Paint spray gun · Oil pump · tap and die set		
J	Electronic Tools	154~167
Wire stripper · Cold press pliers · Electric soldering iron · Solder wire · Solder strip · tin absorber · Heat gun · test pencil · LED work light · Multimeter		
K	Welding And Cutting Tools	168~174
Pressure reducer · Electric welding pliers · Welding torch · Welding nozzle · Oxygen tube · acetylene tube · air gun tube · Hot melt glue gun		
L	Auto Protection Tools	175~204
test pencil · grease gun · grease squirt · Lamar · Oil pot · Working lamp · Suction rod · Filter wrench · Jack · Tire repair Tool · inflator		
M	Power Tools	205~214
Hand electric drill · Lithium electric drill · Stone cutting machine · strong electric hammer pick · Lift · Threading machine · electric circular saw · aluminum sawing machine · Air compressor		
N	Tool Box Tool Car Tool Bag	215~229
Tool box, Tool car, Tool bag, Tool holder		
O	VDE Products	230~235
Wrench · T-square bar · Electrical combination pliers · Electrical bent-nose pliers · Electrical long nose pliers · Electrical diagonal cutting pliers · Flat nose pliers · Cable pliers · Screwdriver		
Q	Cutting Drilling Abrasive Abrasive Electric Consumables Series	236~250
Double head screwdriver head, Fried Dough Twists drill, diamond saw blade, cutting wheel, pointed chisel, flat chisel, electric hammer drill, hole opener tie		



TOOLS SET

123+1pcs Auto Repair Tool Set



Item NO.	Size	Volume	👤	📦	RMB
CL104201	123+1PCS	470x340x102	3PCS	10.30	

- 11PCS Mirror Finished Combination Spanners(6,8,10,11,12,13,14,16,17, 18,19mm)
- 2PCS 3/8"Dr, Spark plug Socket(16mm,21mm)
- 1PC 100mm T52
- 2PC Percussion Screwdriver(6")
- 1PC Bit Holder
- 20PCS Bit(4,5,PZ0,PZ1,PZ2,PZ3,PH0,PH1,PH2,PH3,T6,T8,T10,T15,T20,T25, T30,T35,T40)
- 3PCS Handle Ratchet Wrench(1/2",1/4",3/8")
- 1PC Extension Bar
- 9PCS Hex Key spanner
- 4PCS Extension Bar (1/2" Dr, 10",3/8" Dr, 5",1/4" Dr, 3")
- 1PC Electric Tester for car
- 1PC Flat 3 Jaws Oil Filter Wrench
- 7PCS 1/2" Mirror Finished 6PT Socket(20,21,22,24,27,30,32mm)
- 11PCS 3/8" Dr, Mirror Finished 6 PT Socket(9,10,11,12,13,14,15,16,17,18, 19mm)
- 9PCS 1/4" Dr, Mirror Finished 6PT Socket(4,5,7,8,9,10,11,12,13)
- 8PCS 3/8" Dr, E Type (8,10,11,12,14,16,18,20mm)
- 4PCS deep Mirror Finished 6PT Socket(13,14,15,17mm)
- 4PCS 1/4" Dr, Deep Mirror Finished Socket(8,9,10,12mm)
- 3PCS Universal Joint(1/2" Dr,,3/8" Dr,,1/4" Dr,)
- 17PCS 1/4",1/2",3/8" Bit (T60,T50,T45,T40,T55,T20,T30,HW5,HW6,HW3,HW4, PZ1,PZ2PH1,PH2,PD5,5,PD6,5)
- 1PCS Shock absorbed Socket
- 1PCS Special Hex Spanner For Audi
- 1PC Special Bi-hex Spanner For Audi
- 1PC Plastic Box

150pcs Auto Repairing Tool Set




Item NO.	Size	Volume	👤	📦	RMB
CL104301	150PCS	505x330x103	2PCS	11.92	

- 17PCS 1/2" Dr, 12PT Socket (10,11,12,13,14,15,16,17,18,19,20,21,22, 24,27,30,32mm)
- 6PCS 1/2" Dr, Deep Socket(10,12,13,14,17,19mm)
- 4PCS 1/2" Dr, deep Socket(17,19,21,24mm)
- 1PC 1/2" Dr, Quick Release Ratchet Wrench
- 1PC 1/2" Dr, Universal Joint
- 2PCS 1/2" Dr, Extension Bar (5" 10")
- 1PC Connector
- 3PCS 1/2" Dr, E Type Socket (E20 E22 E24)
- 11PCS 3/8"Dr, 6PT Socket(9,10,11,12,13,14,15,16,17,18,19mm)
- 6PCS 3/8" Dr, 6PT Deep Socket (10,11,12,13,14,15mm)
- 1PC 3/8" Dr, Quick Release Ratchet Wrench
- 6PCS 3/8" Dr, E Type Socket (E10 E11 E12 E14 E16 E18)
- 1PC 3/8" Dr, Universal Joint
- 2PCS 3/8" Dr, Extension Bar (3",6")
- 2PCS 3/8" Dr, Spark plug Socket(16,21mm)
- 3PCS 3/8" Dr, 48mm (PH1,PH2,PH3)
- 5PCS 3/8" Dr, 48mm (T30 T40 T45 T50 T55)
- 6PCS 3/8" Dr, 48mm (H3,H4,H5,H6,H8,H10)
- 3PCS 3/8" Dr, 48mm(PZ1,PZ2,PZ3)
- 3PCS 3/8" Dr, 48mm (FD5,5,FD6,5,FD8)
- 13PCS 1/4" Dr, Sockets (4,4,5,5,5,5,6,7,8,9,10,11,12,13,14mm)
- 6PCS of 1/4" Dr, Deep Socket(4,5,6,7,8,9 mm)
- 5PCS of 1/4" Dr, E Type Socket (E4,E5,E6,E7,E8)
- 1PCS of 1/4" Dr, Handle Ratchet Wrench
- 1PCS 1/4" Dr, Universal Joint
- 2PCS 1/4" Dr, Extension Bar(2" 6")
- 1PC 1/4" Dr, Sliding Bar
- 1PC Bit Holder
- 1PC 1/4" Dr, Square Extension Bar
- 10PCS 1/4" Dr, Bits (T10,T15,T20,T25,T27,T30,T40,TS20,TS25,TS30)
- 3PCS Full Polished Ratchet Wrench (8x10mm,12x13mm,17x19mm)
- 9PCS Full Polished Hex Key Spanner (1,5,2,2,5,3,4,5,6,8,10mm)
- 12PCS Combination wrench (8,9,10,11,12,13,14,15,16,17,18,19mm)
- 1 Plastic Box



96pcs Mechanical Maintenance Tool Set



Item NO.	Size	Volume			RMB
CL106996	96PCS	470x340x100	3	6.38	

- 5 carbon steel mirror dual purpose wrenches 8, 10, 12, 13, 14mm
- 9-piece 9PCS matte spherical hex wrench (standard)
- 9-piece 6.3mm series mirror 6-angle PCS cylinder 4, 5, 6, 7, 8, 9, 10, 11, 12mm
- 9-piece 10mm series mirrored 6-angle PCS cylinder (Cr-V)
10. 11, 12, 13, 14, 15, 16, 17, 19mm
- 10 pieces of 10PCS 1/4X25L batch head set
(SL3, SL4, SL5, SL6, SL7, H2, H3, H4, H5, H6)
- 10 pieces of 10PCS 1/4X25L batch head set
(T8, T10, T15, T20, T25, T27, T30, T40, S0, S1)
- 10 pieces of 10PCS 1/4X25L batch head set
(PH1, PH2, PH3, PZ1, PZ2, PZ3, M4, M5, M6, M8)
- 10 pieces of 10PCS 1/4X25L batch head set T-shaped middle hole
(T10, T15, T20, T25, T27, T30, T40, S2, S3, AD)
- 6-piece T-series screwdriver slot (3X75, 5X100, 6X150)
Cross (3X75, 5X100, 6X150)
- 1 oil resistant dual-purpose screwdriver (Cr-V) 6 * 38
- 1 6.3mm series square joint rod (Cr-V)
- 1 6.3mm snap ring
- One 10mm series mirror quick release ratchet wrench
- 1 10mm series mirror extension rod (Cr-V) 3 "
- 1 variable joint (Cr-V) 10mm to 63mm
- One 10mm series spark plug PCS cylinder (Cr-V) 16mm
- 1 American style dual color steel wire pliers, 7 inches
- 1 water pump pliers, 10 inches
- One carbon steel open end wrench, 8 inches
- 1 T-series single piece art knife
- One 145MM ordinary measuring pen
- 1 fiber handle fitter's hammer 300g
- One G13 plastic shell tape measure 5mx19mm
- 1 flat file, 8 inches
- 1 American style two color pointed nose pliers, 6 inches
- 1 feeler gauge 100x10
- 1 piece of insulating tape

58pcs Auto Repairing Tool Set



Item NO.	Size	Volume			RMB
CL100358	58PCS	385x285x83	5	5.56	

- 18PCS 1/2" Dr. 6PT Socket (10,11,12,13,14,15,16,17,18,19,20,21, 22,23,24,27,30,32mm)
- 2PCS 1/2" Dr. Spark Plug Socket(16,21mm)
- 1PC 1/2" Dr. Universal Joint
- 2PCS 1/2" Dr. Extension Bar (5",10")
- 1PCS 1/2" Dr. Quick Release Ratchet Wrench
- 8PCS 1/2" Dr. 6PT Deep Socket(10,11,12,13,14,16,17,18,19)
- 25PCs 1/2" Dr. Bits (PD8,10,12),(PH1,2,3,4),(PZ1,2,3,4),(T20,25,30, 40,45,50,55),(HW4,5,6,8,10,12,14)
- 1PC 1/2" Dr. Screwdriver Bit Adopter

61pcs Auto Repairing Tool Set



Item NO.	Size	Volume			RMB
CL103961	61PCS	385x285x85	4	6.35	

- 18PCS 1/2" Dr.Mirror Finished 6PT Socket (10,11,12,13,14,15,16,17,18,19, 20,21,22, 23,24, 27,30,32mm)
- 13PCS 1/4" Dr. Mirror Finished 6PT Socket (4,5,6,7,8,9,10,11,12,13,14,4.5, 5.5mm)
- 12PCS Mirror Finished Combination Spanner(8,9,10,11,12,13,14,15,16,17, 18,19mm)
- 4PCS 1/2" Dr. Extension Bar (5",10"),1/4" Dr. (2",4")
- 2PCS 1/4",1/2" Dr. Quick Release Ratchet Wrench
- 2PCS 1/4",1/2" Dr. Universal Joint
- 1PC 1/2" Dr. Sliding Connector
- 2PCS 1/2" Dr. Spark Plug Socket(16,21mm)
- 1PC 1/4" Dr. Square Extension Bar
- 1PC 1/4" Dr. Flexible Extension Bar
- 1PC 3PCs Hex Spanners
- 1PC 1/4" Dr. Sliding Connector
- 1PC Plastic Box


37pcs Auto Repairing Tool Set



Item NO.	Size	Volume	📦	📏	RMB
CL105337	37PCS	387x286x83	5	5.52	

- 9PCS 1/2" Dr. Mirror Finished 6PT Socket (8,9,10,11,12,13,14,15,16, 17,18, 19,20,21,22,23,24,27,30,32mm)
- 12PCS Mirror Finished Combination Spanner(8,9,10,11,12,13,14,15, 16,17,18,19mm)
- 1PC 1/2" Dr. Quick Release Ratchet Wrench
- 1PC 1/2" Dr. Universal Joint
- 2PCS 1/2" Dr. Spark Plug Socket (16,21mm)
- 1PC 1/2" Dr. Combination Extension Bar Plastic Box

32pcs 6pts Blue-rim Socket Set



Item NO.	Size	Volume	📦	📏	RMB
CL101006	32PCS	393x295x78	5	4.62	

- 26PCS 1/2" Dr. Mirror Finished 6PT Socket(8,8,9,10,10,11, 12,13, 14,15,16,17,18,19,20,21,22,23,24, 26,27,28,30,32mm)
- 1PC 1/2" Dr. Ratchet Wrench
- 1PC 1/2" Dr. Bent Bar
- 2PCS 1/2" Dr.Extension Bar(5",10")
- 1PC 1/2" Dr. Shaking Handle
- 1PC 1/2" Dr.Quick Plate

T-series 37 Pcs Maintenance Tool Set



Item NO.	Size	📦	📏	RMB
CL107237	37PCS	1/5		

- 9PCS 1/2" Dr. Mirror Finished 6PT Socket (8,9,10,11,12,13,14,15,16, 17,18, 19,20,21,22,23,24,27,30,32mm)
- 12PCS Mirror Finished Combination Spanner(8,9,10,11,12,13,14,15, 16,17,18,19mm)
- 1PC 1/2" Dr. Quick Release Ratchet Wrench
- 1PC 1/2" Dr. Universal Joint
- 2PCS 1/2" Dr. Spark Plug Socket (16,21mm)
- 1PC 1/2" Dr. Combination Extension Bar Plastic Box

32pcs 12pts Blue-rim Socket Set



Item NO.	Size	Volume	📦	📏	RMB
CL101012	32PCS	393x295x78	5	4.62	

- 26PCS 1/2" Dr. Blue-Rim 12PT Socket(8,8,9,10,10,11,12,12,13,14, 14,15,16,17,18,19,20,21,22, 23,24,26,27,28,30,32mm)
- 1PC 1/2" Dr. Ratchet Wrench
- 1PC 1/2" Dr. Bent Bar
- 2PCS 1/2" Dr.Extension Bar(5",10")
- 1PC 1/2" Dr. Shaking Handle
- 1PC 1/2" Dr.Quick Plate



32pcs Full Polished 12pts Socket Set



Item NO.	Size	Volume	📦	📏	RMB
CL101112	32PCS	393x295x78	5	4.62	

- 6PCS 1/2" Dr. Mirror Finished 6PT Socket(8,8,9,10,10,11,12,12,13,14,14,15,16,17,18,19,20,21,22,23,24, 26,27,28,30,32mm)
- 1PC 1/2" Dr. Ratchet Wrench
- 1PC 1/2" Dr. Bent Bar
- 2PCS 1/2" Dr.Extension Bar(5",10")
- 1PC 1/2" Dr. Shaking Handle
- 1PC 1/2" Dr.Quick Plate

32pcs Blue-rim Socket Set



Item NO.	Size	Volume	📦	📏	RMB
CL101532	32PCS	340x250x85	5	4.55	

- 19PCS 1/2" Dr. Blue-Rim 6PT Socket(8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,24,27,30,32mm)
- 6PCS 1/2" Dr. 12PT Socket (10,12,13,14,17,19mm)
- 2PCS 1/2" Dr. Spark Plug Socket(16,21mm)
- 1PC 1/2" Dr. Universal Joint
- 1PC 1/2" Dr. Connector
- 2PC 1/2" Dr. Extension Bar (5",10")
- 1PC 1/2" Dr. Embossing Ratchet Wrench

32pcs Electrophoresis 6pt Socket Set



Item NO.	Size	Volume	📦	📏	RMB
CL100732	32PCS	393x295x78	5		

- 26PCS 1/2" Dr. Electrophoresis 6PT Socket(8,8,9,10,10,11,12,12,13,14,14,15,16,17,18,19,20,21,22,23,24,26,27,28,30,32mm)
- 1PC 1/2" Dr. Ratchet Wrench
- 1PC 1/2" Dr. Bent Bar
- 2PCS 1/2" Dr.Extension Bar(5",10")
- 1PC 1/2" Dr. Shaking Handle
- 1PC 1/2" Dr.Quick Plate

32pcs Full Polished Socket Set



Item NO.	Size	Volume	📦	📏	RMB
CL101801	32PCS	340x250x88	5	4.64	

- 19PCS 1/2" Dr. Mirror Finished 6PT Socket(8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,24,27,30,32mm)
- 6PCS 1/2" Dr. 12PT Socket (10,12,13,14,17,19mm)
- 2PCS 1/2" Dr. Spark Plug Socket(16,21mm)
- 1PC 1/2" Dr. Universal Joint
- 1PC 1/2" Dr. Connector
- 2PC 1/2" Dr. Extension Bar (5",10")
- 1PC 1/2" Dr. Quick Release Ratchet Wrench

32pcs Blue-rim Socket Set



Item NO.	Size	Volume	📦	📏	RMB
CL106732	32PCS	345x252x78	5	4.4	

- 19PCS 1/2" Dr. Mirror Finished 6PT Socket(8,9,10,11,12,13,14, 15,16,17,18,19,20,21,22,24,27,30,32mm)
- 6PCS 1/2" Dr. 12PT Socket (10,12,13,14,17,19mm)
- 2PCS 1/2" Dr. Spark Plug Socket(16,21mm)
- 1PC 1/2" Dr. Universal Joint
- 1PC 1/2" Dr. Connector
- 2PC 1/2" Dr. Extension Bar (5",10")
- 1PC 1/2" Dr. Quick Release Ratchet Wrench

46pcs Mini Type Socket Set



Item NO.	Size	Volume	📦	📏	RMB
CL100446	46PCS	255x166x61	12	1.51	

- 13PCS 1/4" Dr. Socket (4,4.5,5,5.5,6,7,8,9,10,11,12,13,14mm)
- 21PCS 1/4" Dr. 37mm (FD4,FD5.5,FD7mm)(PH1,PH2,PH3), (PZ1,PZ 2,PZ3), (T10,T15,T20,T25,T30,T40) (HW3,HW4,HW5,HW6,HW7,HW8mm)
- 3PCS Hex Spanners
- 2PCS 1/4" Dr. Extension Bar 2",4"
- 1PC 1/4" Dr. Flexible Extension Bar
- 1PC 1/4" Dr. Sliding Bar
- 1PC 1/4" Dr. Screwdriver Handle
- 1PC 1/4" Dr. Ratchet wrench
- 1PC 1/4" Dr. Bit Holder
- 1PC 1/4" Dr. Universal Joint
- 1PC 1/4" Dr. Mirror Finished Bent Bar

60 Pcs Socket Set



Item NO.	Size	Volume	📦	📏	RMB
CL106560	60PCS	335x252x80	6	4.46	

- 18pcs 3/8" mirror 6pt socket (6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24mm)
- 9pcs 3/8" mirror extended 6pt socket (8, 10, 11, 12, 13, 14, 15, 17, 19mm)
- 3pcs 3/8" screw driver socket slotted (FD5.5, FD6.5, FD8)
- 4pcs 3/8" screw driver socket 6pt (HW3, HW4, HW5, HW6, HW7, HW8, HW10)
- 9pcs 3/8" screw driver socket torx(T10, T15, T20, T25, T27, T30, T45, T50, T55)
- 3pcs 3/8" screw driver socket cross (PH1, PH2, PH3)
- 3pcs 3/8" screw driver socket torx (PZ1, PZ2, PZ3)
- 3pcs 3/8" mirror extension bar (3", 10")
- 1pc 3/8" quickly remove the ratchet wrench
- 1pc 3/8" mirror universal joint
- 2pcs 3/8" spark plug socket (16, 21mm)
- 1pc three use sliding head

53pcs Socket Set



Item NO.	Size	Volume	📦	📏	RMB
CL100453	53+1PCS	255x165x61	12	1.75	

- 13pcs of 1/4" 6pt socket (4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm)
- 21pcs 1/4" screw driver socket:slotted (0.6X4, 1.0X5.5, 1.2X7mm); Cross (PH1, PH2, PH3);torx (PZ1, PZ2, PZ3);Star type(hollow) (T10, T15, T20, T25, T30, T40);Hexagon (HW3, HW4, HW5, HW6, HW7, Hw8)
- 2pcs 1/4" extension bar (1/4"X2 "1/4"X4")
- 7pcs 1/4" mirror extended 6pt socket 6, 7, 8, 10, 12, 13, 14mm
- 1pc 1/4 "sliding bar
- 1pc 1/4 " quickly remove the ratchet wrench
- 3pcs hex key wrench 1.5,2,3
- 1pc 1/4 "handle
- 1pc 1/4 "Universal joint
- 1pc 1/4 "screw driver socket connector
- 1pc 1/4 "soft extension bar (6")
- Complimentary 1/4 "mirror bent bar



12pcs Socket Set



- 10PCS 1/4" Dr .Socket (4,5,6,7,8,9,10,11,12,13mm)
- 1PC 1/4" Dr . Extension Bar 100mm
- 1PC 1/4" Dr .Quick Release Ratchet Wrench



Item NO.	Size	Volume	📏	📦	RMB
CL105612	12PCS	157x78x40	20	0.45	

20pcs Socket Set



- 18PCS 3/8" Dr .Socket (6,7,8,9,10,11,12,13,14,15,16,17,18,19,20,21,22,24mm)
- 1PC 3/8" Dr . Extension Bar 125mm
- 1PC 3/8" Dr .Quick Release Ratchet Wrench



Item NO.	Size	Volume	📏	📦	RMB
CL105720	20PCS	340x147x51	12	1.44	

28pcs Socket Set



- 12PCS 1/4" Dr .Socket (4,4.5,5,5.5,6,7,8,9,10,11,12,13mm)
- 14PCS 1/4" Dr. 37mm (FD4,FD5.5,FD7),(PH1,PH2),(T10,T15,T20,T25,T30),(HW3,HW4,HW5,HW6)
- 1PC 1/4" Dr . Extension Bar 100mm
- 1PC 1/4" Dr .Quick Release Ratchet Wrench



Item NO.	Size	Volume	📏	📦	RMB
CL105628	28PCS		12		

20pcs Socket Set



- 10PCS 1/2" Dr .Socket (8,9,10,11,12,13,14,15,16,17,18,19,20,22,24,27,30,32mm)
- 1PC 1/2" Dr . Extension Bar 125mm
- 1PC 1/2" Dr .Quick Release Ratchet Wrench



Item NO.	Size	Volume	📏	📦	RMB
CL105820	20PCS	370x170x55	8	2.65	

12pcs Socket Set



- 10PCS 3/8" Dr .Socket (10,11,12,13,14,15,16,17,19,21,22mm)
- 1PC 3/8" Dr . Extension Bar 100mm
- 1PC 3/8" Dr .Quick Release Ratchet Wrench



Item NO.	Size	Volume	📏	📦	RMB
CL105712	12PCS		16		

12pcs Socket Set



- 10PCS 1/2" Dr .Socket (10,11,12,13,14,15,17,19,22,24mm)
- 1PC 1/2" Dr . Extension Bar 125mm
- 1PC 1/2" Dr .Quick Release Ratchet Wrench



Item NO.	Size	Volume	📏	📦	RMB
CL105812	12PCS	340x105x50	16	1.62	

40pcs Iron Box Screw Driver Socket Set



Item NO.	Size	Volume	🔧	📦	RMB
CL102140	40PCS		10	1.41	

- 7PCS 3/8" Dr. 30mm Bit (T20, T25, T30, T40, T45, T50, T55)
- 5PCS 3/8" Dr. 30mm Bit (M5, M6, M8, M10, M12)
- 7PCS 3/8" Dr. 30mm Bit (HW4, HW5, HW6, HW7, HW8, HW10, HW12)
- 7PCS 3/8" Dr. 70mm Bit (T20, T25, T30, T40, T45, T50, T55)
- 5PCS 3/8" Dr. 70mm Bit (M5, M6, M8, M10, M12)
- 7PCS 3/8" Dr. 70mm Bit (HW4, HW5, HW6, HW7, HW8, HW10, HW12)
- 1PC 1/2" Dr. Bit Connector 10mm
- 1PC 3/8" Dr. Bit Connector 10mm

41pcs Iron Box Screw Driver Socket Set



Item NO.	Size	Volume	🔧	📦	RMB
CL100841	41PCS	280x180x62	10	1.83	

- 7PCS 30XT55 30XT50 30XT40 30XT45 30XT30 30XT25 30XT20
- 5PCS 30X5 30XM6 30XM8 30XM10 30XM12
- 7PCS 30XH4 30XH5 30XH6 30XH7 30XH8 30XH10 30XH12
- 7PCS 70XT55 70XT50 70XT45 70XT40 70XT30 70XT25 70XT20
- 5PCS 70XM5 70XM6 70XM8 70XM10 70XM12
- 7PCS 70XH4 70XH5 70XH6 70XH7 70XH8 70XH10 70XH12
- 3PCS Screwdriver Head 105XMP-10 Snap ring 3/8X10mm 1/2X10mm

10pcs Lengthen Socket Set



Item NO.	Size	Volume	🔧	📦	RMB
CL105410	10PCS	280x104x45	12	2.06	

- 12.5mm series 10mm 12mm 13mm 14mm 15mm 17mm 19mm 21mm 22mm 24mm

8pcs Electrophoresis Square Box Impact Socket Set



Item NO.	Size	Volume	🔧	📦	RMB
CL102708	8PCS		4		

- 1" Dr. Impact Socket (21, 22, 24, 27, 30, 36, 38, 41mm)

14pcs Iron Box Heavy Socket Set



Item NO.	Size	Volume	🔧	📦	RMB
CL102814	14PCS	550x210x100	1	12.16	

- 10PCS 3/4" Dr. Heavy Socket (22, 24, 27, 30, 32, 34, 36, 41, 46, 50mm)
- 2PCS 3/4" Dr. Extension Bar (100, 200mm)
- 1PC 3/4" Dr. Sliding Bar 500mm
- 1PC 3/4" Dr. Ratchet Wrench 500mm



26pcs Iron Box Heavy Socket Set



Item NO.	Size	Volume	🔧	📏	RMB
CL103026	26PCS		1		

- 17PCS 3/4" Dr. Heavy Socket (21,22,23,24,26,27,28,29,30,31,32,34,36,38,40,41,50mm)
- 3PCS 1" Dr. Heavy Socket (55,60,65mm)
- 1PC 3/4" Dr. Adding Force Bar
- 1PC 3/4" Dr. F3/4"-M1" Adapter
- 1PC 3/4" Dr. Ratchet Head
- 2PCS 3/4" Dr. Extension Bar 100mm,200mm
- 1PC 3/4" Dr. Bent Bar

22pcs Iron Box Heavy Socket Set



Item NO.	Size	Volume	🔧	📏	RMB
CL102901	22PCS	715x310x135	1	42.50	

- 17PCS 1" Dr. Socket (36,38,41,46,50,54,55,58,60,63,65,67,70,71,75,77,80mm)
- 2PC 1" Dr. Extension Bar 8" 16"
- 1PC 1" Dr. Ratchet Head
- 1PC 1" Dr. Sliding Bar
- 1PC Iron Box

21pcs Iron Box Heavy Socket Set



Item NO.	Size	Volume	🔧	📏	RMB
CL102921	21PCS	550x210x100	1	13.75	

- 16PCS 3/4" Dr. Heavy Socket (19,21,22,23,24,26,27,29,30,32,35,36,38,41,46,50mm)
- 2PCS 3/4" Dr. Extension Bar (100,200mm)
- 1PC 3/4" Dr. Sliding Bar 500mm
- 1PC 3/4" Dr. Ratchet Wrench 500mm

26pcs Plastic Box Mirror Finish Heavy Socket Set



Item NO.	Size	Volume	🔧	📏	RMB
CL103202	26PCS		1		

- 20PCS 3/4" 1" Dr. Heavy Socket (21,22,23,24,26,27,28,29,30,31,32,34,36,38,41,46,50,55,60,65mm)
- 1PC 3/4" Dr. Adding Force Bar • 1PC 3/4" Dr. Universal Joint
- 1PC 3/4" Dr. Extension Bar 8" • 1PC 3/4" Dr. Sliding Bar
- 1PC 3/4" Dr. Quick Release Ratchet Wrench
- 1PC 3/4" Dr. F20mm-M25mm Adapter


21pcs Plastic Box Mirror Finish Heavy Socket Set



Item NO.	Size	Volume	🔧	📏	RMB
CL103121	21PCS		1		

- 16PCS 3/4" Dr. Heavy Socket (19,21,22,23,24,26,27,29,30,32,35,36,38,41,46,50mm)
- 2PCS 3/4" Dr. Extension Bar (100,200mm)
- 1PC 3/4" Dr. Sliding Bar 500mm
- 1PC 3/4" Dr. Ratchet Wrench 500mm

26pcs Plastic Box Mat Finish Heavy Socket Set



Item NO.	Size	Volume	🔧	📏	RMB
CL103226	26PCS		1	18.75	

- 17PCS 3/4" Dr. Heavy Socket (21,22,23,24,26,27,28,29,30,31,32,34,36,38,40,41,50mm)
- 3PCS 1" Dr. Heavy Socket (55,60,65mm)
- 2PCS 3/4" Dr. Extension Bar 100mm,200mm
- 1PC 3/4" Dr. Adding Force Bar
- 1PC 3/4" Dr. Ratchet Head
- 1PC 3/4" Dr. F3/4"-M1" Adapter
- 1PC 3/4" Dr. Bent Bar

26pcs Plastic Box Electrophoresis Heavy Socket Set



Item NO.	Size	Volume	🔧	📦	RMB
CL103526	26PCS	560x323x135	1	18.70	

- 17PCS 3/4" Dr. Heavy Socket (21,22,23,24,26,27,28,29,30,31,32,34,36,38, 40,41,50mm)
- 3PCS 1" Dr. Heavy Socket (55,60,65mm)
- 1PC 3/4" Dr. Adding Force Bar
- 1PC 3/4" Dr. F3/4"-M1" Adapter
- 1PC 3/4" Dr. Ratchet Head
- 1PC 3/4" Dr. Extension Bar 200mm
- 1PC 3/4" Dr. Bent Bar
- 1PC 3/4" Dr. Sliding Bar 500mm

12pcs Household Tool Set



Item NO.	Size	Volume	🔧	📦	RMB
CL104612	12PCS	296x231x76	6	1.98	

- 2PCS Screwdriver 6*38mm 2PCS Screwdriver 6*100mm
- 1PC Claw Hammer 0.25Kg 1PC Combination Pliers 6"
- 1PC Utility Knife 1PC Tape Measure 3*16mm
- 1PC Adjustable Wrench 8"
- 1PC Digital Tester
- 1PC Electrical Tape
- 1 Art Knife
- 1 Digital Measuring Pen
- 1 Piece Of 3mx16mm Tape Measure
- 1 Piece Of Electrical Tape

59pcs Auto Repairing Tool Set



Item NO.	Size	Volume	🔧	📦	RMB
CL103202	26PCS		1		

- 14PCS 3/8" Dr. 6PT Socket (6,7,8,9,10,11,12,13,14,15,16,17,18,19mm)
- 10PCS Mirror Finished Combination Spanner(8,10,11,12,13,14,15,16,17, 18,19mm)
- 7PCS Anti-Oil Screwdriver (3*75,5*100,6*38mm),(3*75,5*100,6*150,6*38mm)
- 1PC 3/8" Dr. Mirror Finished Universal Joint
- 1PC 3/8" Dr. Mirror Finished Quick Release Ratchet Wrench
- 9PCS Mirror Finished Hex Spanners
- 1PC Adjustable Wrench 8"
- 1PC Mirror Finished Combination Ratchet Wrench(Cr-V)17mm
- 5PCS Changeable Head Snip Ring Pliers
- 1PC Germany Type Combination Pliers 8"
- 1PC Germany Type Long Nose Pliers 6"
- 1PC Molded Tape 3m*16mm
- 1PC Feeler 100*23
- 1PC Utility Knife
- 1PC Stainless Steel Ruler 150mm
- 1PC Flashlight
- 1PC Fiber Handle Ball Hammer 1P
- 1PC 3/8" Dr. Mirror Finished Bent Bar(Cr-V) 10"
- 1PC Flexible Magnetic Bar 1.5LB

118pcs Maintenance Set



Item NO.	Size	Volume	🔧	📦	RMB
CL100102	118PCS	455x356x95	3	8.93	

- 20PCS Bits FD4,FD5,PZ0,PZ1,PZ2,PZ3,PH1,PH2,PH3,PH0,T6,T8, T10,T15,T20,T25,T27,T30,T35,T40)
- 9PCS 1/2"Dr. Socket (10,12,13,14,17,18,19,22,24mm)
- 9PCS 1/4" Dr. Socket(5,6,7,8,9,10,11,12,13mm)
- 7PCS Combination Spanners(10,11,12,13,14,17,19mm)
- 1PC Feller 1PC Waterproof Tape
- 2PCS Rubber Handle Screwdriver Bit 125*6mm
- 2PCS Rubber Handle Screwdriver Bit 38*6mm
- 1PC 1/2" Dr. Quick Release Ratchet Wrench
- 1PC 1/2" Dr. Double Socket 21*23mm
- 1PC 1/2" Dr. Telescopic Wheel Wrench
- 1PC Combination Pliers 6"
- 1PC Long Nose Pliers 6"
- 1PC Screwdriver 200*8mm
- 1PC 1/2" Dr. Spark Plug Socket
- 9PC Ball Hex Spanners
- 1PC Connector 3/8" *1/2"
- 1PC Digital Tester
- 1PC 1/4" Dr. Bit Holder
- 1PC Tape Measure 3m
- 1PC Terminals
- 1PC Strippers
- 1PC 1/2" Dr. Universal Joint
- 1PC 1/2" Dr. Extension Bar
- 1PC 1/2" Dr. Sliding Head
- 1PC 1/4" Dr. Extension Bar
- 1PC Adjustable Wrench 10"
- 1PC Ball Hammer 1.5P



24pcs Household Tool Set



Item NO.	Size	Volume	📦	📏	RMB
CL100103	24PCS	295x230x77	6	2.38	

- 10PCS Bits (FD4,FD5,PZ0,PZ1,PZ2,PZ3,PH0,PH1,PH2,PH3)
- 2PCS Screwdriver 100*6mm
- 2PCS Screwdriver 75*5mm
- 1PC Adjustable Wrench 8"
- 1PC 1/4" Dr. Bit Holder
- 1PC Long Nose Pliers 6"
- 1PC Tape Measure 2m
- 1PC Diagonal Pliers 6"
- 1PC Claw Hammer
- 1PC Digital Tester
- 1PC 1/4" Dr. Extension Bar
- 1PC 9LED Flashlight
- 1PC Utility Knife

Gifts: 1Box Utility Knife Blade

35pcs Household Tool Set



Item NO.	Size	Volume	📦	📏	RMB
CL104835	35PCS	360x275x75	6	3.09	

- 10PCS Bit(FD4,FD5,PH0,PH1,PH2,PH3,PZ0,PZ1,PZ2,PZ3)
- 2PCS Screwdriver 6*38mm 2PCS Screwdriver 6*100mm
- 8PCS Hex Spanners (1.5,2,2.5,3,4,5,5.5,6mm)
- 1PC 1/4" Dr. Square Extension Bar
- 1PC Combination Pliers
- 1PC Utility Knife
- 1PC Claw Hammer
- 1PC Flashlight
- 1PC Tape
- 1PC Water Pump Pliers
- 1PC Digital Tester
- 1PC Tape Measure 3m*16mm
- 1PC Scissors
- 1PC Adjustable Wrench

16pcs Household Tool Set



Item NO.	Size	Volume	📦	📏	RMB
CL104716	16PCS	295x228x77	6	2.05	

- 2PCS Screwdriver 6*100mm
- 5PCS Hex Spanners (2,3,4,5,6mm)
- 1PC Combination Wrench 6"
- 1PC Claw Hammer 0.25Kg
- 1PC Tape Measure 3m*16mm
- 1PC Adjustable Wrench 8"
- 1PC Digital Tester
- 1PC Electrical Tape
- 1PC Utility Knife
- 1PC Flashlight

37pcs Household Tool Set



Item NO.	Size	Volume	📦	📏	RMB
CL105037	37PCS	385x285x75	6	3.30	

- 11PCS 1/4" Dr. Socket (4,4.5,5,5.5,6,7,8,9,10,11,12mm)
- 9PCS Hex Spanners (1.5,2,2.5,3,4,5,6,8,10mm)
- 2PCS Screwdriver 6*38mm
- 1PC Long Nose Pliers 6"
- 1PC Adjustable Wrench 8"
- 1PC Tape Measure 3m*16mm
- 1PC Claw Hammer 0.25kg
- 1PC Scissors
- 1PC Electric Tape
- 1PC Solder Wire
- 2PCS Screwdriver 6*100mm
- 1PC Combination Pliers 8"
- 1PC Utility Knife
- 1PC Tweezers
- 1PC Digital Tester
- 1PC 1/4" Dr. Ratchet Wrench
- 1PC Electric Iron

63pcs Household Tool Set



Item NO.	Size	Volume	📏	📦	RMB
CL104963	63PCS	384x285x75	6	3.21	

- 11PCS 1/4" Dr. Mirror Finished Socket(4,4.5,5,5.5,6,7,8,9,10,11,12mm)
- 10PCS Bits (FD4,FD5,PH0,PH1,PH2,PH3,PZ0,PZ1,PZ2,PZ3)
- 2PCS Screwdriver 6"100mm
- 22PCS Telecommunications Repair Bits
- 1PC Utility Knife 8PCS Hex Spanners
- 1PC 1/4" Dr. Square Extension Bar
- 1PC Molded Tape 3m*16mm
- 1PC Combination Pliers 8"
- 1PC Aluminum Frame Saw
- 1PC Digital Tester
- 1PC Long Nose Pliers 6"
- 1PC Adjustable Wrench 8"
- 1PC Claw Hammer 0.25kg
- 1PC Scissors
- 1PC Bit Holder

62pcs Household Tool Set



Item NO.	Size	Volume	📏	📦	RMB
CL106062	62PCS	385x290x87	6	3.28	

- 2pcs 6x100 Cross&slotted A type screwdrivers with two-color handle
- 22pcs 22pcs of telecommunications maintenance special screwdrivers
- 11pcs 6.3mm series mirror socket 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12mm
- 8pcs hex key wrench (1.5, 2, 2.5, 3, 4, 5, 5.5, 6mm)
- 10pcs batch head (-4, -5, PH0, PH1, PH2, PH3, PZ0, PZ1, /PZ2, PZ3)
- 1pc of 8" high-grade combination pliers
- 1pc 3mx16mm thickened ruler with tape measure
- 1pc 0.25kg claw hammer with plastic-coated fiber handle
- 1pc of 6" high-grade long nose pliers
- 1pc 6.3mm series square extension bar
- 1pc 8" adjustable wrench
- 1pc single piece utility knife
- 1pc 6.3mm series sliding bar
- 1pc cartridge

72 Pcs Telecommunications Repair Tool Set



Item NO.	Size	Volume	📏	📦	RMB
CL105172	72PCS	385x288x82	5	3.79	

- 10PCS Bits (FD4,FD5,PH0,PH1,PH2,PH3,PZ0,PZ1,PZ2,PZ3)
- 11PCS 1/4" Dr.Mirror Finished Socket(4,4.5,5,5.5,6,7,8,9,10,11,12mm)
- 2PCS Screwdriver 6"100mm
- 2PCS Screwdriver 6"38mm
- 2PCS Screwdriver 3"75mm
- 22PCS Telecommunications Repair Bits
- 1PC Digital Multimeter1PC 30W Electric Iron
- 1PC 1/4" Dr. Square Extension Bar
- 1PC Molded Tape 3m*16mm
- 1PC Long Nose Pliers 6"
- 1PC Combination Pliers 6"
- 1PC Adjustable Wrench 8"
- 1PC Utility Knife
- 1PC Digital Tester
- 1PC Claw Hammer 0.25kg
- 1PC 1/4" Dr. Ratchet Wrench
- 1PC Bit Holder
- 1PC Combination Strippers
- 1PC Portable Solder Wire
- 1PC Desoldering Pump
- 8PCS Hex Spanners

Professional Auto Emergency Repairing Set



Item NO.	Size	Volume	📏	📦	RMB
CL104501			1		

- 2PCS 6"150 Screwdrivers
- 1PC Adjustable Wrench 250mm
- 1PC Combination Pliers 200mm
- 1PC Multifunction Electrician's Knife
- 1PC Insulation Tape
- 1PC Lifesaving Whistle
- 1PC Puncture Needle
- 1PC Tyre Strips
- 1PC LED Working Lamp
- 1PC AA Batteries
- 1PC Taps Dies
- 1PC Telescopic Wheel Wrench
- 1PC Mini Truck Inflator
- 1PC Sheet Metal Hammers
- 1PC Multifunction Shovel
- 1PC Tow Rope
- 1PC Car Battery Emergency Line
- 1PC 1/2" Dr. Socket (17*19,21*23)



50pcs Household Tool Set



Item NO.	Size	Volume	Weight	Price	RMB
CL104150	50PCS		4		

- 12PCS 1/4" Dr. 6PT Socket (4,4.5,5,5.5,6,7,8,9,10,11,12,13mm)
- 10PCS Bits (FD4,FD5,PZ0,PZ1,PZ2,PZ3,PH1,PH2,PH3,PH0)
- 2PCS Screwdriver 90mm
- 2PCS Screwdriver 6"100mm
- 1PC Multimeter
- 1PC Digital Tester
- 1PC Flashlight
- 1PC Crimping Tool
- 1PC Long Nose Pliers 6"
- 1PC Diagonal Pliers 6"
- 1PC Adjustable Wrench 8"
- 1PC Plastic Tape 2m*16mm
- 1PC Suction Tin
- 2PCS 3"100mm Screwdrivers
- 1PC Brush
- 1PC Solder Wire
- 2PCS 3"150mm Screwdrivers
- 1PC Tweezers
- 1PC Electric Iron
- 1PC Square Extension Bar
- 2PCS Adhesive A,B
- 1PC 1/4" Dr. Connector

36pcs Household Tool Set



Item NO.	Size	Volume	Weight	Price	RMB
NT1006	36PCS		4	2.07	

- 1PC Measure Tape 3m*19mm
- 1PC Long Nose Pliers 6"
- 1PC Combination Pliers 6"
- 1PC flashlight
- 1PC Claw Hammer
- 1PC Digital Tester
- 1PC Utility Knife
- 1PC Adjustable Wrench 8"
- 2PCS Screwdriver 5"75mm,6"100mm
- 2PCS Screwdriver 5"75mm,6"100mm
- 1PC Insulation Tape
- 8PCS Hex Spanners
- 1PC Utility Knife
- 14PCS Tool Box

53pcs Set Aluminum Alloy Box Household Tool Set



Item NO.	Size	Volume	Weight	Price	RMB
CL106653	53PCS		4		

- 1pc transparent plastic case steel tape measure 5m*19mm
- 1pc multifunctional combination pliers and stripper 9"
- 10pcs SK4 utility blades 18mm
- 1pc stainless steel electronic scissors 8"
- 1pc professional grade pruning shears 8" (elbow)
- 1pc professional grade single piece utility knife 18mm
- 1pc insulation tape
- 22pcs 22pcs of telecommunications maintenance special screwdrivers
- 1pc non-contact test pencil
- 1pc large opening adjustable wrench 200*46mm
- 1pc B-series screwdriver 6X100 slotted
- 1pc B-series screwdriver 6X100 cross
- 1pc claw hammer with plastic-coated fiber handle 0.25Kg
- 1pc strong light aluminum alloy LED flashlight
- 8pcs 8pcs folding flat head hex key wrench
- 1pc anti-static stainless steel straight head tweezers

25pcs Household Tool Set



Item NO.	Size	Volume	Weight	Price	RMB
NT1005	25PCS			1.06	

- 1PC Adjustable Wrench 8"
- 1PC Combination Pliers 6"
- 1PC Measure Tape 3m*19mm
- 1PC Digital Tester 1PC Utility Knife
- 1PC 1/4" Dr. Square Extension Bar
- 8PCS Hex Spanners
- 1PC Bit Holder
- 10PCS Bits

23pcs Household Tool Set



Item NO.	Size	Volume			RMB
NT1001	23PCS			2.61	

- 1PC Adjustable Wrench 8"
- 1PC Combination Pliers 6"
- 1PC Measure Tape 3m*19mm
- 1PC Utility Knife
- 1PC Digital Tester
- 1PC Claw Hammer
- 2PCS Screwdriver 6*100mm
- 8PCS Hex Spanners
- 10PCS Knife Blade

19pcs Socket Wrench Set



Item NO.	Size	Volume			RMB
CL100719	19PCS			3.26	

- 12 pieces of 1/2 "PCS drums (10, 11, 12, 13, 14, 15, 17, 20, 22, 24, 27, 30mm)
- Two 1/2 "extension rods (1/2" X5 ", 1/2" X10 ")
- 1 piece of 1/2 "sliding head
- 1 piece of 1/2 "bent rod

123pcs Household Tool Set



Item NO.	Size	Volume			RMB
NT1002	123PCS	385x285x85		3.54	

- 11PCS 1/4" Dr. Mirror Finished 6PT Socket (4,4.5,5,5.5,6,7,8,9,10,11,12mm)
- 1PC Utility Knife
- 10PCS Utility Knife Blade
- 1PC Claw Hammer 0.25kg
- 1PC Plastic Measure Tape 3m*19mm
- 4PCS Screwdriver 3*75mm,6*100mm
- 1PC Long Nose Pliers 6"
- 1PC Combination Pliers 7"
- 1PC Adjustable Wrench 8"
- 1PC Digital Tester
- 1PC Insulation Tape
- 1PC Waterproof Tape
- 1PC Mini Aluminum Frame Saw
- 1PC Tweezers
- 10PCS Bits
- 1PC 1/4" Dr. Extension Bar
- 1PC 1/4" Dr. Sliding Bar
- 1PC Scissors
- 10PCS Watch Bits
- 8PCS Hex Spanners
- 1PC Flashlight
- 60PCS Tool Box

High Quality Household Drill Tool Set



Item NO.	Size	Volume			RMB
NT1003		460x353x103		6.29	

- 1PC Drill 780W 10PCS Bits
- 1PC Screwdriver 6*100mm
- 1PC Screwdriver 6*100mm
- 1PC Digital Tester
- 10PCS Utility Knife Blade
- 1PC Magnetic Foot Level 225mm
- 4PCS Drill Head (4,5,6,8mm)
- 4PCS Twist Drill Head (4,5,6,8mm)
- 1PC Adjustable Wrench 8"
- 6PCS Watch Bit
- 1PC LED Aluminum Alloy Flashlight
- 1PC Bit Connector
- 1PC Stripper
- 8PCS Hex Spanners
- 1PC Insulation Tape
- 1PC Claw Hammer 0.25kg
- 1PC Long Nose Pliers 6"
- 1PC Combination Pliers 6"
- 1PC Measure Tape 3m
- 1PC Utility Knife
- 1PC Water Pump Pliers 10"
- 1PC Aluminum Frame Saw
- 1PC 1/4" Dr. Extension Bar
- 1PC Bit Holder



SOCKET ACCESSORIES



1/4" Full Polished 6pt Socket



Item NO.	Size	L(mm)	W(mm)	ØQ(mm)	ØH(mm)			RMB
CL201004	4mm	25	9	12	7	16		
CL201005	5mm	25	9	12	8	16		
CL201006	6mm	25	10	12	9.5	16		
CL201007	7mm	25	10	12	11	16		
CL201008	8mm	25	11	11	12	16		
CL201009	9mm	25	10	11.5	13	12		
CL201010	10mm	25	10	12	14.5	9		
CL201011	11mm	25	9	14	16	9		
CL201012	12mm	25	9	14.5	17	9		
CL201013	13mm	25	9	15.5	18	12		
CL201014	14mm	25	12	17.5	20	9		
CL201045	4.5mm	25	9	12	7	16		
CL201055	5.5mm	25	10	12	9	16		
CL201065	6.5mm	25	10	12	10	16		

- Meet ISO 2725 DIN 3124 manufacturing requirements
- High quality chromium-vanadium steel forging, thin wall design, electroplated bright chromium is not easy to rust
- High torque, middle knurled non-slip design
- Note: Manual socket is not suitable for pneumatic tools

3/8" Full Polished 6PT Socket



Item NO.	Size	L(mm)	W(mm)	ØQ(mm)	ØH(mm)			RMB
CL200906	6mm	28	9	17	10	16		
CL200907	7mm	28	9	17	10	16		
CL200908	8mm	28	9	17	11	16		
CL200909	9mm	28	9	17	13	16		
CL200910	10mm	28	10	17	13	16		
CL200911	11mm	28	10	17	14	16		
CL200912	12mm	28	10	17	14	12		
CL200913	13mm	28	10	18	18	12		
CL200914	14mm	28	10	20	20	9		
CL200915	15mm	28	14	22	22	9		
CL200916	16mm	28	14	22	22	8		
CL200917	17mm	30	14	24	24	6		
CL200918	18mm	30	16	26	26	5		
CL200919	19mm	30	16	26	26	5		
CL200920	20mm	30	16	28	24	5		
CL200921	21mm	30	15	28	28	4		
CL200922	22mm	30	15	26	30	4		
CL200924	24mm	32	15	32	32	4		

1/4" Full Polished 6pt Socket



Item NO.	Size	L(mm)	W(mm)	ØQ(mm)	ØH(mm)			RMB
CL201604	4mm	12.5	50	12	7	8		
CL201605	5mm	11	50	11	8	8		
CL201606	6mm	12	50	12	9	8		
CL201607	7mm	20	50	12	11	7		
CL201608	8mm	23	50	12	12	7		
CL201609	9mm	25	50	13	13	6		
CL201610	10mm	21	50	14	14	10		
CL201611	11mm	20	50	16	16	8		
CL201612	12mm	25	50	17	17	7		
CL201613	13mm	25	50	18	18	6		
CL201614	14mm	25	50	19.5	19.5	5		
CL201645	4.5mm	12	50	12	7	8		
CL201655	5.5mm	11	50	12	8.5	8		

- Meet ISO 2725 DIN 3124 manufacturing requirements
- High quality chromium-vanadium steel forging, thin wall design, electroplated bright chromium is not easy to rust
- High torque, middle knurled non-slip design
- Note: Manual socket is not suitable for pneumatic tools


3/8" Deep Full Polished 6pt Socket



Item NO.	Size	L(mm)	W(mm)	ØQ(mm)	ØH(mm)			RMB
CL201506	6mm	63	13	17	10	7		
CL201507	7mm	63	20	17	11	7		
CL201508	8mm	63	30	17	11	7		
CL201509	9mm	63	30	17	13	7		
CL201510	10mm	63	27	17	15	7		
CL201511	11mm	63	34	17	16	7		
CL201512	12mm	63	27	18	18	6		
CL201513	13mm	63	27	19	19	5		
CL201514	14mm	63	29	20	20	5		
CL201515	15mm	63	29	22	22	3		
CL201516	16mm	63	29	22	22	3		
CL201517	17mm	63	27	24	24	3		
CL201518	18mm	63	28	22	25	2		
CL201519	19mm	63	28	23	26	2		
CL201520	20mm	63	27	24	28	2		
CL201521	21mm	63	27	25	28	2		
CL201522	22mm	63	28	26	30	2		
CL201524	24mm	63	25	28	32	2		19.25




- » 1/2" Blue-rim 6pt Metric Socket
- » 1/2" Blue-rim 12pt Metric Socket
- » 1/2" Full Polished 6pt Socket
- » 1/2" Blue-rim 12pt Metric Socket
- » 1/2" Full Polished 6pt Socket
- » 1/2" Full Polished 12pt Socket



Size	L(mm)	W(mm)	QH(mm)	Q(mm)
8mm	38	14	22	12
9mm	38	14	22	14
10mm	38	14	22	16
11mm	38	14	22	17
12mm	38	14	22	18
13mm	38	14	22	19
14mm	38	14	22	20
15mm	38	14	22	21
16mm	38	14	22	24
17mm	38	14	22	24
18mm	38	14	24	26
19mm	38	17	24	26
20mm	38	17	26	28
21mm	38	17	26	28
22mm	38	17	26	30
23mm	38	17	28	32
24mm	38	17	28	32
25mm	40	20	30	34
26mm	42	21	32	36
27mm	42	21	32	36
28mm	44	22	34	38
30mm	44	22	36	40
32mm	44	22	32	42

- » 1/2" Deep Blue-rim 6pt Metric Socket
- » 1/2" Deep Blue-rim 12pt Metric Socket
- » 1/2" Full Polished Deep 6pt Socket
- » 1/2" Deep Blue-rim 12pt Metric Socket
- » 1/2" Full Polished Deep 6pt Socket
- » 1/2" Mat Finish 6pt Socket



Size	L(mm)	W(mm)	QH(mm)	Q(mm)
8mm	77	17	22	14
9mm	77	17	22	15
10mm	77	25	22	16
11mm	77	26	22	17
12mm	77	26	22	18
13mm	77	31	22	19
14mm	77	33	22	20
15mm	77	33	21	22
16mm	77	35	22	24
17mm	77	35	23	24
18mm	77	35	24	26
19mm	77	34	24	26
20mm	77	35	26	28
21mm	77	31	26	30
22mm	77	31	26	30
23mm	77	31	28	32
24mm	77	31	28	32
27mm	77	31	32	36
30mm	77	31	34	40
32mm	77	31	36	42



Special arc inner Angle design increases torque by 30%, can effectively reduce nut sharp Angle wear, operation does not slip, high safety.

This product is made of high quality chromium vanadium steel, with thin, strong function.

VDE
绝缘



1/2" Blue-rim 6pt Metric Socket



- Meet ISO 2725 DIN 3124 manufacturing requirements
- High quality chromium-vanadium steel forging, thin wall design, electroplated bright chromium is not easy to rust
- High torque, middle roll printing blue ribbon color design
- Note: Manual socket is not suitable for pneumatic tools

Item NO.	Size			RMB
CL200108	8mm	24/480	0.05	
CL200109	9mm	24/480	0.05	
CL200110	10mm	24/480	0.05	
CL200111	11mm	24/480	0.05	
CL200112	12mm	24/480	0.05	
CL200113	13mm	24/480	0.06	
CL200114	14mm	24/480	0.06	
CL200115	15mm	24/480	0.06	
CL200116	16mm	20/400	0.07	
CL200117	17mm	20/400	0.06	
CL200118	18mm	15/300	0.08	
CL200119	19mm	15/300	0.06	
CL200120	20mm	15/300	0.08	
CL200121	21mm	12/240	0.07	
CL200122	22mm	12/240	0.09	
CL200123	23mm	11/220	0.12	
CL200124	24mm	11/220	0.11	
CL200125	25mm	8/160	0.12	
CL200126	26mm	8/160	0.16	
CL200127	27mm	8/160	0.15	
CL200128	28mm	6/120	0.19	
CL200130	30mm	6/120	0.20	
CL200132	32mm	6/120	0.22	

1/2" Deep Blue-rim 6pt Metric Socket



- Meet ISO 2725 DIN 3124 manufacturing requirements
- High quality chromium-vanadium steel forging, thin wall design, electroplated bright chromium is not easy to rust
- High torque, middle roll printing blue ribbon color design
- Note: Manual socket is not suitable for pneumatic tools

Item NO.	Size			RMB
CL201208	8mm	24/240	0.11	
CL201209	9mm	24/240	0.11	
CL201210	10mm	24/240	0.10	
CL201211	11mm	24/240	0.11	
CL201212	12mm	24/240	0.10	
CL201213	13mm	24/240	0.11	
CL201214	14mm	24/240	0.11	
CL201215	15mm	24/240	0.11	
CL201216	16mm	20/200	0.10	
CL201217	17mm	19/190	0.12	
CL201218	18mm	15/150	0.15	
CL201219	19mm	15/150	0.14	
CL201220	20mm	14/140	0.18	
CL201221	21mm	12/120	0.16	
CL201222	22mm	12/120	0.19	
CL201223	23mm	11/110	0.23	
CL201224	24mm	11/110	0.21	
CL201227	27mm	8/80	0.39	
CL201230	30mm	6/60	0.40	
CL201232	32mm	6/60	0.42	



1/2" Blue-rim 12pt Metric Socket



- Meet ISO 2725 DIN 3124 manufacturing requirements
- High quality chromium-vanadium steel forging, thin wall design, electroplated bright chromium is not easy to rust
- High torque, middle roll printing blue ribbon color design
- Note: Manual socket is not suitable for pneumatic tools

Item NO.	Size			RMB
CL200208	8mm	24/480	0.05	
CL200209	9mm	24/480	0.05	
CL200210	10mm	24/480	0.05	
CL200211	11mm	24/480	0.05	
CL200212	12mm	24/480	0.05	
CL200213	13mm	24/480	0.06	
CL200214	14mm	24/480	0.06	
CL200215	15mm	24/480	0.06	
CL200216	16mm	20/400	0.07	
CL200217	17mm	20/400	0.06	
CL200218	18mm	15/300	0.08	
CL200219	19mm	15/300	0.06	
CL200220	20mm	15/300	0.08	
CL200221	21mm	12/240	0.07	
CL200222	22mm	12/240	0.09	
CL200223	23mm	11/220	0.12	
CL200224	24mm	11/220	0.11	
CL200225	25mm	8/160	0.12	
CL200226	26mm	8/160	0.16	
CL200227	27mm	8/160	0.15	
CL200228	28mm	6/120	0.19	
CL200230	30mm	6/120	0.20	
CL200232	32mm	6/120	0.22	

1/2" Deep Blue-rim 12pt Metric Socket



- Meet ISO 2725 DIN 3124 manufacturing requirements
- High quality chromium-vanadium steel forging, thin wall design, electroplated bright chromium is not easy to rust
- High torque, middle roll printing blue ribbon color design
- Note: Manual socket is not suitable for pneumatic tools

Item NO.	Size			RMB
CL201108	8mm	24/240	0.11	
CL201109	9mm	24/240	0.11	
CL201110	10mm	24/240	0.10	
CL201111	11mm	24/240	0.11	
CL201112	12mm	24/240	0.10	
CL201113	13mm	24/240	0.11	
CL201114	14mm	24/240	0.11	
CL201115	15mm	24/240	0.11	
CL201116	16mm	20/200	0.10	
CL201117	17mm	19/190	0.12	
CL201118	18mm	15/150	0.15	
CL201119	19mm	15/150	0.14	
CL201120	20mm	14/140	0.18	
CL201121	21mm	12/120	0.16	
CL201122	22mm	12/120	0.19	
CL201123	23mm	11/110	0.23	
CL201124	24mm	11/110	0.21	
CL201127	27mm	8/80	0.39	
CL201130	30mm	6/60	0.40	
CL201132	32mm	6/60	0.42	

VDE
绝缘

1/2" Full Polished 6pt Socket



- Meet ISO 2725 DIN 3124 manufacturing requirements
- High quality chromium-vanadium steel forging, thin wall design, electroplated bright chromium is not easy to rust
- High torque, middle roll printing blue ribbon color design
- Note: Manual socket is not suitable for pneumatic tools

Item NO.	Size			RMB
CL200408	8mm	24/480	0.05	
CL200409	9mm	24/480	0.05	
CL200410	10mm	24/480	0.05	
CL200411	11mm	24/480	0.05	
CL200412	12mm	24/480	0.05	
CL200413	13mm	24/480	0.06	
CL200414	14mm	24/480	0.05	
CL200415	15mm	24/480	0.07	
CL200416	16mm	20/400	0.07	
CL200417	17mm	20/400	0.07	
CL200418	18mm	15/300	0.08	
CL200419	19mm	15/300	0.07	
CL200420	20mm	15/300	0.08	
CL200421	21mm	12/240	0.08	
CL200422	22mm	12/240	0.09	
CL200423	23mm	11/220	0.11	
CL200424	24mm	11/220	0.11	
CL200425	25mm	8/160	0.13	
CL200426	26mm	8/160	0.17	
CL200427	27mm	8/160	0.15	
CL200428	28mm	6/120	0.20	
CL200430	30mm	6/120	0.21	
CL200432	32mm	6/120	0.22	

1/2" Full Polished Deep 6pt Socket



- Meet ISO 2725 DIN 3124 manufacturing requirements
- High quality chromium-vanadium steel forging, thin wall design, electroplated bright chromium is not easy to rust
- High torque, middle roll printing blue ribbon color design
- Note: Manual socket is not suitable for pneumatic tools

Item NO.	Size			RMB
CL201308	8mm	24/240	0.10	
CL201309	9mm	24/240	0.10	
CL201310	10mm	24/240	0.10	
CL201311	11mm	24/240	0.10	
CL201312	12mm	24/240	0.11	
CL201313	13mm	24/240	0.11	
CL201314	14mm	24/240	0.11	
CL201315	15mm	24/240	0.11	
CL201316	16mm	20/200	0.14	
CL201317	17mm	19/190	0.13	
CL201318	18mm	15/150	0.15	
CL201319	19mm	15/150	0.14	
CL201320	20mm	14/140	0.17	
CL201321	21mm	12/120	0.16	
CL201322	22mm	12/120	0.19	
CL201323	23mm	11/110	0.23	
CL201324	24mm	11/110	0.22	
CL201327	27mm	8/80	0.28	
CL201330	30mm	6/60	0.35	
CL201332	32mm	6/60	0.38	



1/2" Full Polished 12pt Socket



- Meet ISO 2725 DIN 3124 manufacturing requirements
- High quality chromium-vanadium steel forging, thin wall design, electroplated bright chromium is not easy to rust
- High torque, middle roll printing blue ribbon color design
- Note: Manual socket is not suitable for pneumatic tools

Item NO.	Size			RMB
CL200508	8mm	24/480	0.05	
CL200509	9mm	24/480	0.05	
CL200510	10mm	24/480	0.05	
CL200511	11mm	24/480	0.05	
CL200512	12mm	24/480	0.05	
CL200513	13mm	24/480	0.06	
CL200514	14mm	24/480	0.05	
CL200515	15mm	24/480	0.05	
CL200516	16mm	20/400	0.05	
CL200517	17mm	20/400	0.04	
CL200518	18mm	15/300	0.08	
CL200519	19mm	15/300	0.07	
CL200520	20mm	14/280	0.08	
CL200521	21mm	12/240	0.07	
CL200522	22mm	12/240	0.09	
CL200523	23mm	11/220	0.11	
CL200524	24mm	11/220	0.11	
CL200525	25mm	8/160	0.13	
CL200526	26mm	8/160	0.15	
CL200527	27mm	8/160	0.15	
CL200528	28mm	6/120	0.18	
CL200530	30mm	6/120	0.19	
CL200532	32mm	6/120	0.21	

1/2" Mat Finish 6pt Socket



- Meet ISO 2725 DIN 3124 manufacturing requirements
- High quality chromium-vanadium steel forging, thin wall design, electroplated bright chromium is not easy to rust
- High torque, middle roll printing blue ribbon color design
- Note: Manual socket is not suitable for pneumatic tools

Item NO.	Size			RMB
CL200308	8mm	24/480	0.05	
CL200309	9mm	24/480	0.05	
CL200311	11mm	24/480	0.05	
CL200312	12mm	24/480	0.05	
CL200315	15mm	24/480	0.05	
CL200318	18mm	15/300	0.08	
CL200319	19mm	15/300	0.07	
CL200320	20mm	15/280	0.08	
CL200321	21mm	12/240	0.07	
CL200322	22mm	12/240	0.09	
CL200323	23mm	11/220	0.11	
CL200324	24mm	11/220	0.11	
CL200325	25mm	8/160	0.13	
CL200326	26mm	8/160	0.15	
CL200327	27mm	8/160	0.15	
CL200328	28mm	6/120	0.18	
CL200330	30mm	6/120	0.19	
CL200332	32mm	6/120	0.21	

1/2" Full Polished 6pt Socket



- Meet ISO 2725 DIN 3124 manufacturing requirements
- Forged high quality carbon steel, thin wall design, electroplated bright chromium
- Not easy to rust, beautiful and strong, high torque
- Top or middle knurled non-slip design
- Note: Manual socket is not suitable for pneumatic tools.

Item NO.	Size	1/2"	1/2"	RMB
TG200108	8mm	20 /300	0.04	
TG200109	9mm	20 /300	0.05	
TG200110	10mm	20 /300	0.05	
TG200111	11mm	20 /300	0.04	
TG200112	12mm	20 /300	0.05	
TG200113	13mm	20 /300	0.05	
TG200114	14mm	20 /300	0.05	
TG200115	15mm	20 /300	0.06	
TG200116	16mm	20 /400	0.05	
TG200117	17mm	20 /320	0.07	
TG200118	18mm	17 /272	0.08	
TG200119	19mm	17 /272	0.07	
TG200120	20mm	10 /150	0.09	
TG200121	21mm	14 /224	0.09	
TG200122	22mm	11/176	0.11	
TG200123	23mm	10 /200	0.13	
TG200124	24mm	10 /200	0.12	
TG200127	27mm	10 /160	0.16	
TG200130	30mm	8 /128	0.22	
TG200132	32mm	8 /128	0.25	

1/2" Mat Finish 6pt Socket



- Meet ISO 2725 DIN 3124 manufacturing requirements
- Forged high quality carbon steel, thin wall design, surface sand fine nickel rust prevention
- Easy to rust, high torque, middle knurling anti-skid design.
- Note: Manual socket is not suitable for pneumatic tools.

Item NO.	Size	1/2"	1/2"	RMB
TG200208	8mm	24 /480		
TG200209	9mm	24 /480		
TG200210	10mm	24 /480		
TG200211	11mm	24 /480		
TG200212	12mm	24 /480		
TG200213	13mm	24 /480		
TG200214	14mm	24 /300		
TG200215	15mm	24 /480		
TG200216	16mm	20 /400		
TG200217	17mm	15 /300		
TG200218	18mm	15 /300		
TG200219	19mm	14 /280		
TG200220	20mm	14 /280		
TG200221	21mm	12 /240		
TG200222	22mm	12 /240		
TG200223	23mm	12 /240		
TG200224	24mm	11 /220		
TG200225	25mm	12 /160		
TG200226	26mm	12 /240		
TG200227	27mm	8 /160		
TG200228	28mm	6 /120		
TG200230	30mm	6 /120		
TG200232	32mm	6 /120		



1/2" Electrophoresis Air Impact Socket



- Meet the manufacturing requirements of DIN 3129
- High quality chromium-vanadium steel forging, hardening heat treatment with tip holes
- Surface electrophoretic anti-rust treatment, high torque, strong and durable
- It can be used as manual and pneumatic

	Item NO.	Size		⌀	RMB
6PT	CL200708	8mm	20/400	0.06	
	CL200709	9mm	20/400	0.06	
	CL200710	10mm	20/400	0.07	
	CL200711	11mm	20/400	0.07	
	CL200712	12mm	20/400	0.07	
	CL200713	13mm	20/400	0.07	
	CL200714	14mm	20/400	0.07	
	CL200715	15mm	20/400	0.08	
	CL200716	16mm	20/400	0.07	
	CL200717	17mm	15/300	0.09	
	CL200718	18mm	14/280	0.11	
	CL200719	19mm	14/280	0.10	
	CL200720	20mm	12/240	0.12	
	CL200721	21mm	12/240	0.12	
	CL200722	22mm	11/220	0.12	
	CL200723	23mm	8/160	0.15	
	CL200724	24mm	8/160	0.14	
	CL200725	25mm	8/160	0.16	
	CL200726	26mm	8/160	0.15	
	CL200727	27mm	6/120	0.18	
12PT	CL200728	28mm	6/120	0.22	
	CL200730	30mm	6/120	0.24	
	CL200732	32mm	6/120	0.26	
	CL200734	34mm	4/80	0.28	
	CL200736	36mm	4/80	0.31	
	CL200741	41mm	6/48		
	CL200746	46mm	6/48		
	CL200701	34mm	4/80	0.28	
	CL200702	36mm	4/80	0.31	

1/2" Deep Air Impact 6pt (Electrophoresis) Socket



- Meet the manufacturing requirements of DIN 3129
- High quality chromium-vanadium steel forging, hardening heat treatment with tip holes
- Surface electrophoretic anti-rust treatment, high torque, strong and durable
- It can be used as manual and pneumatic

	Item NO.	Size		⌀	RMB
6PT	CL201408	8mm	20/400	0.10	
	CL201409	9mm	20/400	0.10	
	CL201410	10mm	20/200	0.12	
	CL201411	11mm	20/200	0.11	
	CL201412	12mm	20/200	0.14	
	CL201413	13mm	20/200	0.15	
	CL201414	14mm	20/200	0.15	
	CL201415	15mm	20/200	0.16	
	CL201416	16mm	20/200	0.15	
	CL201417	17mm	15/150	0.18	
	CL201418	18mm	14/140	0.22	
	CL201419	19mm	14/140	0.21	
	CL201420	20mm	12/120	0.25	
	CL201421	21mm	12/120	0.24	
	CL201422	22mm	11/110	0.23	
	CL201423	23mm	9/90	0.29	
	CL201424	24mm	8/80	0.28	
	CL201427	27mm	6/60	0.31	
	CL201430	30mm	6/60	0.43	
	CL201432	32mm	6/60	0.45	
12PT	CL201434	34mm	4/40	0.56	
	CL201436	36mm	4/40	0.61	
	CL201401	34mm	4/40	0.56	
	CL201402	36mm	4/40	0.61	

1/2" (Electrophoresis) 6pt Socket



- Meet the manufacturing requirements of DIN 3129
- Made of chrome-molybdenum steel, sandblasted phosphating anti-rust and hardening treatment
- High torque, good hardness, long service life

Item NO.	Size		Weight	RMB
CL205608	8mm	12/216	0.07	
CL205609	9mm	12/216	0.07	
CL205610	10mm	12/216	0.07	
CL205611	11mm	12/216	0.07	
CL205612	12mm	12/216	0.07	
CL205613	13mm	12/216	0.07	
CL205614	14mm	12/216	0.08	
CL205615	15mm	12/216	0.08	
CL205616	16mm	12/216	0.08	
CL205617	17mm	12/216	0.12	
CL205618	18mm	12/216	0.12	
CL205619	19mm	12/216	0.11	
CL205620	20mm	12/216	0.12	
CL205621	21mm	12/216	0.11	
CL205622	22mm	9/162	0.12	
CL205623	23mm	9/162	0.11	
CL205624	24mm	9/162	0.13	
CL205627	27mm	6/108	0.15	
CL205630	30mm	5/90	0.14	
CL205632	32mm	5/90	0.17	

1/2" Deep Air Impact 6pt (Electrophoresis) Socket



- Meet the manufacturing requirements of DIN 3129
- Made of chrome-molybdenum steel, sandblasted phosphating anti-rust and hardening treatment
- High torque, good hardness, long service life

Item NO.	Size		Weight	RMB
CL205708	8mm	12/144	0.20	
CL205709	9mm	12/144	0.23	
CL205710	10mm	12/144	0.11	
CL205711	11mm	12/144	0.12	
CL205712	12mm	12/144	0.13	
CL205713	13mm	12/144	0.14	
CL205714	14mm	12/144	0.15	
CL205715	15mm	12/144	0.16	
CL205716	16mm	12/144	0.16	
CL205717	17mm	12/144	0.23	
CL205718	18mm	12/144	0.23	
CL205719	19mm	12/144	0.23	
CL205720	20mm	12/144	0.24	
CL205721	21mm	12/144	0.24	
CL205722	22mm	9/108	0.27	
CL205723	23mm	9/108	0.29	
CL205724	24mm	9/108	0.27	
CL205727	27mm	6/72	0.32	
CL205730	30mm	5/60	0.40	
CL205732	32mm	5/60	0.44	



1/2" Electrophoresis Air Impact Socket



- Meet ISO 2725 DIN 3124 manufacturing requirements
- High quality chromium-vanadium steel forging, thin wall design, electroplated bright chromium is not easy to rust
- High torque, middle knurling design
- Note: Manual socket is not suitable for pneumatic tools

Item NO.	Size	1/2"	3/4"	RMB
CL204308	5/16"	24		
CL204309	11/32"	24		
CL204310	3/8"	24		
CL204311	7/16"	24		
CL204312	15/32"	24		
CL204313	1/2"	24		
CL204314	9/16"	24		
CL204315	19/32"	24		
CL204316	5/8"	20		
CL204317	11/16"	20		
CL204319	3/4"	15		
CL204320	25/32"	14		
CL204321	13/16"	12		
CL204322	7/8"	12		
CL204324	15/16"	11		
CL204325	1"	8		
CL204327	1-1/16"	8		
CL204328	1-1/8"	6		
CL204330	1-3/16"	6		
CL204332	1-1/4"	6		

1/2" Mirror Finish "E" Type Socket



Item NO.	Size	1/2"	3/4"	RMB
CL200808	E8	24/480	0.05	
CL200810	E10	24/480	0.05	
CL200811	E11	24/480	0.06	
CL200812	E12	24/480		
CL200814	E14	24/480		
CL200816	E16	24/480		
CL200818	E18	24/480		
CL200820	E20	20/400		
CL200822	E22	15/300		
CL200824	E24	12/240	0.10	

- Meet DIN TORX standard manufacturing requirements
- High quality chromium-vanadium steel forging, thin wall TORX plating bright chromium is not easy to rust
- High torque, middle knurled non-slip design
- It is often used for disassembly and installation of automobile engines
- Note: Manual socket is not suitable for pneumatic tools


1/2" Mirror Finish Gear 6pt Socket



Item NO.	Size	1/2"	3/4"	RMB
CL205408	8mm	24/480	0.05	
CL205409	9mm	24/480	0.05	
CL205410	10mm	24/480	0.05	
CL205411	11mm	24/480	0.05	
CL205412	12mm	24/480	0.05	
CL205413	13mm	24/480	0.05	
CL205414	14mm	24/480	0.05	
CL205415	15mm	24/480	0.05	
CL205416	16mm	20/400	0.04	
CL205417	17mm	20/400	0.06	
CL205418	18mm	15/300	0.07	
CL205419	19mm	15/300	0.07	
CL205420	20mm	14/280	0.07	
CL205421	21mm	12/240	0.09	
CL205422	22mm	12/240	0.08	
CL205423	23mm	11/220	0.11	
CL205424	24mm	11/220	0.13	
CL205427	27mm	8/160	0.14	
CL205430	30mm	6/120	0.18	
CL205432	32mm	6/120	0.20	

- Meet ISO 2725 DIN 3124 manufacturing requirements
- High quality chrome-vanadium steel forging, inner wall design of tooth socket, plating bright chromium
- High torque, high hardness, middle knurling design
- Multiple specifications can be used, please refer to the appendix of the catalogue for detailed dimensions
- Note: Manual socket is not suitable for pneumatic tools

- >> 3/4" & 1" Mirror Finish 6pt Knurling Heavy Socket
- >> 3/4" & 1" Mat Finish 6pt Heavy Socket
- >> 3/4" & 1" Mat Finish 12pt Heavy Socket
- >> 3/4" & 1" Electrophoresis 6pt Heavy Socket
- >> 3/4" & 1" Impact Socket



Size	L(mm)	W(mm)	ØQ(mm)	ØH(mm)
17mm	50	22	37	30
18mm	50	22	37	30
19mm	52	22	37	33
21mm	52	22	37	34
22mm	52	22	37	35
23mm	52	22	37	36
24mm	52	22	37	37
26mm	52	22	39	39
27mm	52	22	38	40
28mm	52	22	38	41
29mm	52	22	38	42
30mm	52	24	38	43
31mm	52	24	38	44
32mm	52	24	40	46
33mm	52	24	40	47
34mm	52	24	40	48
36mm	57	27	43	52
38mm	57	27	43	54
41mm	60	30	45	58
42mm	60	30	45	59
45mm	65	30	45	62
46mm	65	30	45	64
48mm	67	33	47	67
50mm	69	33	47	69
55mm	70	33	55	75
60mm	75	35	55	82
65mm	80	40	55	87
70mm	85	30	60	93
75mm	90	40	60	99
80mm	95	45	63	110
85mm	100	48	70	113
90mm	90	40	70	120
95mm	110	60	72	130
100mm	100	45	74	130
105mm	105	50	74	110

3/4" & 1" Mirror Finish 6pt Heavy Socket



TYPE	Item NO.	Size			RMB
3/4"	CL203919	19mm	12/96		
	CL203921	21mm	12/96		
	CL203922	22mm	12/96		
	CL203923	23mm	12/96		
	CL203924	24mm	12/96		
	CL203926	26mm	10/80		
	CL203927	27mm	10/80		
	CL203929	29mm	8/64		
	CL203930	30mm	7/56		
	CL203932	32mm	6/48		
	CL203933	33mm	6/48		
	CL203934	34mm	6/48		
	CL203936	36mm	5/40		
	CL203938	38mm	5/40		
	CL203941	41mm	4/32		
	CL203946	46mm	4/32		
	CL203950	50mm	4/32		
1"	CL203955	55mm	4/24		
	CL203960	60mm	4/24		
	CL203965	65mm	4/24		

- Meet ISO 2725 DIN 3124 manufacturing requirements
- High quality chromium-vanadium steel forging, thickening design, electroplating bright chromium is not easy to rust
- High torque, high hardness, middle knurling design
- Note: Manual socket is not suitable for pneumatic tools



VDE
绝缘



3/4"&1" Mat Finish 6pt Heavy Socket



TYPE	Item NO.	Size	12/96	8/64	RMB
3/4"	CL201717	17mm	12/96		
	CL201718	18mm	12/96		
	CL201719	19mm	12/96		
	CL201721	21mm	12/96		
	CL201722	22mm	12/96		
	CL201723	23mm	12/96		
	CL201724	24mm	12/96		
	CL201726	26mm	10/80		
	CL201727	27mm	10/80		
	CL201728	28mm	8/64		
	CL201729	29mm	8/64		
	CL201730	30mm	7/56		
	CL201731	31mm	7/56		
	CL201732	32mm	6/48		
	CL201733	33mm	6/48		
	CL201734	34mm	6/48		
	CL201735	35mm	5/40		
	CL201736	36mm	5/40		
	CL201738	38mm	5/40		
	CL201740	40mm	4/32		
	CL201741	41mm	4/32		
	CL201742	42mm	4/32		
	CL201745	45mm	4/32		
	CL201746	46mm	4/32		
	CL201748	48mm	4/32		
	CL201750	50mm	4/32		
	CL201755	55mm	4/24		
1"	CL201755B	55mm	4/24		
	CL201758	58mm	4/24		
	CL201760	60mm	4/24		
	CL201765	65mm	4/24		
	CL201770	70mm	12		
	CL201775	75mm	10		
	CL201780	80mm	8		
	CL201785	85mm	1		
	CL201790	90mm	1		
	CL201795	95mm	1		
	CL201700	100mm	1		
	CL201705	105mm	1		
	CL201710	110mm	1		
	CL201712	120mm	1		
	CL201713	130mm	1		

- Meet ISO 2725 DIN 3124 manufacturing requirements
- Forged high quality chromium-vanadium steel, thickened 6 Angle design
- High torque, high hardness, surface hardening and sandblasting
- Note: Manual socket is not suitable for pneumatic tools

3/4"&1" Mat Finish 12pt Heavy Socket



TYPE	Item NO.	Size	12/96	8/64	RMB
3/4"	CL201817	17mm	12/96		
	CL201818	18mm	12/96		
	CL201819	19mm	12/96		
	CL201821	21mm	12/96		
	CL201822	22mm	12/96		
	CL201823	23mm	12/96		
	CL201824	24mm	12/96		
	CL201826	26mm	10/80		
	CL201827	27mm	10/80		
	CL201828	28mm	8/64		
	CL201829	29mm	8/64		
	CL201830	30mm	7/56		
	CL201831	31mm	7/56		
	CL201832	32mm	6/48		
	CL201833	33mm	6/48		
	CL201834	34mm	6/48		
	CL201836	36mm	5/40		
	CL201838	38mm	5/40		
	CL201841	41mm	4/32		
	CL201842	42mm	4/32		
1"	CL201846	46mm	4/32		
	CL201848	48mm	4/32		
	CL201850	50mm	4/32		
	CL201855	55mm	4/24		
	CL201860	60mm	4/24		
	CL201865	65mm	4/24		

- Meet ISO 2725 DIN 3124 manufacturing requirements
- Forged high-quality chromium-vanadium steel, thickened 12 Angle design
- High torque, high hardness, surface hardening and sandblasting
- Note: Manual socket is not suitable for pneumatic tools

3/4"&1" Electrophoresis 6pt Heavy Socket



TYPE	Item NO.	Size			RMB
3/4"	CL201917	17mm	12/96		
	CL201918	18mm	12/96		
	CL201919	19mm	12/96		
	CL201921	21mm	12/96		
	CL201922	22mm	12/96		
	CL201923	23mm	12/96		
	CL201924	24mm	12/96		
	CL201926	26mm	10/80		
	CL201927	27mm	10/80		
	CL201928	28mm	8/64		
	CL201929	29mm	8/64		
	CL201930	30mm	7/56		
	CL201931	31mm	7/56		
	CL201932	32mm	6/48		
	CL201933	33mm	6/48		
	CL201934	34mm	6/48		
	CL201936	36mm	5/40		
	CL201938	38mm	5/40		
	CL201941	41mm	4/32		
	CL201942	42mm	4/32		
1"	CL201946	46mm	4/32		
	CL201948	48mm	4/32		
	CL201950	50mm	4/32		
	CL201955	55mm	4/24		
	CL201960	60mm	4/24		
	CL201965	65mm	4/24		

- Meet ISO 2725 DIN 3124 manufacturing requirements
- Forged high quality chromium-vanadium steel, thickened 6 Angle design
- High torque, high hardness, electrophoretic surface
- Note: Manual socket is not suitable for pneumatic tools

3/4"&1" Impact Socket



TYPE	Item NO.	Size	L(mm)	W(mm)	ØQ(mm)	ØH(mm)			RMB
3/4"	CL202117	17mm	50	21	32	41	8/64		
	CL202119	19mm	52	21	33	41	10/80		
	CL202121	21mm	52	26	38	43	10/80		
	CL202122	22mm	52	25	39	43	10/80		
	CL202123	23mm	52	24	40	43	10/80		
	CL202124	24mm	52	23	39	39	10/80		
	CL202126	26mm	52	22	43	43	7/56		
	CL202127	27mm	52	27	44	38	7/56		
	CL202128	28mm	52	30	45	45	8/64		
	CL202129	29mm	52	30	47	44	6/48		
	CL202130	30mm	52	25	48	44	7/56		
	CL202131	31mm	52	29	50	44	6/48		
	CL202132	32mm	52	27	50	44	6/48		
	CL202133	33mm	56	26	51	45	5/40		
	CL202134	34mm	56	28	53	45	5/40		
	CL202135	35mm	56	29	54	44	5/40		
	CL202136	36mm	56	30	54	44	5/40		
	CL202138	38mm	56	36	58	44	4/32		
	CL202141	41mm	62	33	62	47	4/32		
	CL202146	46mm	63	33	68	47	4/32		
1"	CL202148	48mm	68	35	67	47	4/32		
	CL202150	50mm	72	37	73	48	4/32		
	CL202155	55mm	74	38	75	56	4/24		

- Meet the manufacturing requirements of DIN 3129
- High quality chromium-vanadium steel forging, thickening design, phosphating and rust prevention surface
- High torque, high hardness, long service life
- Pneumatic socket can be used for both manual and pneumatic operation



VDE
绝缘




3/4" Deep Impact Electrophoresis Socket



Item NO.	Size	L(mm)	W(mm)	ØQ(mm)	ØH(mm)	Ø	Ø	RMB
CL202217	17mm	90	40	31	40	42		
CL202219	19mm	90	40	33	40	36		
CL202221	21mm	90	29	36	39	36		
CL202222	22mm	90	24	38	41	36		
CL202224	24mm	90	37	40	40	36		
CL202226	26mm	90	36	47	42	36		
CL202227	27mm	90	45	44	44	36		
CL202228	28mm	90	51	43	37	36		
CL202229	29mm	90	41	43	37	36		
CL202230	30mm	90	48	48	37	36		
CL202232	32mm	90	47	48	44	36		
CL202233	33mm	90	41	49	45	36		
CL202234	34mm	90	33	48	42	36		
CL202236	36mm	90	45	55	45	36		
CL202238	38mm	90	42	57	46	30		
CL202241	41mm	90	42	60	46	30		
CL202246	46mm	90	45	64	44	30		

- High quality chromium-vanadium steel forging, hardening heat treatment with tip holes
- Surface electrophoretic anti-rust treatment, high torque, and lengthening
- Pneumatic socket can be used for both manual and pneumatic operation


1" Phosphating pneumatic Socket



Item NO.	Size	L(mm)	W(mm)	D1(mm)	D2(mm)	Ø	Ø	RMB
CL203821	21mm (四方)	88	37	40	54	6/24		
CL203822	22mm (四方)	88	37	44	54	6/24		
CL203824	24mm	88	37	44	54	6/24		
CL203827	27mm	88	37	47	54	6/24		
CL203830	30mm	88	37	51	54	6/24		
CL203832	32mm	88	37	53	53	6/24		
CL203833	33mm	88	37	54	54	6/24		
CL203834	34mm	88	37	54	54	6/24		
CL203836	36mm	88	37	57	54	6/24		
CL203838	38mm	88	40	59	54	6/24		
CL203841	41mm	88	40	63	54	6/24		

- High quality chromium-vanadium steel forging, hardening heat treatment with tip holes
- Surface electrophoretic anti-rust treatment, high torque
- Pneumatic socket can be used for both manual and pneumatic operation

1" Electrophoresis Impact Socket



Item NO.	Size	L(mm)	W(mm)	D1(mm)	D2(mm)	Ø	Ø	RMB
CL202317	17mm(四方)	80	37	34	54	42		
CL2023176	17mm(六方)	80	37	37	54	42		
CL202319	19mm(四方)	80	37	37	54	42		
CL2023196	19mm(六方)	80	37	39	54	42		
CL202321	21mm(六方)	80	37	39	54	42		
CL2023214	21mm(四方)	80	37	40	54	42		
CL202322	22mm(六方)	80	37	40	54	42		
CL2023224	22mm(四方)	80	37	44	54	42		
CL202324	24mm	80	37	44	54	42		
CL202326	26mm	80	37	47	54	42		
CL202327	27mm	80	37	47	54	42		
CL202328	28mm	80	37	48	54	36		
CL202329	29mm	80	37	49	54	36		
CL202330	30mm	80	37	51	54	36		
CL202332	32mm	80	37	53	53	36		
CL202333	33mm	80	37	54	54	36		
CL202334	34mm	80	37	54	54	36		
CL202335	35mm	80	37	55	54	36		
CL202336	36mm	80	37	57	54	36		
CL202338	38mm	80	40	59	54	30		
CL202341	41mm	80	40	63	54	30		
CL202342	42mm	80	40	63	54	30		
CL202346	46mm	80	40	69	56	16		
CL202348	48mm	80	40	73	56	24		
CL202350	50mm	80	40	79	56	12		
CL202352	52mm	80	40	79	56	16		
CL202355	55mm	80	40	79	56	12		
CL202360	60mm	80	40	85	58	16		
CL202365	65mm	80	40	92	60	12		
CL202370	70mm					16		
CL202375	75mm					16		

- High quality chromium-molybdenum alloy steel forging, thickening design, surface manganese phosphate rust prevention
- High torque, high hardness, long service life
- Pneumatic socket can be used for both manual and pneumatic operation

1" Electrophoretic 6pt Deep pneumatic Socket



Item NO.	Size	🚗	📦	RMB
CL204224	24mm	1		
CL204227	27mm	1		
CL204230	30mm	1		
CL204232	32mm	1		
CL204233	33mm	1		
CL204234	34mm	1		
CL204236	36mm	1		
CL204238	38mm	1		
CL204241	41mm	1		
CL204246	46mm	1		
CL204250	50mm	1		
CL204255	55mm	1		

- High quality chromium-vanadium steel forging, hardening heat treatment with tip holes
- Surface electrophoretic anti-rust treatment, high torque, and lengthening
- Pneumatic socket can be used for both manual and pneumatic operation

1" Electrophoretic 6pt Deep pneumatic Socket



Item NO.	Size	🚗	📦	RMB
CL205524	24mm	1		
CL205527	27mm	1		
CL205530	30mm	1		
CL205532	32mm	1		
CL205533	33mm	1		
CL205534	34mm	1		
CL205536	36mm	1		
CL205538	38mm	1		
CL205541	41mm	1		
CL205546	46mm	1		
CL205550	50mm	1		
CL205555	55mm	1		

- Made of chromium-molybdenum alloy steel, sandblasted phosphating anti-rust and hardening treatment
- High torque, high hardness, long service life

3/4" 6pt Metric Pneumatic Socket



Item NO.	Size	🚗	📦	RMB
CL204617	17mm			
CL204619	19mm			
CL204621	21mm			
CL204622	22mm			
CL204624	24mm			
CL204627	27mm			
CL204630	30mm			
CL204632	32mm			

- High quality chromium-vanadium steel forging, hardening heat treatment with tip holes
- Surface electrophoretic anti-rust treatment, high torque, and lengthening
- Pneumatic socket can be used for both manual and pneumatic operation


1/2" Deep Industrial Class 6pt Impac Socket



Item NO.	Size	🚗	📦	RMB
CL204722	22mm(150mm)			

- Made of chromium-vanadium alloy steel, surface electrophoretic treatment
- High torque, high hardness, long service life





According to the use of driving device classification:

1. Pneumatic socket (also known as impact socket)
2. Manual socket

According to the material classification:

1. **Chrome-Molybdenum Steel** is chromium, Mo and iron. Carbon (C) alloy, high temperature processing performance, beautiful after processing, deep quenching, good impact absorption performance, Therefore, it is commonly used in the industry to make pneumatic tools and large hand tools.
2. **Chrome-Vanadium Steel**. Chrome-vanadium steel is an alloy tool steel with chrome-vanadium alloy elements. It is mainly used in hand tools.
3. **45# carbon steel**, that is, 45 steel, carbon content of about 0.45%, due to good processing performance and multi-directional processing workers

Art has become the most commonly used processing materials in steel.

The above materials Cr-Mo(chromium molybdenum steel) material is the best, is the best material of socket.

Purpose of the socket:

The socket is also called a socket wrench. It is mainly used in combination with pneumatic wrench, manual wrench and hydraulic wrench to tighten or loosen screws or nuts. It is widely used in automobile maintenance, electric power, mining and other machine repair and detection and assembly. Changlu socket sales in the forefront.

Full Polished Extension Bar



TYPE	Item NO.	Size	L(mm)	H(mm)	Quantity (card insert)	Weight (kg)	RMB
1/4"	CL300802	2"(50mm)	50	8	6	0.03	
	CL300803	3"(75mm)	75	8	6	0.04	
	CL300804	4"(100mm)	100	8	3	0.05	
	CL300806	6"(150mm)	150	8	3	0.07	
3/8"	CL300603	3"(75mm)	75	12	6	0.07	
	CL300606	6"(150mm)	150	12	3	0.14	
	CL300610	10"(250mm)	250	12	3	0.23	
1/2"	CL300403	3"(75mm)	75	16	24/200	0.12	
	CL300405	5"(125mm)	125	16	10/120	0.19	
	CL300410	10"(250mm)	250	16	10/60	0.39	
	CL300418	18"(450mm)	450	16	30	0.71	
	CL300420	20"(500mm)	500	16	30	0.78	
	CL300424	24"(600mm)	600	16	20	0.93	
3/4"	CL300430	30"(750mm)	750	16	20	1.14	
	CL300709	4"(100mm)	100	25	50	0.40	
	CL300703	8"(200mm)	200	25	25	0.82	
	CL300707	16"(400mm)	400	25	10	1.27	

- Made of chrome-vanadium steel forging, polished chrome-plated mirror anti-rust treatment
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance
- Anti-skid knurling design in the middle, used as standard connecting rod after insertion

Mat Finish Extension Bar



TYPE	Item NO.	Size	L(mm)	H(mm)	Weight (kg)	RMB
1/2"	CL300105	5"(125mm)	125	16	120	0.22
	CL300110	10"(250mm)	250	16	60	0.40
3/4"	CL300701	4"(100mm)	100	22.5	70	0.38
	CL300702	8"(200mm)无孔	200	22.5	30	0.66
	CL300706	16"(400mm)	400	22.5	16	1.28

- It is forged with chrome-vanadium steel, and its surface is sandblasted and anti-rust treated
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance
- Anti-skid knurling design, used as standard connecting rod after insertion

1/2" Impact Electrophoresis Extension Bar



Item NO.	Size	L(mm)	ØD(mm)	H(mm)	Weight (kg)	RMB
CL300303	3"(75mm)	75	22.5	16	24/200	0.14
CL300305	5"(125mm)	125	22.5	16	10/120	
CL300310	10"(250mm)	250	22.5	16	10/60	0.39
CL300320	20"(500mm)	500	22.5	16	40	0.83

- It is forged with chrome-vanadium steel and its surface is treated with electrophoretic antirust
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance
- Anti-skid knurling design in the middle, used as standard connecting rod after insertion

3/4" Full Polished Extension Bar



Item NO.	Size	L(mm)	ØD(mm)	H(mm)	Weight (kg)	RMB
CL300710	8"(200mm)	200	36	25	25	0.82

- Made of chrome-vanadium steel forging, polished chrome-plated mirror anti-rust treatment
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance
- Anti-skid knurling design in the middle, used as standard connecting rod after insertion

3/4" Mat Finish Extension Bar



Item NO.	Size	L(mm)	ØD(mm)	H(mm)	Weight (kg)	RMB
CL300705	8"(200mm)	200	37	22.5	50	0.69

- It is forged with chrome-vanadium steel, and its surface is sandblasted and anti-rust treated
- Used for fitting socket removal, fastening bolts and nuts, and vehicle and equipment maintenance




3/4" Electrophoresis Extension Bar



Item NO.	Size	Weight (g)	Weight (lb)	RMB
CL300713	4"(100mm)	60	0.38	
CL300712	8"(200mm)(无孔)	50	0.68	
CL300704	8"(200mm)(穿孔)	30	0.72	

- It is forged with chrome-vanadium steel and its surface is treated with electrophoretic antirust
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance


1/2" Full Polished Shaking Bar



Item NO.	Size	L(mm)	W(mm)	H(mm)	Weight (g)	Weight (lb)	RMB
CL300505	5"(125mm)	125	22.5	16	100	0.22	
CL300510	10"(250mm)	250	22.5	16	50	0.38	

- Made of chrome-vanadium steel forging, polished chrome-plated mirror anti-rust treatment
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance.
- The square tenon can be sloped up to 20 degrees, and the knurled design is non-slip.


1" Impact Electrophoresis Extension Bar



Item NO.	Size	L(mm)	W(mm)	H(mm)	Weight (g)	Weight (lb)	RMB
CL300708	8"(200mm)	200	53	33	15	1.44	

- It is forged with chrome-vanadium steel and its surface is treated with electrophoretic antirust
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance
- Used as standard connecting rod after insertion

Mat Finish Bent Bar



Item NO.	Size	L(mm)	W(mm)	H(mm)	Weight (g)	Weight (lb)	RMB
CL300901	10"(250mm)	250	70	16	50	0.45	

- It is forged with chrome-vanadium steel, and its surface is sandblasted and anti-rust treated
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance
- Used with the socket, steel ball locking device is installed on both ends of the mortise


1/2" Full Polished Extension Bar



Item NO.	Size	Weight (g)	Weight (lb)	RMB
CL300433	3件套	6		

- Made of chrome-vanadium steel forging, polished chrome-plated mirror anti-rust treatment
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance
- Anti-skid knurling design in the middle, used as standard connecting rod after insertion

Full Polished Bent Bar



TYPE	Item NO.	Size	L(mm)	W(mm)	H(mm)	Weight (g)	Weight (lb)	RMB
1/4"	CL301906	6"(150mm)					0.07	
3/8"	CL301301	10"(250mm)	250	70	16	12/48	0.29	
	CL300910	10"(250mm)	250	70	16	12/48	0.44	
1/2"	CL300912	12"(300mm)	300	70	16	45	0.54	
	CL300915	15"(375mm)	375	70	16	40	0.65	
3/4"	CL301202	16"(400mm)	400	90	25	10	1.75	

- Made of chrome-vanadium steel forging, polished chrome-plated mirror anti-rust treatment
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance
- Used with the socket, steel ball locking device is installed on both ends of the mortise

3/4" Mat Finish Heavy Bent Bar



Item NO.	Size	L(mm)	W(mm)	SD(mm)	Weight	RMB
CL301101	4"(100mm)	100	100	24	50	
CL301201	16"(400mm)	400	100	24	15	1.63

- It is forged with chrome-vanadium steel, and its surface is sandblasted and anti-rust treated
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance
- Used with the socket, steel ball locking device is installed on both ends of the mortise

3/4" Heavy Duty Bent Bar



Item NO.	Size	Weight	RMB
CL301204	16"(400mm)	12	1.74

- It is forged with chrome-vanadium steel, and its surface is polished with mirror chrome-plated and anti-rust treatment
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance
- Used with socket, steel ball locking device on tenon, and knurling design for handle


3/4" Electrophoresis Heavy Bent Bar



Item NO.	Size	L(mm)	W(mm)	SD(mm)	Weight	RMB
CL301203	16"(400mm)	400	90	25	15	1.62

- It is forged with chrome-vanadium steel and its surface is treated with electrophoretic antirust
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance.
- Used with the socket, steel ball locking device is installed on both ends of the mortise


1/2" Rubber Handle Bent Bar



Item NO.	Size	L(mm)	A(mm)	Weight	RMB
CL301012	12"(300mm)	30	300	70	0.65

- Made of chromium-vanadium steel with chromium-plated anti-rust treatment;
- TPR plastic handle prevents hand slipping and is used with socket
- It is used to remove the screw tire bolts of the automobile and belongs to the on-board tool
- Steel ball locking socket function is provided on the tenon

1" Impact Bent Bar (40cr)



Item NO.	Size	L(mm)	W(mm)	SD(mm)	Weight	RMB
CL301416	16"(400mm)	400	200	30	8	3.88

- Forged with 40Cr, high torque, good hardness and toughness
- Used for removing and fastening heavy screws and nuts and maintenance of vehicles and equipment
- Used for fast disassembly and installation of nuts, and can turn quickly

1/2" Electroplated Shaking Handle




Item NO.	Size	L(mm)	SD1(mm)	SD2(mm)	Weight	RMB
CL302204	20"(500mm)	500	18	12.5	50	

- Made of forged high carbon steel with surface electrophoretic anti-rust treatment
- Used for fitting socket removal, fastening bolts and nuts, and vehicle and equipment maintenance
- Human mechanics design, using the bow shank to quickly and continuously rotate the fastening screw



1/2" Combination Extension Bar

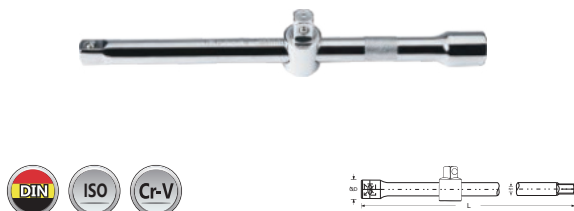

Item NO.	Size	L(mm)	ØD(mm)	ØH(mm)	Weight(g)	Weight(lb)	RMB
----------	------	-------	--------	--------	-----------	------------	-----

- Made of chrome-vanadium steel forging, polished chrome-plated mirror anti-rust treatment
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance.
- Can be used as a extension bar or T slide bar

1/2" Sliding Bar



Item NO.	Size	L(mm)	A(mm)	Weight(g)	Weight(lb)	RMB
----------	------	-------	-------	-----------	------------	-----

- It is forged with chromium-vanadium steel, and the surface of the conversion sliding joint is black and rust resistant
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance.
- The two ends of the connecting rod are equipped with locking steel balls to prevent the mortise from falling off
- Can be used as a extension bar or T slide bar

Full Polished Sliding Bar



TYPE	Item NO.	Size	L(mm)	Weight(g)	Weight(lb)	RMB
------	----------	------	-------	-----------	------------	-----

- It is forged with chrome-vanadium steel, and its surface is polished with chrome-plated anti-rust treatment
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance.
- The two ends of the connecting rod are equipped with locking steel balls to prevent the mortise from falling off
- Can be used as a extension bar or T slide bar


3/4" Electrophoresis Sliding Bar



Item NO.	Size	L(mm)	A(mm)	Weight(g)	Weight(lb)	RMB
----------	------	-------	-------	-----------	------------	-----

- It is forged with chrome-vanadium steel and its surface is treated with electrophoretic antirust
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance
- The two ends of the connecting rod are equipped with locking steel balls to prevent the mortise from falling off
- Can be used as a extension bar or T slide bar


Mat Finish Sliding Bar

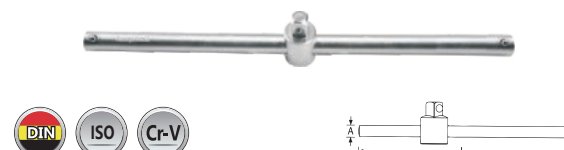

TYPE	Item NO.	Size	L(mm)	A(mm)	Weight(g)	Weight(lb)	RMB
------	----------	------	-------	-------	-----------	------------	-----

- It is forged with chrome-vanadium steel, and its surface is polished with chrome-plated anti-rust treatment
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance.
- The two ends of the connecting rod are equipped with locking steel balls to prevent the mortise from falling off
- Can be used as a extension bar or T slide bar

3/4" Adding Force Bar

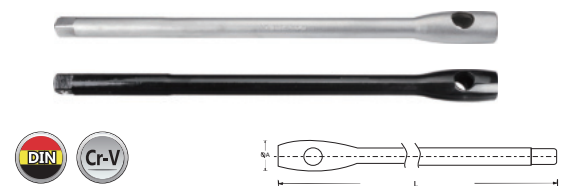

TYPE	Item NO.	Size	L(mm)	A(mm)	Weight(g)	Weight(lb)	RMB
------	----------	------	-------	-------	-----------	------------	-----

- It is forged with chrome-vanadium steel and its surface is treated with anti-rust
- Used for fitting socket removal, fastening screw, nut and vehicle and equipment maintenance

Full Polished "F" Bar



TYPE	Item NO.	Size	L(mm)	A(mm)	ØB(mm)	Weight	Volume	RMB
1/2"	CL302010	10"(250mm)	250	28	20	40	0.52	
	CL302015	15"(375mm)	375	29	20	30	0.72	
	CL302018	18"(450mm)	450	32	17	20	0.87	
3/4"	CL302020	20"(500mm)	500	42	24	20	1.87	

- Made of chrome-vanadium steel, handle knurled anti-slip design, high torque standard, with ball lock
- Used with the socket, for removing and fastening heavy screws, nuts and maintenance of vehicles and equipment


1/4" Square Extension Bar



Item NO.	Size	Weight	Volume	RMB
CL300801	1/4"	255	0.09	

- The square rod is forged with chrome-vanadium steel, hardened by heat treatment, and chrome-plated to prevent rust
- Used for connecting 1/4" square rod and socket, used for general small torque fastening bolts


Mirror Finish Quick Release Ratchet Wrench



Item NO.	Size	B(mm)	C(mm)	L(mm)	A(mm)	Weight	Volume	RMB
CL302701	1/2"	38	27	260	43	5/40	0.63	
CL302702	3/8"	31	16	210	33	8/40	0.32	
CL302703	1/4"	24	12	160	26	10/50	0.17	

- Made of high quality chrome-vanadium steel, with locking and quick release ratchet head functions
- The inner structure of ratchet has 72 teeth, and the bolts or nuts can be wrenched at a 5-degree rotation Angle
- The handle part of the wrench is designed according to human body function, with two-color injection molding, making it comfortable to hold and pinch
- With forward and reverse commutation mechanism, square tenon high torque output, more than 50% DIN

Mirror Finish Quick Release Ratchet Wrench (Bent Handle)



Item NO.	Size	B(mm)	C(mm)	L(mm)	A(mm)	Weight	Volume	RMB
CL305601	1/2"	41	21	260	41	5/25	0.61	
CL305602	3/8"	33	17	218	33	8/40	0.33	
CL305603	1/4"	25	13	160	28	10/50	0.18	

- Made of high quality chrome-vanadium steel, with locking and quick release ratchet head functions
- The handle part of the wrench is designed according to human body function, with two-color injection molding, making it comfortable to hold and pinch
- With forward and reverse reversing mechanism, high torque output of square rod, exceeding 50% ANSI




Full Polished Double Oval Type Ratchet Handle



Item NO.	Size	Weight (kg)	Weight (lb)	RMB
CL302711	1/2"		0.63	

- Made of high quality chrome-vanadium steel, with locking and quick release ratchet head functions
- The ratchet internal dial adopts the horn principle, which has the characteristics of long service life
- The handle part of the wrench is designed according to human body function, with two-color injection molding, making it comfortable to hold and pinch
- With forward and reverse commutation mechanism, square tenon high torque output, more than 50% DIN

Full Polished Ratchet Handle



Item NO.	Size	B(mm)	C(mm)	L(mm)	A(mm)	Weight (kg)	Weight (lb)	RMB
CL303001	1/2"	39	20	260	39	6/36	0.49	
CL303002	3/8"	37	17	210	36	6/48	0.31	
CL303003	1/4"	28	14	160	21	12/120	0.15	

- Made of high quality chrome-vanadium steel, mirror polished chrome plated, 36-tooth ratchet inner mechanism
- With forward and reverse reversing mechanism, high torque output of square tenon, used with socket
- Plastic handle, comfortable to feel, designed according to human body function


1/2" Mirror Retractable Ratchet Wrench



Item NO.	Size	Weight (kg)	Weight (lb)	RMB
CL305701	1/2"	1/20	1.00	

- This product is made of high-quality chromium-vanadium steel with 72-tooth ratchet and 1 tooth with 5 degrees rotation
- The adjustable length is 140mm, and the adjustable section is divided into 5 sections, each 27mm long
- The handle part of the wrench is designed according to human body function, with two-color injection molding, making it comfortable to hold and pinch
- With forward and reverse commutation mechanism, square tenon high torque output, more than 50% DIN


Mirror embossed handle ratchet wrench



Item NO.	Size	B(mm)	C(mm)	L(mm)	A(mm)	Weight (kg)	Weight (lb)	RMB
CL303201	1/2"	38	20	250	41	8/48	0.52	

- Made of high quality chromium-vanadium steel, mirror polished chrome plated
- With forward and reverse reversing mechanism, high torque output of square tenon
- Embossed handle to prevent slipping, designed according to human body function


Mirror Short Handle Quick Release Ratchet Wrench



Item NO.	Size	B(mm)	C(mm)	L(mm)	A(mm)	Weight (kg)	Weight (lb)	RMB
CL302821	1/2"	40	21	200	42	6/36	0.52	

- Made of high quality chrome-vanadium steel, with quick release ratchet head function
- The handle part of the wrench is designed according to human body function, with two-color injection molding, making it comfortable to hold and pinch
- With forward and reverse commutation mechanism, square tenon high torque output, more than 50% DIN
- This section is designed with short handle, suitable for working in narrow space. 72-tooth ratchet is used to save labor


Spiky Trail Ratchet Handle



Item NO.	Size	A(mm)	B(mm)	W(mm)	H(mm)	Weight (kg)	Weight (lb)	RMB
CL304000	14X17	360	20	52	55	2/40	0.51	
CL304001	17X19	360	20	52	55	2/40	0.45	
CL304003	19X22	360	20	52	55	2/40	0.75	
CL304005	22X24	360	20	52	55	2/32	0.71	
CL304006	24X27	360	20	52	55	2/32	0.49	

- Made of high quality chromium-vanadium steel, with phosphating anti-rust treatment
- With forward and reverse two-way switching ratchet function, applied to bridge construction
- Building template fastening bolts and nuts, the tip end is used as a crowbar
- Unique industrial strong torque design for heavy duty operations

Full Polished Spiky Trail Ratchet Handle



Item NO.	Size	A(mm)	B(mm)	W(mm)	H(mm)	10/40	10/40	RMB
CL304007	19X22	310	18	43	50			

- Made of high quality chrome-vanadium steel, with polished chrome-plated anti-rust treatment
- With forward and reverse two-way switching ratchet function, applied to bridge construction
- Building template fastening bolts and nuts, the tip end can be used as a crowbar

3/4" Mirror Retractable Ratchet Wrench




可伸缩

Item NO.	Size	10/40	10/40	RMB
CL305702	3/4"		3.49	

- This product is made of high-quality chromium-vanadium steel
- Adjustable length, adjustable section is divided into 5 sections
- The handle part of the wrench is designed according to human body function, making it comfortable to hold and pinch
- With forward and reverse commutation mechanism, square tenon high torque output, more than 50% DIN

3/4" Full Polished /mat Finish Heavy Ratchet Handle



Item NO.	Size	B(mm)	C(mm)	L(mm)	A(mm)	10/40	10/40	RMB
CL303719	Mirror finish	58	26	490	70	12	2.03	
CL303720	Matte finish	58	26	490	70	10	2.11	

- Made of high quality chromium-vanadium steel, mirror polished chrome plated
- With forward and reverse reversing mechanism, high torque output of square tenon
- Embossed handle to prevent slipping, designed according to human body function

1" Mirror Ratchet Wrench



Item NO.	Size	10/40	10/40	RMB
CL303931	1"			

- Made of high quality chromium-vanadium steel, mirror polished chrome plated
- With forward and reverse reversing mechanism, high torque output of square tenon
- Embossed handle to prevent slipping, designed according to human body function


3/4" Series Mirror Quick Release Ratchet Wrench (Solid Bar)



Item NO.	Size	10/40	10/40	RMB
CL303921	3/4"	6		

- Taiwan chromo material cold heading forming, mirror polished chrome plating
- With forward and reverse reversing mechanism, high torque output of square tenon
- 24-tooth ratchet head, integral heat treatment, beautiful and durable
- Applied to heavy vehicle and machinery maintenance

3/4" Heavy Ratchet Head




Item NO.	Size	H(mm)	L(mm)	W(mm)	D(mm)	10/40	10/40	RMB
CL303904	MIRROR FINISH	48	150	63	37	25		

- Made of high quality chromium-vanadium steel, mirror polished chrome plated
- With forward and reverse reversing mechanism, high torque output of square tenon
- 24-tooth ratchet head, integral heat treatment, beautiful and durable
- Applied to heavy vehicle and machinery maintenance



3/4" Heavy Ratchet Head

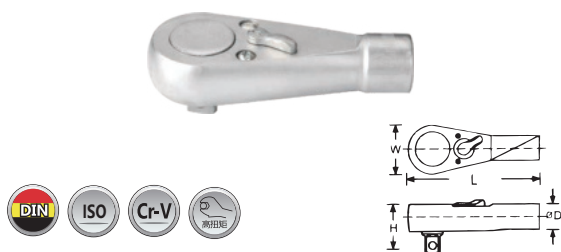

Item NO.	Size	H(mm)	L(mm)	W(mm)	D(mm)	Weight	Volume	RMB
----------	------	-------	-------	-------	-------	--------	--------	-----

- Made of high quality chrome-vanadium steel, sandblasted and anti-rust surface
- With forward and reverse reversing mechanism, high torque output of square tenon
- 24-tooth ratchet head, integral heat treatment, beautiful and durable

Universal Joint



Item NO.	Size	L(mm)	Q(mm)	Weight	Volume	RMB
----------	------	-------	-------	--------	--------	-----

- Forged with 50BV30 high-quality chromium-vanadium steel, capable of 180 degree direction conversion

3/4" Heavy Ratchet Head



Item NO.	Size	H(mm)	L(mm)	W(mm)	D(mm)	Weight	Volume	RMB
----------	------	-------	-------	-------	-------	--------	--------	-----

- Made of high-quality chromium-vanadium steel, with blackened surface and anti-rust treatment
- With forward and reverse reversing mechanism, high torque output of square tenon
- 24-tooth ratchet head, integral heat treatment, beautiful and durable
- Applied to heavy vehicle and machinery maintenance

3/4" Heavy Mirror Universal Joint



Item NO.	Size	Weight	Volume	RMB
----------	------	--------	--------	-----

- Made of high quality chromium-molybdenum alloy steel, special heat treatment, pneumatic use
- Capable of 180 degree direction conversion

Air Universal Joint



Item NO.	Size	Weight	Volume	RMB
----------	------	--------	--------	-----

- Made of high quality chromium-molybdenum alloy steel, special heat treatment, pneumatic use
- Capable of 180 degree direction conversion

Level Pneumatic Universal Joint



Item NO.	Size	Length	Aperture	Joint	Weight	Volume	RMB
----------	------	--------	----------	-------	--------	--------	-----

- Made of chromium molybdenum steel with a phosphated surface, it has the characteristics of high torque, impact resistance, and durability.
- The head rotates 360 degrees and has a 60 degree tapered angle, suitable for special working conditions.
- Equipped with strong buffering function, it can alleviate stress damage caused by direct force inside the universal joint.


Spark Plug Socket



Item NO.	Size	W	H	RMB
CL205214	14mm			
CL205216	16mm			

- Chromium-vanadium steel, special heat treatment, superior mechanical properties.
- Product surface is chrome plated.
- Built-in strong magnetic, can easily suck out the spark plug.
- Universal head, can be arbitrarily changed direction, suitable for small space operation.


Adapter(Mirror)



Item NO.	Size	L(mm)	W(mm)	Q(mm)	H(mm)	W	H	RMB
CL202501	3/8"→1/4"	25	8	16	6.2	16/1000	0.02	
CL202601	1/2"→3/8"	25	11	22	9.4	20/300	0.05	
CL202502	1/4"→3/8"					16/320	0.02	

- Made of high-quality chromium-vanadium steel by cold forging, with square tenon outside and square hole inside
- As a socket conversion square tenon application
- From large to small, it is not in the scope of insurance


Impact Adapter



Item NO.	Size	L(mm)	W(mm)	Q(mm)	H(mm)	W	H	RMB
CL203001	1/2"→3/4"	52	20	34	19	12/96	0.25	
CL203101	3/4"→1"	62	26	50	25.3	5/40	0.48	
CL202701	3/4"→1/2"	54	16	36	12.68	12/120	0.18	
CL202801	1"→3/4"	48	22	26	19	5/40	0.43	

- Made of high quality chrome-molybdenum alloy steel, suitable for use with pneumatic tools
- The outside is a square tenon, the inside is a square hole, as a socket conversion square tenon application
- Large to small is not covered by insurance

Three Functional Connector



Item NO.	Size	L(mm)	Q(mm)	H(mm)	W	H	RMB
CL203201	3/4"→1"	78	25.2	43	350	0.44	
CL203202	3/8"→1/2"	44	12.7	24	20/400	0.07	
CL203203	1/2"→3/8"	35	9.3	22	20/400	0.07	

- Made of high quality chromium and vanadium steel by cold forging, with square tenon outside
- The tail end can be used with the slide rod



Quick Changeover Head



Item NO.	Size	W	H	RMB
CL306101	1/4"			
CL306102	3/8"			
CL306103	1/2"			

- Comply with DIN 3123 manufacturing requirements
- Made of high-quality chromium-vanadium steel, heat-treated with high strength and toughness
- Insert the corresponding dual-purpose ratchet, which can be converted into a ratchet wrench through this joint
- 1/4" with 10mm two-way ratchet use, and 3/8" with 13mm two-way ratchet use
- 1/2" with 19mm bidirectional ratchet use

Electrophoresis Wheel Wrench




Item NO.	Size	L(mm)	A(mm)	B(mm)	D(mm)	W	H	RMB
CL304301	22x24	320	22	24	22	15		
CL304302	24x27	320	24	27	22	15		
CL304303	27x30	400	27	30	25	10		
CL304304	30x32	400	30	32	25	10		
CL304305	32x33	400	32	33	25	10		
CL304306	30x33	400	30	33	25	10		
CL304307	21x41	400	21	41	25	10		
CL304308	22x38	400	22	38	25	10		
CL304310	17x35	400	17	35	25	10		
CL304311	27x32	400	27	32	25	10		
CL304313	21x38	400	21	38	25	10		

- Made of high quality alloy steel, surface electrophoretic anti-rust treatment
- Can be used with straight rod, often used for vehicle tire disassembly and assembly



Mat Finish Crowbar



Item NO.	Size	L(mm)	W(mm)	H(mm)			RMB
CL304501	Φ19X400	400	19	20	20		
CL304508	Φ20X450	450	19	20	20		

- Made of high quality alloy steel, the surface is chrome plated and rust resistant
- Used for disassembly and assembly of tires, and used with tire wrenches

Mirror Finish Crowbar



Item NO.	Size			RMB
CL304520	12"/300	50		
CL304521	16"/400	30		
CL304522	20"/500	30		
CL304523	24"/600	20		

- Made of high quality alloy steel based on the principle of human mechanics
- Surface polishing chrome plated mirror treatment, beautiful and practical

Electrophoresis Finish Crowbar



Item NO.	Size			RMB
CL304504	Φ19X600	20		

- Made of high quality alloy steel, surface electrophoretic anti-rust treatment
- Used for disassembly and assembly of tires, and used with tire wrenches.

Crowbar



Item NO.	Size			RMB
CL304539	15"(35X6X380 mm)	6	0.65	

- Made of high quality alloy steel based on the principle of human mechanics
- The surface is sprayed with anti-rust treatment, beautiful and durable

Spraying Plastic Crowbar



Item NO.	Size			RMB
CL304503	10"/200			
CL304505	20"/500	40		
CL304506	24"/600	40		
CL304507	28"/700	50		

- Made of high quality alloy steel based on the principle of human mechanics
- The surface is sprayed with anti-rust treatment, beautiful and durable

Crowbar



Item NO.	Size			RMB
CL304535	18X400	24		
CL304536	19X600	16	1.44	
CL304537	22X800	8	2.38	
CL304538	22X1000	8	3.05	

- Forged with special tool steel and quenched
- The surface is sprayed with anti-rust treatment, which is used for installing automobile or mechanical equipment

Crowbar



Item NO.	Size	🔧	📏	RMB
CL304531	16X450	4/16		
CL304532	18X600	4/8		
CL304533	20X1000	2/6		

- Forged with special tool steel and quenched
- Nail-shaped horn, suitable for long time workers

Multifunction Crowbar



Item NO.	Size	🔧	📏	RMB
CL304534	S18X700	2/6		

- Forged with special alloy steel and quenched
- Adopt the principle of human mechanics, spray treatment, beautiful and durable
- There is a glue handle in the middle for easy grip and adjustment

8-in-1 Socket Wrench



Item NO.	Size	🔧	📏	RMB
CL305108	12、13、14、15、 16、17、18、19	6/36	0.56	

- 8-in-1 design, functional coverage of 12~19mm, easy to carry
- The whole high quality chromium vanadium steel forging, the whole heat treatment and equipped with strong magnet
- Anti-rust treatment of mirror electroplating surface, essential for DIY home maintenance

Cross Rim Wrench



Item NO.	Size	🔧	📏	RMB
CL304714	14" (17X19X21X23)	12	1.20	
CL304716	16" (17X19X21X23)	12	1.38	
CL304718	18" (17X19X21X23)	12	1.49	
CL304720	20" (17X19X21X23)	12	1.67	

- Made of high quality chromium vanadium steel, special heat treatment, knurled non-slip
- Disassembly of special tire bolts and anti-rust treatment of chrome plating on mirror surface

Head Changeable Cross Rim Wrench



Item NO.	Size	🔧	📏	RMB
CL304816	16" (17X19X21X12")	12	1.31	
CL304818	18" (17X19X21X12")	12	1.45	

- Manufactured in accordance with GB/T 14765 standard requirements
- Made of high quality chromium vanadium steel, special heat treatment, knurled non-slip
- Disassembly of special tire bolts and anti-rust treatment of chrome plating on mirror surface



VDE
绝缘



Mirror Finish Type Cross Rim Wrench



Item NO.	Size	🔧	📏	RMB
CL305016	16"(17X19X21X23)	12	1.44	
CL305018	18"(17X19X21X23)	12	1.56	
CL305020	20"(17X19X21X23)	12	1.74	

- Made of high quality chromium vanadium steel, special heat treatment, knurled non-slip
- Disassembly of special tire bolts and anti-rust treatment of chrome plating on mirror surface
- The intermediate reinforced iron sheet protects the welding spot fastness

Rapidly Rotating Tire Wrench



Item NO.	Size	🔧	📏	RMB
CL305501	17X19 21X23	5/10	1.5	

- This product breaks through the traditional structure and can be split, making it more convenient to carry
- Standard 1/2" interface can be used with different specifications of socket
- Made of 50BV30 high quality chromium-vanadium steel, integral forging, heat treatment, super torque, to ensure durable products
- With a tool kit, easy to carry


Foldable Cross Rim Wrench



Item NO.	Size	🔧	📏	RMB
CL304614	14"(17X19X21X23)	12	1.34	

- Made of high quality chromium vanadium steel, special heat treatment, foldable
- Disassembly of special tire bolts and anti-rust treatment of chrome plating on mirror surface

1/2" Series Retractable Tire Wrench



Item NO.	Size	L(mm)	W(mm)	🔧	📏	RMB
CL304401	17X19 21X23	480	70	6/24	1.20	

- Made of high-quality Cr-V steel; Special heat treatment
- Telescopic design, used for removing tire bolts, with rubber socket handle to apply torque comfortably and conveniently


3/4" Cross Rim Wrench



Item NO.	Size	🔧	📏	RMB
CL304925	25"(24X27X32X34")	6	3.08	

- Made of high quality chromium vanadium steel, special heat treatment, knurled non-slip
- Disassembly of special tire bolts and anti-rust treatment of chrome plating on mirror surface


"L" Type Crow Bar Wheel Wrench



Item NO.	Size	L(mm)	W(mm)	D1(mm)	D2(mm)	🔧	📏	RMB
CL302317	17mm	320	80	16	26	25	0.54	
CL302319	19mm	320	80	16	28	25	0.54	
CL302321	21mm	320	80	16	30	25	0.55	
CL302322	22mm	320	80	16	31	25	0.57	
CL302323	23mm	320	80	16	32	25	0.55	
CL302324	24mm	320	80	16	34	25	0.58	

- Made of high quality chromium vanadium steel, with one end socket and one end pry bar
- Used for disassembly and installation of tire screws for small vehicles

"L" Type Wrench With Hole

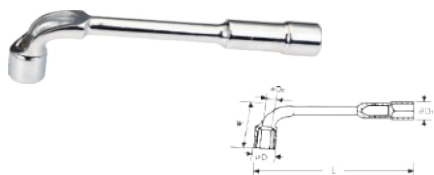

Item NO.	Size	L(mm)	W(mm)	D1(mm)	D2(mm)	Weight	Volume	RMB
CL304106	6mm	105	25	12	8	15/270	0.05	
CL304107	7mm	110	25	12	8	15/360	0.05	
CL304108	8mm	125	25	12	8	12/192	0.05	
CL304109	9mm	125	30	14	9	8/192	0.07	
CL304110	10mm	135	30	15	9	8/192	0.09	
CL304111	11mm	135	30	16	10	8/256	0.12	
CL304112	12mm	150	35	18	11	8/120	0.14	
CL304113	13mm	165	40	19	11	8/120	0.16	
CL304114	14mm	165	40	21	13	6/120	0.19	
CL304115	15mm	175	40	22	13	10/150	0.24	
CL304116	16mm	185	40	23	13	12/72		
CL304117	17mm	200	45	25	15	8/72	0.33	
CL304118	18mm	210	50	27	16	6/90	0.39	
CL304119	19mm	220	50	27	16	6/90	0.44	
CL304120	20mm	225	50	29	16	6/90	0.48	
CL304121	21mm	250	50	29	17	12/48	0.56	
CL304122	22mm	250	55	31	17	6/24	0.61	
CL304123	23mm	255	60	32	19	6/48	0.73	
CL304124	24mm	265	65	34	19	6/24	0.71	
CL304127	27mm	285	65	37	21	10	0.96	
CL304130	30mm	-	-	-	-	25	1.08	
CL304132	32mm	-	-	-	-	20	1.39	
CL304136	36mm	365	90	48	24		1.68	

- Made of 50BV30 high quality chromium vanadium steel
- Used for nut installation and disassembly, perforated design, suitable for slender bolt, can prevent the nut from slipping

Mirror Finish "Y" Type Socket Wrench



Item NO.	Size	Weight	Volume	RMB
CL306001	8X9X10	20/80	0.24	
CL306002	8X10X12	20/80	0.28	
CL306003	10X12X14	20/80	0.32	
CL306004	12X14X17	20/80	0.38	
CL306005	14X17X19	20/80	0.43	
CL306006	12X13X14	20/80	0.35	

- Made of high quality chromium vanadium steel, rod diameter 10
- Used for automobile, electric, motorcycle maintenance, special heat treatment; Strong and durable

"T" Type Socket Wrench With Rubber Handle



Item NO.	Size	Weight	Volume	RMB
CL402507	7mm	10/60	0.26	
CL402508	8mm	10/60	0.27	
CL402509	9mm	10/60	0.33	
CL402510	10mm	10/60	0.28	
CL402511	11mm	10/60	0.34	
CL402512	12mm	10/60	0.30	
CL402513	13mm	10/60	0.31	
CL402514	14mm	10/60	0.31	
CL402515	15mm	10/60	0.32	
CL402516	16mm	10/60	0.38	
CL402517	17mm	10/60	0.34	
CL402518	18mm	10/60	0.40	
CL402519	19mm	10/60	0.36	


- Made of high quality chromium vanadium steel, integral heat treatment
- Unique design, the rod diameter is 10 and the rod length is 300mm
- For automobile, electric and motorcycle maintenance, it is more suitable for working in narrow space
- Handle length up to 200mm, greater torque, handle non-slip plastic sheath

Mirror Finish "T" Type Socket Wrench



Item NO.	Size	Weight	Volume	RMB
CL402606	6mm	10/60	0.28	
CL402607	7mm	10/60	0.29	
CL402608	8mm	10/60	0.28	
CL402609	9mm	10/60	0.28	
CL402610	10mm	10/60	0.29	
CL402611	11mm	10/60	0.31	
CL402612	12mm	10/60	0.32	
CL402613	13mm	10/60	0.33	
CL402614	14mm	10/60	0.32	
CL402615	15mm	10/60	0.32	
CL402616	16mm	10/60	0.33	
CL402617	17mm	10/60	0.36	
CL402618	18mm	10/60	0.38	
CL402619	19mm	10/60	0.37	

- Made of high quality chromium-vanadium steel, mirror-polished chromium-plated anti-rust treatment
- Unique design, the rod diameter is 10 and the rod length is 300mm
- For automobile, electric and motorcycle maintenance, it is more suitable for working in narrow space
- Handle length up to 200mm, greater torque applied, handle knurled anti-slip treatment



1/2" Full Polished Pointer Type Torque Wrench



Item NO.	Size	🔧	📏	RMB
CL303430	300N.m	20	0.99	

- Chromium-vanadium steel, anti-rust treatment of mirror.Integral quenching, high hardness of the operating rod
- The pointer table is the display area of torque value device, and the handle knurled anti-skid design
- This product belongs to precision instruments!Do not use outside the torque range

1/2" Professional Preset Type Torque Wrench



Item NO.	Size	🔧	📏	RMB
CL305401	40-200N.m(1/2)	10	2.70	
CL305402	60-300N.m(1/2)	10	2.72	
CL305406	20-100N.m(1/2)	10	1.33	

- Double scale, can accurately set the torque value.
- Locking ring can avoid misoperation to change the set torque value.When the set torque value is reached, a clear signal sound is issued, and a slight vibration can be felt on the handle.
- This product belongs to precision instruments!Do not use outside the torque range

1/2" Mat Finish Pointer Type Torque Wrench



Item NO.	Size	🔧	📏	RMB
CL303530	300N.m	20	1.49	

- Chromium-vanadium steel, anti-rust treatment of mirror.Integral quenching, high hardness of the operating rod
- The pointer table is the display area of the torque value device, and the pressure torque of the handle with the jacket is comfortable
- This product belongs to precision instruments!Do not use outside the torque range

1/2" Professional Fixed-distance Type Torque Wrench



Item NO.	Size	🔧	📏	RMB
CL303620	42-210N.m	10	2.14	
CL303630	50-250N.m	8	2.75	

- Passed the German TUV GS certification requirements and can be exported to EU countries
- Accuracy $\pm 3\%$.Long service life of seamless steel pipe body, fastening and adjusting torsion is convenient
- Used for removing and fastening spindles and tire bolts of precision machinery, it is the first choice safety tool for car safety, durable
- This product belongs to precision instruments!Do not use outside the torque range

3/4" Full Polished Torque Wrench



Item NO.	Size	🔧	📏	RMB
CL303450	500N.m	12		

- Chromium-vanadium steel, anti-rust treatment of mirror.Integral quenching, high hardness of the operating rod
- The pointer table is the display area of torque value device, and the handle knurled anti-skid design
- This product belongs to precision instruments!Do not use outside the torque range

3/4" Professional Preset Type Torque Wrench



Item NO.	Size	🔧	📏	RMB
CL305403	150-500N.m	10	1.33	
CL305407	280-760N.m	5	4.86	
CL305408	200-1000N.m	5	7.36	

- Double scale, can accurately set the torque value
- Locking ring can avoid misoperation to change the set torque value
- When the set torque value is reached, a clear signal sound will be issued, and slight vibration can be felt on the handle
- This product belongs to precision instruments!Do not use outside the torque range

1" Professional Preset Type Torque Wrench



Item NO.	Size	🔧	📦	RMB
CL305404	500-2000N.m	5	11.07	

- Double scale, can accurately set the torque value.
- Locking ring can avoid misoperation to change the set torque value.
- When the set torque value is reached, a clear signal sound will be issued, and slight vibration can be felt on the handle
- This product belongs to precision instruments! Do not use outside the torque range

Adjustable Torque Wrench



Item NO.	Size	🔧	📦	RMB
CL306201	6.3mm 5-25N.m	0.38		
CL306202	10mm 10-60N.m	1.32		
CL306206	12.5mm 30-210N.m	1.59		
CL306207	12.5mm 60-330N.m	1.79		

- Aluminum alloy knurled handle, effectively prevent slipping.
- The pull-down locking structure adjusts the torque for easy use
- This product belongs to precision instruments! It is strictly prohibited to use beyond the torque range

Professional Adjustable Torque Wrench



Item NO.	Size	分度值	🔧	📦	RMB
CL306211	1-5N.m	0.05	1/12		
CL306212	5-25N.m	0.2	1/12		
CL306213	10-50N.m	0.5	1/12		
CL306214	20-100N.m	0.5	1/12		
CL306215	40-200N.m	1	1/6		
CL306216	60-300N.m	1.5	1/6		

- High performance springs ensure product stability, and aluminum alloy knurled handles effectively prevent slipping.
- Pull down locking structure to adjust torque, easy to operate and use

Digital Torque Wrench



Item NO.	Size	🔧	📦	RMB
CL305411	40-200N.M	1	2.17	

- Meet the manufacturing requirements of ASME B107.300
- Digital display torque wrench adopts digital microprocessor, which has a higher controllable accuracy of 2% than ordinary mechanical torque wrench. Can use public, British system of four different units of measurement display, conversion. (N.m, Kg.m; ibf.in; ibf.ft).
- Digital display has two options: peak hold mode and tracking mode.
 - * The required torque can be preset. When the applied torque reaches the preset value, it will be preset according to the sound or light alarm.
 - * The tenon is connected with a bidirectional ratchet mechanism, the tenon can be positive and counterclockwise bidirectional rotation.
- Margin of error: +/- 2%
- Connecting the mortise: 1/2"
- Display accuracy: 0.1N.m
- Use batteries: 2 No. 5 dry batteries

Digital Torque Wrench



Item NO.	Size		Square Drive	📦	RMB
	N.m	Lbf.ft			
CL306401	2-10	1.5-4.5	1/4"	0.48	
CL306402	3-30	2.3-23	3/8"	0.48	
CL306403	6-60	4.5-45	1/2"	1.02	
CL306404	10-100	7.5-75	1/2"	1.02	
CL306405	20-200	15-150	1/2"	1.48	
CL306406	30-300	23-230	1/2"	1.48	
CL306407	50-500	38-380	3/4"	1.78	
CL306408	100-1000	75-750	3/4"	3.10	
CL306409	150-1500	150-1500	1"	5.10	
CL306410	300-3000	230-2300	1"	9.80	

- Support clockwise and counterclockwise operation
- Large screen with gorgeous color LCD display
- With LED sound and light alarm function, buzzer and color frame alarm simultaneously
- 1 minute automatic brightness reduction to reduce battery loss and extend service time
- The handle is made of high-quality imported materials, with effective anti-slip and excellent grip feel
- Adopt chip overload protection, with bottom protection function, maximize the protection of wrenches and users
- A variety of unit options: N.m, Lb.ft, Lb.in, kg.cm



Professional Adjustable Torque Wrench



Item NO.	Size	Joint	Size		RMB
			N.m	Lbf.ft	
CL306221	5-25N.m	1/4"	20		
CL306222	10-60N.m	3/8"	16		
CL306223	10-110N.m	1/2"	16		
CL306224	30-210N.m	1/2"	16		
CL306225	60-330N.m	1/2"	12		
CL306226	80-400N.m	1/2"	12		

- The torque wrench body is a seamless steel pipe structure, sturdy and durable, with a forward accuracy of less than $\pm 3\%$ error.
- The wrench surface is treated with a special coating, which has the characteristics of anti slip and easy cleaning of oil stains. The coating is not easy to rust or peel off. The handle is made of 6061 aluminum alloy material, which is anti slip, lightweight, and durable.
- The ratchet head adopts a 45 tooth paddle type quick release functional structure, with a reversing device to improve work efficiency.

Interchangeable head Preset Type Torque Wrench



Item NO.	Size		凹方Size	凹	RMB
	N.m	Lbf.ft			
CL306501	0.5-5	2-9	9X12	0.40	
CL306502	5-25	4-19	9X12	0.45	
CL306503	6-30	5-23	9X12	0.48	
CL306504	5-60	9-46	9X12	0.80	
CL306505	10-100	15-75	9X12	0.81	
CL306506	20-210	15-155	14X18	0.87	
CL306507	50-350	50-250	14X18	1.87	
CL306508	100-500	80-376	14X18	1.89	

- Torque wrench body is metal structure, durable, long service life.
- Accuracy: torque error value $\pm 4\%$
- The torque handle is aluminum alloy knurled, which is oil-proof, anti-slip, anti-aging and durable.
- Permanent torque scale on alloy steel pipe, easy for users to read, British control.
- Each torque wrench has a unique product identification number
- Replaceable head design, torque wrench head interface sizes are 9X12 concave square head and 14X18 concave square head respectively.


Professional Adjustable Torque Wrench



Item NO.	Size	Joint	凹	凹	RMB
CL307201	1.5-30N.m	1/4	10		
CL307202	3-60N.m	3/8	10		
CL307203	4.2-85N.m	3/8	6		
CL307204	6.8-135N.m	1/2	6		
CL307205	10-200N.m	1/2	6		
CL307206	17-340N.m	1/2	6		
CL307207	20-400N.m	1/2	6		

- The product design and standards comply with the manufacturing requirements of ASME B107.300 electronic torque standard;
- The electronic digital torque wrench body is a seamless steel pipe structure, with a black surface and a special coating that is sturdy, anti slip, and wear-resistant easy to rust, oil stains are easy to clean.
- The core chip of electronic digital torque wrench is the latest energy-saving and efficient chip. The strain gauge adopts German HBM brand SMT, which can more efficient enough to reflect real-time dynamic torque data, with a torque accuracy of $\pm 2\%$ error.
- The ratchet head adopts 45 teeth and can easily change direction by rotating the directional knob, achieving clockwise or counterclockwise operation.

Square Ring Head



Item NO.	Size	方头	RMB	Item NO.	Size	方头	RMB
CL306807	7mm	9X12		CL306914	14mm	14X18	
CL306808	8mm	9X12		CL306915	15mm	14X18	
CL306810	10mm	9X12		CL306916	16mm	14X18	
CL306811	11mm	9X12		CL306917	17mm	14X18	
CL306812	12mm	9X12		CL306918	18mm	14X18	
CL306813	13mm	9X12		CL306919	19mm	14X18	
CL306814	14mm	9X12		CL306921	21mm	14X18	
CL306815	15mm	9X12		CL306922	22mm	14X18	
CL306816	16mm	9X12		CL306924	24mm	14X18	
CL306817	17mm	9X12		CL306927	27mm	14X18	
CL306818	18mm	9X12		CL306930	30mm	14X18	
CL306819	19mm	9X12		CL306932	32mm	14X18	
CL306821	21mm	9X12		CL306934	34mm	14X18	
CL306822	22mm	9X12		CL306936	36mm	14X18	
CL306913	13mm	14X18		CL306941	41mm	14X18	

- Made of high-quality chromium-vanadium steel, integral heat treatment, with latch locking
- Use with removable head preset torque wrench
- The whole head is convenient for tight screw connection and difficult to reach the narrow space

Square Open Head



Item NO.	Size	方头	RMB
CL306607	7mm	9X12	
CL306608	8mm	9X12	
CL306609	9mm	9X12	
CL306610	10mm	9X12	
CL306611	11mm	9X12	
CL306612	12mm	9X12	
CL306613	13mm	9X12	
CL306614	14mm	9X12	
CL306615	15mm	9X12	
CL306616	16mm	9X12	
CL306617	17mm	9X12	
CL306618	18mm	9X12	
CL306619	19mm	9X12	
CL306620	20mm	9X12	
CL306621	21mm	9X12	
CL306622	22mm	9X12	
CL306623	23mm	9X12	
CL306624	24mm	9X12	
CL306627	27mm	9X12	
CL306630	30mm	9X12	
CL306632	32mm	9X12	
CL306634	34mm	9X12	
CL306636	36mm	9X12	
CL306638	38mm	9X12	
CL306641	41mm	9X12	
CL306642	42mm	9X12	
CL306646	46mm	9X12	
CL306648	48mm	9X12	
CL306650	50mm	9X12	

- Made of high-quality chromium-vanadium steel, integral heat treatment, with latch locking
- Use with removable head preset torque wrench
- The whole head is convenient for tight screw connection and difficult to reach the narrow space


Square Ratchet Head



Item NO.	Size	方头	方头	RMB
CL307001	1/4"	9X12		
CL307002	3/8"	9X12		
CL307003	1/2"	9X12		
CL307004	1/2"	14X18		

- Made of high-quality chromium-vanadium steel, integral heat treatment, with latch locking
- Use with removable head preset torque wrench
- The whole head is convenient for tight screw connection and difficult to reach the narrow space

Square Adjustable Head



Item NO.	Size	方头	方头	RMB
CL307101	0-34mm	9X12		
CL307102	0-50mm	9X12		
CL307103	0-34mm	14X18		
CL307104	0-50mm	14X18		

- Made of high-quality chromium-vanadium steel, integral heat treatment, with latch locking
- Use with removable head preset torque wrench
- The whole head is convenient for tight screw connection and difficult to reach the narrow space




VDE
绝缘



WRENCH SERIES




Heavy Adjustable Wrench

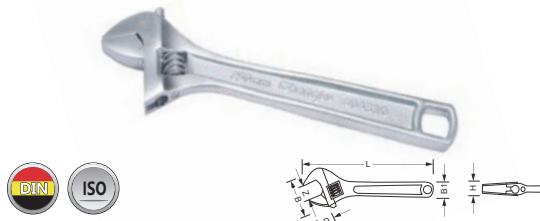

Item NO.	Size	L Middle length	B Head width	Z Hexagon spanner	D Opening depth	H Head thickness	B1 Tail width	Weight	RMB
CL404306	6"	154.00	49.00	22.03	22.03	11.65	19.86	6/120	0.13
CL404308	8"	203.00	58.00	27.98	27.98	13.05	24.14	6/120	0.23
CL404310	10"							6/60	0.37
CL404312	12"	303.00	83.00	37.98	37.98	18.05	31.72	6/36	0.63
CL404315	15"	379.00	96.00	48.34	48.34	20.26	34.88	2/20	1.27

- Alloy steel forging, integral heat treatment, hardness in HRC42~46°
- The head is fine polished, the surface is chrome plated, wear-resistant and rust-resistant
- Precision machining of spanner, flexible opening, stable spanner and large torque

Adjustable Wrench

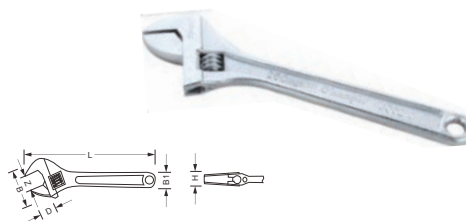

Item NO.	Size	L Middle length	B Head width	Z Hexagon spanner	D Opening depth	H Head thickness	B1 Tail width	Weight	RMB
CL400204	4"	107.00	33.00	15.54	12.48	8.32	14.38	12/240	0.05
CL400206	6"	151.00	45.00	20.66	18.37	11.87	18.86	6/120	0.13
CL400208	8"	205.00	59.00	27.05	23.82	13.72	24.09	6/60	0.25
CL400210	10"	253.00	68.00	32.74	31.06	16.65	27.15	6/60	0.45
CL400212	12"	301.00	80.00	37.31	33.07	20.27	31.54	6/36	0.70

- Alloy steel forging, integral heat treatment, hardness in HRC42~46°
- The head is fine polished, the surface is chrome plated, wear-resistant and rust-resistant
- Precision machining of spanner, flexible opening, stable spanner and large torque
- With precise calibration size under the opening, improve working efficiency


Plastic Handle Adjustable Wrench



Item NO.	Size	L Middle length	B Head width	Z Hexagon spanner	D Opening depth	H Head thickness	B1 Tail width	Weight	RMB
CL404108	8"	160.00	49.00	25.09	21.61	10.47	24.97	6/60	0.14
CL404110	10"	263.00	71.00	37.05	31.55	16.86	38.10	6/48	0.52
CL404112	12"	308.00	83.00	42.76	35.78	18.42	38.26	6/36	0.69

- The head is fine polished, the surface is chrome plated, wear-resistant and rust-resistant
- Precision machining of spanner, flexible opening, stable spanner and large torque
- The quincunx hole with hexagonal square hole tail can be used as quincunx spanner
- Plastic-coated handle, comfortable to hold

Adjustable Wrench

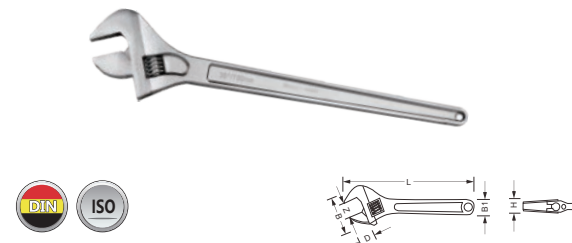

Item NO.	Size	L Middle length	B Head width	Z Hexagon spanner	D Opening depth	H Head thickness	B1 Tail width	Weight	RMB
CL400215	15"	376.00	103.00	50.43	42.98	25.28	25.72	2/18	1.41
CL400218	18"	450.00	123.00	61.38	51.35	28.21	29.08	2/12	2.08
CL400224	24"	600.00	144.00	70.22	61.58	32.30	35.78	1/4	3.61
CL400230	30"	778.00	176.00	91.00	78.00	33.41	36.20	1/3	5.92

- Carbon steel forging, integral heat treatment, hardness in HRC42~46°
- Precision machining of pulling mouth, integral forging of pulling body,
- Precise calibration, exquisite worm gear, open and close freely

Pipe And Adjustable Wrench



Item NO.	Size	L Middle length	B Head width	Z Hexagon spanner	D Opening depth	H Head thickness	B1 Tail width	Weight	RMB
CL404908	8"	212.00	60.00	32.76	26.24	14.96	22.26	6/60	0.33
CL404910	10"	262.00	70.00	41.48	30.71	16.44	28.15	6/48	0.49
CL404912	12"	312.00	88.00	50.34	35.55	19.34	33.58	6/36	0.77

- Alloy steel forging, overall heat treatment including worm gear at HRC42~46°
- The head is fine polished, the surface is chrome plated, wear-resistant and rust-resistant
- The pulling mouth is precisely machined and can also be used as pipe pliers.
- The pulling mouth is in gear shape.
- The quincunx hole with hexagonal square hole tail can be used as quincunx spanner

Adjustable Wrench Black Nickel Square Hole




Item NO.	Size	Weight	RMB
CL407710	10"	6/60	
CL407712	12"	6/36	

- Alloy steel forging, overall heat treatment, sturdy and durable.
- Polished head, surface coated with black nickel, wear-resistant and rust proof.
- The square hole design at the tail facilitates suspension and storage.
- Precision machining of the trigger, flexible opening, stable trigger, and high torque
- Laser precise calibration improves work efficiency




Large Opening Light Adjustable Wrench



Item NO.	Size	L Middle length	B Head width	Z Narrower part	D Opening depth	H Head thickness	B1 Tail width	RMB
CL407106	6"	119.00	44.00	26.56	22.02	11.38	23.78	6/120
CL407108	8"	145.00	55.00	31.14	31.78	12.97	27.78	6/96
CL407110	10"	161.00	68.00	38.93	34.01	15.26	30.20	6/60
CL407112	12"	210.00	86.00	46.72	42.34	18.25	36.30	6/36

- Alloy steel forging, integral heat treatment, hardness in HRC42~46°
- The head is fine polished, the surface is chrome plated, wear-resistant and rust-resistant
- Precision machining of spanner, flexible opening, stable spanner and large torque
- The weight is 30% lighter than the standard wrench of the same scale, with good handle and not easy to fatigue.
- Suitable for small space, mechanical maintenance, car repair, bathroom air conditioning installation, convenient and lexible, easy to keep


Right Angle Spanner



Item NO.	Size	L Middle length	B Head width	Z Narrower part	D Opening depth	H Head thickness	B1 Tail width	RMB
CL404509	9"	238.00	65.00	64.00	36.00	16.09	18.94	5/30
CL404511	11"	284.00	76.00	79.00	44.00	18.23	22.64	6/36
CL404515	15"	375.00	85.00	85.00	46.00	21.57	31.12	2/12

- Alloy steel forging, overall heat treatment including worm gear at HRC42~46°
- The head is fine polished, the surface is chrome plated, wear-resistant and rust-resistant
- The pulling mouth is precisely machined and can also be used as pipe pliers. The pulling mouth is in gear shape.
- The quincunx hole with hexagonal square hole tail can be used as quincunx spanner

Four Multi-purpose Wrench



Item NO.	Size	L Middle length	B Head width	Z Narrower part	D Opening depth	H Head thickness	B1 Tail width	RMB
CL405816	16"	409.00	90.00	47.00	36.00	18.74	6.58	6/24


- Alloy steel forging, integral heat treatment, hardness in HRC42~46°
- Precision machining of pulling mouth and integral forging of pulling body
- The head can be detachable with open wrench in front and pipe wrench in back, making it flexible and convenient to use
- The protruding part of the spanner head can be knocked
- Tail taper design, can replace the use of ordinary small crowbar



Double Open End Spanner



Item NO.	Size		RMB
CL401106	6x7mm	10/500	
CL401108	8x10mm	10/250	
CL401109	9x11mm	10/250	
CL401110	10x12mm	10/250	
CL401111	11x13mm	10/200	
CL401112	12x14mm	10/200	
CL401113	13x15mm	10/200	
CL401114	14x17mm	10/250	
CL401116	13x16mm	10/250	
CL401118	16x18mm	10/200	
CL401119	17x19mm	10/100	
CL401120	19x21mm	10/100	
CL401121	18x21mm	10/100	
CL401122	19x22mm	10/100	
CL401124	22x24mm	10/100	
CL401127	24x27mm	5/50	
CL401130	27x30mm	5/50	
CL401132	30x32mm	5/50	
CL401134	32x34mm	5/20	
CL401136	34x36mm	5/20	




Size	L	D1	C1	D2	C2	B	H	W kg
6x7	123	12.20	5.44	14.15	5.46	7.17	3.55	0.025
8x10	142	16.48	5.38	20.61	5.30	8.75	3.58	0.040
9x11	160	20.60	6.28	24.41	6.20	10.42	4.00	0.060
10x12	160	20.28	5.88	24.29	5.90	10.14	3.60	0.050
11x13	179	24.28	6.34	29.50	6.58	11.83	4.22	0.080
12x14	178	24.60	6.27	29.54	6.34	11.67	3.88	0.070
13x15	187	29.17	7.12	31.18	6.99	13.65	4.20	0.100
14x17	197	29.40	7.29	35.61	7.41	12.91	4.30	0.115
13x16	186	29.42	7.14	31.27	7.22	12.75	4.80	0.105
16x18	196	33.40	7.52	35.20	7.14	13.45	4.37	0.120
17x19	218	35.38	8.24	38.64	8.30	15.65	5.61	0.175
19x21	239	38.49	9.14	44.34	9.03	17.93	6.60	0.250
18x21	240	38.65	9.07	44.14	9.20	17.74	6.05	0.235
19x22	241	38.04	8.76	43.18	8.90	18.08	6.11	0.235
22x24	261	44.22	9.72	49.06	9.57	18.74	7.14	0.325
24x27	283	48.44	10.12	54.94	9.87	21.65	7.00	0.395
27x30	296	56.05	10.71	61.91	10.55	23.84	7.42	0.505
30x32	309	62.30	11.33	66.25	11.44	26.46	8.68	0.650
32x34	315	68.39	12.53	75.72	12.24	29.24	8.55	0.750
34x36	315	67.77	12.88	75.14	12.48	28.44	8.95	0.730

- Forged with chromium vanadium steel, hardness HRC42~45°
- Mirror polishing, chrome plating, rust-proof and wear-resistant treatment
- For quick removal and fastening of hexagon bolts and nuts
- American standard plus long style, labor saving and more durable

Bi-hexagonal Ring Spanner



Item NO.	Size		RMB
CL400906	6X7mm	10/500	
CL400955	5.5x7mm	10/500	
CL400908	8x10mm	10/500	
CL400909	9x11mm	10/250	
CL400910	10x12mm	10/250	
CL400911	11x13mm	10/250	
CL400912	12x14mm	5/200	
CL400913	13x15mm	5/200	
CL400914	14x17mm	5/200	
CL400916	13x16mm	5/200	
CL400918	16x18mm	5/100	
CL400919	17x19mm	5/100	
CL400920	19x21mm	5/100	
CL400921	18x21mm	5/100	
CL400922	19x22mm	5/100	
CL400924	22x24mm	5/100	
CL400927	24x27mm	5/50	
CL400930	27x30mm	5/50	
CL400932	30x32mm	5/50	
CL400934	32x34mm	5/20	
CL400936	34x36mm	5/20	
CL400941	36x41mm	5/20	
CL400946	41x46mm	5/20	
CL400950	46x50mm	3/12	
CL400960	50x55mm	3/12	



Size	L	A	C	D	B	W kg
5.5x7	160	11.13	5.44	6.04	12.23	0.045
6x7	162	10.92	5.35	5.81	11.61	0.045
8x10	175	14.10	6.35	6.49	16.22	0.060
9x11	190	15.53	7.17	7.81	18.60	0.090
10x12	192	16.09	7.19	7.77	19.09	0.100
11x13	205	18.81	7.25	8.50	22.11	0.125
12x14	205	19.13	8.16	8.41	22.34	0.110
13x15	225	22.50	8.52	9.00	24.10	0.135
14x17	228	21.95	8.77	9.30	25.41	0.150
13x16	225	21.81	9.00	9.22	23.64	0.145
16x18	225	24.53	9.10	9.18	25.95	0.145
17x19	245	26.18	9.52	10.40	28.81	0.200
18x21	265	28.83	10.22	11.13	32.80	0.255
19x22	265	29.80	11.58	11.68	34.32	0.285
22x24	292	33.92	11.96	12.35	37.20	0.340
24x27	348	36.02	12.27	13.15	40.35	0.500
27x30	392	40.97	14.90	15.07	45.40	0.650
30x32	400	45.40	13.69	13.89	47.80	0.665
32x34	425	47.72	18.14	17.36	51.86	0.820
34x36	427	49.13	16.31	17.58	52.81	0.815
36x41	450	58.53	18.50	18.84	66.54	1.375
41x46	490	60.80	22.31	23.74	65.80	1.900
46x50	525	71.00	22.65	22.66	77.15	2.105
50x55	545	73.08	24.62	24.95	79.18	2.470

- Forged with chromium vanadium steel, hardness HRC42~45°
- Mirror polishing, chrome plating, rust-proof and wear-resistant treatment
- For quick removal and fastening of hexagon bolts and nuts
- Head bend 45° to facilitate fastening and removing bolts in holes
- American standard plus long style, labor saving and more durable



VDE
绝缘



Combination Spanner



Item NO.	Size		RMB
CL401006	6mm	10/500	
CL401007	7mm	10/500	
CL401008	8mm	10/500	
CL401009	9mm	10/500	
CL401010	10mm	10/500	
CL401011	11mm	10/200	
CL401012	12mm	10/200	
CL401013	13mm	10/200	
CL401014	14mm	5/200	
CL401015	15mm	5/200	
CL401016	16mm	5/200	
CL401017	17mm	5/100	
CL401018	18mm	5/100	
CL401019	19mm	5/100	
CL401020	20mm	5/80	
CL401021	21mm	5/100	
CL401022	22mm	5/100	
CL401023	23mm	5/60	
CL401024	24mm	5/50	
CL401025	25mm	5/50	
CL401026	26mm	5/50	
CL401027	27mm	5/50	
CL401028	28mm	5/50	
CL401030	30mm	5/50	
CL401032	32mm	5/50	
CL401034	34mm	5/20	
CL401036	36mm	5/20	



Size	L	D	C	B	A	H	T	W
6mm	125	13.55	5.35	10.85	5.77	7.06	3.55	0.025
7mm	126	13.38	4.79	11.83	5.51	6.56	3.21	0.020
8mm	140	16.33	5.12	13.38	6.12	7.87	3.36	0.030
9mm	149	18.23	5.22	14.70	6.43	86.90	3.59	0.035
10mm	158	20.48	5.85	15.98	7.04	9.56	3.81	0.045
11mm	165	22.25	6.58	18.32	7.58	11.41	4.35	0.065
12mm	170	24.66	6.34	19.01	8.01	11.34	4.17	0.065
13mm	175	26.34	6.53	19.52	8.26	12.17	4.40	0.075
14mm	188	28.73	7.07	21.91	8.78	12.73	4.53	0.090
15mm	197	31.50	7.22	23.16	9.09	13.73	4.88	0.110
16mm	207	32.92	7.23	24.90	9.34	14.07	4.94	0.120
17mm	224	35.00	7.92	26.62	10.60	14.81	5.42	0.150
18mm	234	37.30	8.07	27.37	10.25	15.00	5.36	0.160
19mm	247	38.72	8.28	28.77	10.72	16.50	5.88	0.195
20mm	247	38.63	7.80	27.86	10.80	16.84	5.34	0.190
21mm	273	43.14	8.90	30.64	11.60	18.13	6.25	0.245
22mm	291	44.90	9.05	32.70	11.07	19.01	6.00	0.270
23mm	292	44.87	9.38	32.58	11.10	19.44	5.78	0.275
24mm	312	49.77	10.04	35.05	13.00	21.54	7.21	0.385
25mm	323	51.94	9.87	36.57	13.30	22.21	6.95	0.400
26mm	321	53.45	9.84	38.46	12.87	21.83	6.91	0.410
27mm	334	56.09	10.95	39.33	13.61	21.94	7.59	0.460
28mm	334	56.00	11.04	39.61	13.85	22.15	7.84	0.470
30mm	350	61.67	10.88	44.65	14.14	23.47	7.78	0.545
32mm	370	65.29	11.91	47.10	15.31	24.27	8.27	0.640
34mm	451	72.61	13.08	52.87	17.67	28.05	9.22	1.010
36mm	450	72.15	13.42	53.14	17.96	27.87	9.61	0.980

- Forged with chromium vanadium steel, hardness HRC42~45°
- Mirror polishing, chrome plating, rust-proof and wear-resistant treatment
- Bend the head 15° for easy fastening of dented hex bolts and nuts
- American standard plus long style, labor saving and more durable

Double Open End Spanner



Item NO.	Size		RMB
CL405106	6X7mm	10/500	
CL405108	8X10mm	10/500	
CL405109	9X11mm	10/300	
CL405110	10X12mm	10/300	
CL405112	12X14mm	10/300	
CL405113	13X15mm	10/200	
CL405114	14X17mm	10/200	
CL405116	13X16mm	10/200	
CL405118	16X18mm	10/200	
CL405119	17X19mm	5/100	
CL405121	18X21mm	5/100	
CL405122	19X22mm	5/100	
CL405124	22X24mm	5/100	
CL405127	24X27mm	5/100	
CL405130	27X30mm	5/50	
CL405132	30X32mm	5/50	

- Forged by high carbon steel, hardness HRC42~45°
- For quick removal and fastening of hexagon bolts and nuts

Bi-hexagonal Ring Spanner



Item NO.	Size		RMB
CL405206	6X7mm	10/300	
CL405208	8X10mm	10/300	
CL405209	9X11mm	10/200	
CL405210	10X12mm	10/200	
CL405212	12X14mm	5/250	
CL405213	13X15mm	5/150	
CL405214	14X17mm	5/150	
CL405216	13X16mm	5/150	
CL405218	16X18mm	5/150	
CL405219	17X19mm	5/100	
CL405221	18X21mm	5/100	
CL405222	19X22mm	5/100	
CL405224	22X24mm	5/60	
CL405227	24X27mm	5/60	
CL405230	27X30mm	5/60	
CL405232	30X32mm	5/60	

- Forged by high carbon steel, hardness HRC42~45°
- For quick removal and fastening of hexagon bolts and nuts
- Head bend 45° to facilitate fastening and removing bolts in holes

Combination Spanner




Item NO.	Size		RMB
CL405306	6mm	10/500	
CL405307	7mm	10/500	
CL405308	8mm	10/300	
CL405309	9mm	10/300	
CL405310	10mm	10/300	
CL405311	11mm	10/300	
CL405312	12mm	10/300	
CL405313	13mm	10/300	
CL405314	14mm	5/100	
CL405315	15mm	5/100	
CL405316	16mm	5/100	
CL405317	17mm	5/100	
CL405318	18mm	5/100	
CL405319	19mm	5/100	
CL405321	21mm	5/100	
CL405322	22mm	5/100	
CL405323	23mm	5/100	
CL405324	24mm	5/60	
CL405327	27mm	5/60	
CL405330	30mm	5/60	
CL405332	32mm	5/60	

- Conforms to DIN 3113 ISO 3318 Type A standard
- Forged by high carbon steel, hardness HRC42~45°
- Bend the head 15° for easy fastening of dented hex bolts and nuts

Double Open End Spanner



Item NO.	Size		RMB
CL410855	5.5X7mm	10/500	
CL410806	6X7mm	10/500	
CL410808	8X10mm	10/500	
CL410809	9X11mm	10/500	
CL410810	10X12mm	10/250	
CL410811	11X13mm	10/250	
CL410812	12X14mm	10/250	
CL410813	13X15mm	10/250	
CL410814	14X17mm	10/250	
CL410816	13X16mm	10/250	
CL410818	16X18mm	10/250	
CL410819	17X19mm	10/150	
CL410821	18X21mm	10/150	
CL410822	19X22mm	10/150	
CL410824	22X24mm	5/60	
CL410827	24X27mm	5/60	
CL410830	27X30mm	5/60	
CL410832	30X32mm	5/40	
CL410834	32X34mm	5/40	
CL410836	32X36mm	5/40	
CL410841	36X41mm	5/30	



Size	L	D1	C1	D2	C2	B	H	W kg
5.5*7	111	16.34	4.23	18.51	4.02	9.44	3.07	0.025
6*7	111	16.40	4.15	18.40	4.14	9.46	2.97	0.025
8*10	125	19.71	4.36	22.58	4.61	10.46	3.49	0.035
9*11	137	22.92	5.10	26.10	5.17	11.95	3.62	0.050
10*12	138	23.24	5.20	26.32	5.25	12.10	3.86	0.055
11*13	145	25.88	5.60	28.90	5.45	12.18	3.68	0.060
12*14	153	27.72	5.45	31.64	5.38	13.66	3.55	0.070
13*15	156	28.00	5.59	32.96	5.71	13.81	3.95	0.075
14*17	168	31.35	6.12	36.51	6.07	15.25	4.26	0.100
13*16	157	27.88	6.07	32.85	5.92	13.65	4.07	0.080
16*18	175	32.87	6.25	37.04	6.21	14.91	4.46	0.105
17*19	188	36.11	7.25	40.25	7.36	16.54	5.36	0.150
18*21	193	36.56	7.28	42.51	7.52	17.50	5.16	0.160
19*22	210	40.05	7.45	44.65	7.68	18.57	5.33	0.185
22*24	230	44.54	8.43	49.60	8.34	19.92	6.26	0.245
24*27	250	49.95	8.98	54.91	8.79	21.86	6.94	0.335
27*30	264	54.60	9.54	58.43	9.55	23.88	6.94	0.390
30*32	278	57.36	10.13	63.39	10.25	25.61	7.32	0.465
32*34	303	65.34	11.77	69.08	11.82	28.73	8.84	0.675
32*36	303	65.50	11.46	69.21	11.50	28.75	8.50	0.650
36*41	325	73.14	12.55	80.04	12.04	32.90	8.79	0.850


- Forged by high carbon steel, hardness HRC42~45°
- Mirror polishing, chrome plating, rust-proof and wear-resistant treatment.
- For quick removal and fastening of hexagon bolts and nuts



Bi-hexagonal Ring Spanner



Item NO.	Size		RMB
CL410606	6X7mm	10/500	
CL410608	8X10mm	10/500	
CL410609	9X11mm	10/280	
CL410610	10X12mm	10/280	
CL410611	11X13mm	10/280	
CL410612	12X14mm	10/280	
CL410613	13X15mm	5/180	
CL410614	14X17mm	5/180	
CL410616	13X16mm	5/200	
CL410618	16X18mm	5/150	
CL410619	17X19mm	5/150	
CL410621	18X21mm	5/100	
CL410622	19X22mm	5/100	
CL410624	22X24mm	5/100	
CL410627	24X27mm	5/60	
CL410630	27X30mm	5/60	
CL410632	30X32mm	5/60	
CL410634	32X34mm	5/40	
CL410636	32X36mm	5/40	
CL410641	36X41mm	5/20	
CL410655	5.5X7mm	10/500	



Size	L	A	C	D	B	W kg
5.5*7	121	11.17	4.74	4.71	12.69	0.025
6*7	122	11.23	4.75	5.47	12.66	0.025
8*10	140	14.37	5.24	6.09	16.96	0.040
9*11	160	14.85	6.45	6.97	16.83	0.050
10*12	164	16.73	6.85	7.02	19.11	0.060
11*13	190	19.17	8.22	7.93	21.97	0.075
12*14	190	19.64	6.67	6.96	21.67	0.080
13*15	190	20.34	7.30	7.82	24.25	0.085
14*17	220	22.06	9.10	9.03	26.03	0.135
13*16	217	21.99	8.55	8.47	25.59	0.130
16*18	222	24.52	8.21	9.05	27.07	0.130
17*19	252	25.26	9.51	10.12	28.58	0.185
18*21	255	26.80	9.59	9.49	31.35	0.185
19*22	295	29.21	10.39	10.53	32.82	0.240
22*24	297	32.47	10.30	10.55	34.67	0.270
24*27	345	35.85	10.92	12.01	39.18	0.375
27*30	372	39.82	12.30	12.95	44.34	0.530
30*32	400	44.28	13.96	14.42	47.05	0.605
32*34	420	47.52	15.90	17.94	52.61	0.820
32*36	420	47.07	15.38	16.63	53.31	0.775
36*41	455	53.04	17.46	17.96	59.93	1.055

- Forged by high carbon steel, hardness HRC42~45°
- Mirror polishing, chrome plating, rust-proof and wear-resistant treatment
- For quick removal and fastening of hexagon bolts and nuts
- Head bend 45° to facilitate fastening and removing bolts in holes

Combination Spanner



Item NO.	Size		RMB
CL410706	6mm	10/500	
CL410707	7mm	10/500	
CL410708	8mm	10/500	
CL410709	9mm	10/500	
CL410710	10mm	10/500	
CL410711	11mm	10/500	
CL410712	12mm	10/250	
CL410713	13mm	10/250	
CL410714	14mm	10/150	
CL410715	15mm	10/150	
CL410716	16mm	10/150	
CL410717	17mm	10/150	
CL410718	18mm	10/150	
CL410719	19mm	10/150	
CL410721	21mm	5/60	
CL410722	22mm	5/60	
CL410724	24mm	5/60	
CL410727	27mm	5/60	
CL410730	30mm	5/30	
CL410732	32mm	5/30	
CL410734	34mm	5/30	
CL410736	36mm	5/20	
CL403241	41mm	3/12	
CL403246	46mm	3/12	
CL403250	50mm	10	
CL403255	55mm	10	
CL403260	60mm	8	
CL403265	65mm	8	



Size	L	D	C	B	A	H	T	W kg
6mm	101	14.06	4.08	11.30	4.64	7.61	3.00	0.020
7mm	122	15.78	4.58	12.72	4.95	7.92	3.18	0.025
8mm	125	17.68	5.45	14.27	5.84	9.06	3.74	0.035
9mm	129	19.06	5.64	15.66	6.37	10.08	4.09	0.040
10mm	142	21.50	5.57	16.15	6.45	10.54	3.75	0.045
11mm	153	23.16	6.04	17.46	7.11	10.63	3.91	0.055
12mm	162	25.33	6.26	18.86	7.35	11.44	4.13	0.065
13mm	174	27.60	6.67	20.08	7.87	12.26	4.64	0.080
14mm	183	29.87	6.82	21.61	7.47	12.96	4.35	0.090
15mm	183	32.17	6.76	23.94	8.40	13.71	4.16	0.095
16mm	195	34.49	7.26	25.09	8.43	13.65	4.41	0.110
17mm	208	35.74	6.88	26.87	8.94	14.69	4.45	0.125
18mm	218	37.29	7.18	27.36	9.10	15.10	4.59	0.140
19mm	230	39.84	7.45	28.21	9.87	16.60	4.81	0.160
21mm	251	42.83	7.97	31.92	10.92	18.00	5.28	0.215
22mm	263	44.38	8.26	32.97	11.46	18.36	5.77	0.235
24mm	292	49.02	8.72	36.02	11.05	20.07	5.90	0.295
27mm	318	54.66	9.52	40.22	11.81	21.80	6.56	0.380
30mm	342	58.99	9.99	43.70	12.71	22.95	6.89	0.460
32mm	355	63.61	10.96	46.52	13.80	23.73	6.96	0.545
34mm	387	66.71	11.64	51.09	14.36	26.07	7.66	0.705
36mm	411	69.96	11.48	55.77	15.40	28.31	8.20	0.835

- Forged by high carbon steel, hardness HRC42~45°
- Mirror polishing, chrome plating, rust-proof and wear-resistant treatment
- The quincunx is designed with a 12-angle shape for easy fastening of sunken hexagonal bolts and nuts

Bi-hexagonal Ring Spanner Set



Item NO.	Size	Box	Weight	RMB
CL401208	6X7,8X10, 10X12, 12X14, 14X17, 17X19, 19X22, 22X24mm	15	1.53	
CL401210	6X7,8X10, 10X12, 12X14, 14X17, 17X19, 19X22, 22X24, 24X27, 30X32mm	6	2.75	
CL401212	6X7,8X10, 9X11, 10X12, 11X13, 12X14, 14X17, 17X19, 19X22, 22X24, 24X27, 30X32mm	6	3.06	

- Forged with chromium vanadium steel, hardness HRC42~45°
- Mirror polishing, chrome plating, rust-proof and wear-resistant treatment
- For quick removal and fastening of hexagon bolts and nuts
- Head bend 45° to facilitate fastening and removing bolts in holes

Double Open End Spanner Set



Item NO.	Size	Box	Weight	RMB
CL401408	6X7,8X10, 10X12, 12X14, 14X17, 17X19, 19X22, 22X24mm	8	1.30	
CL401410	6X7,8X10, 10X12, 12X14, 14X17, 17X19, 19X22, 22X24, 24X27, 30X32mm	8	2.42	
CL401412	6X7,8X10, 9X11, 10X12, 11X13, 12X14, 14X17, 17X19, 19X22, 22X24, 24X27, 30X32mm	10	2.64	
CL401414	6X7,8X10, 9X11, 10X12, 11X13, 13X15, 12X14, 14X17, 16X18, 17X19, 19X22, 22X24, 24X27, 30X32mm	4	2.86	

- Forged by high carbon steel, hardness HRC42~45°
- Mirror polishing, chrome plating, rust-proof and wear-resistant treatment
- The quincunx is designed with a 12-angle shape for easy fastening of sunken hexagonal bolts and nuts

Double Open End Spanner Set



Item NO.	Size	Box	Weight	RMB
CL403608	6X7,8X10, 10X12, 12X14, 14X17, 17X19, 19X22, 22X24mm	20	0.93	
CL403610	5.5X7,8X10, 10X12, 12X14, 14X17, 17X19, 19X22, 22X24, 24X27, 30X32mm	12	1.83	
CL403612	6X7,8X10, 9X11, 10X12, 11X13, 12X14, 14X17, 17X19, 19X22, 22X24, 24X27, 30X32mm	12	1.90	

- Forged by high carbon steel, hardness HRC42~45°
- Mirror polishing, chrome plating, rust-proof and wear-resistant treatment
- For quick removal and fastening of hexagon bolts and nuts

Combination Spanner Set



Item NO.	Size	Box	Weight	RMB
CL401308	8, 9, 10, 12, 13, 14, 17, 19mm	6	0.90	
CL401310	8, 9, 10, 11, 12, 13, 14, 17, 19, 22mm	10	1.45	
CL401312	6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 22mm	12	1.53	
CL401314A	8, 9, 10, 11, 12, 13, 14, 17, 19, 21, 24, 27, 30, 32mm	6	2.15	

- Forged with chromium vanadium steel, hardness HRC42~45°
- Mirror polishing chrome plating rust-proof and wear-resistant treatment
- For quick removal and fastening of hexagon bolts and nuts



Combination Spanner Set



Item NO.	Size	🔧	📦	RMB
CL403508	8, 9, 10, 12, 13, 14, 17, 19mm	20	0.76	
CL403510	8, 9, 10, 11, 12, 13, 14, 17, 19, 22mm	8	1.18	
CL403512	6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 22mm	6	1.22	
CL403514A	8, 9, 10, 11, 12, 13, 14, 17, 19, 21, 24, 27, 30, 32mm	12	2.81	
CL403514B	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24mm	12	1.84	

- Forged by high carbon steel, hardness HRC42~45°
- Mirror polishing, chrome plating, rust-proof and wear-resistant treatment
- Bend the head 15° for easy fastening of dented hex bolts and nuts

Electrophoresis Double Headed Wrench Set



Item NO.	Size	🔧	📦	RMB
CL405508	6X7, 8X10, 10X12, 12X14, 14X17, 17X19, 19X22, 22X24mm	8	1.18	
CL405510	6X7, 8X10, 9X11, 10X12, 12X14, 14X17, 17X19, 19X22, 22X24, 24X27, 30X32mm	10	2.36	
CL405512	6X7, 8X10, 9X11, 10X12, 13X15, 12X14, 14X17, 17X19, 18X21, 19X22, 22X24, 24X27, 30X32mm	12	2.62	
CL405514	6X7, 8X10, 9X11, 10X12, 11X13, 13X15, 12X14, 14X17, 16X18, 17X19, 19X22, 18X21, 22X24, 24X27, 30X32mm	14	2.80	

- Forged with 40Cr steel, hardness HRC42~45°
- The surface is treated with electrophoretic rust prevention, and the clamp Angle is 15°
- For quick removal and fastening of hexagon bolts and nuts

Bi-hexagonal Ring Spanner Set



Item NO.	Size	🔧	📦	RMB
CL403408	5.5X7, 8X10, 10X12, 12X14, 14X17, 17X19, 19X22, 22X24mm	25	1.25	
CL403410	5.5X7, 8X10, 10X12, 12X14, 14X17, 17X19, 19X22, 22X24, 24X27, 30X32mm	15	2.28	
CL403412	5.5X7, 8X10, 9X11, 10X12, 11X13, 12X14, 14X17, 17X19, 19X22, 22X24, 24X27, 30X32mm	12	2.69	

- Forged by high carbon steel, hardness HRC42~45°
- Mirror polishing, chrome plating, rust-proof and wear-resistant treatment
- For quick removal and fastening of hexagon bolts and nuts
- Head bend 45° to facilitate fastening and removing bolts in holes

Electrophoretic Combination Spanner Set



Item NO.	Size	🔧	📦	RMB
CL405408	8, 9, 10, 12, 13, 14, 17, 19mm		0.74	
CL405410	8, 9, 10, 11, 12, 13, 14, 17, 19, 22mm		1.19	
CL405412	6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 22mm		1.24	
CL405414	8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24mm		1.97	

Electrophoresis Bi-hexagonal Ring Spanner Set



Item NO.	Size	Weight	Volume	RMB
CL405608	6X7.8X10, 10X12, 12X14, 14X17 17X19, 19X22, 22X24mm	15	1.68	126.00
CL405610	6X7.8X10, 10X12, 12X14, 14X17 17X19, 19X22, 22X24, 24X27 30X32mm	6	3.01	
CL405612	6X7.8X10, 9X11, 10X12, 12X14 14X17, 17X19, 18X21, 19X22 22X24, 24X27, 30X32mm	5		

- Forged with 40Cr steel, hardness HRC42~45°
- The surface is treated with electrophoretic rust prevention
- For quick removal and fastening of hexagon bolts and nuts
- Head bend 45° to facilitate fastening and removing bolts in holes

14pcs Mirror Inch Combination Spanner Set



Item NO.	Size	Weight	Volume	RMB
CL405014	3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4mm	6	3.97	

- It adopts high quality chromium-vanadium steel, the hardness is HRC42~45°
- Mirror polishing, chrome plating, rust-proof and wear-resistant treatment
- Bend the head 15° for easy fastening of dented hex bolts and nuts

24pcs Combination Spanner Set



Item NO.	Size	Weight	Volume	RMB
CL401324	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 26, 27, 28, 30, 32mm	4	5.66	

- Made of chromium-vanadium steel, the overall heat treatment hardness is HRC40~46°
- The surface is mirror polished, chrome plated and rust-proof
- Configuration 6-32mm made of Oxford fabric, beautiful and durable

15pcs Combination Spanner Set



Item NO.	Size	Weight	Volume	RMB
CL401315	8mm 9mm 10mm 11mm 12mm 13mm 14mm 15mm 16mm 17mm 18mm 19mm 21mm 22mm 24mm	8		

- Made of chromium-vanadium steel, the overall heat treatment hardness is HRC40~46°
- The surface is mirror polished, chrome plated and rust-proof
- Configuration 6-32mm made of Oxford fabric, beautiful and durable



Full Polished Gear Combination Spanner



Item NO.	Size		RMB
CL400608	8mm	5/200	
CL400609	9mm	5/200	
CL400610	10mm	5/200	
CL400611	11mm	5/200	
CL400612	12mm	5/200	
CL400613	13mm	5/200	
CL400614	14mm	5/200	
CL400615	15mm	5/100	
CL400616	16mm	5/100	
CL400617	17mm	5/100	
CL400618	18mm	5/100	
CL400619	19mm	5/100	
CL400620	20mm	5/100	
CL400621	21mm	5/50	
CL400622	22mm	5/50	
CL400624	24mm	5/50	
CL400627	27mm	5/40	
CL400630	30mm	5/50	
CL400632	32mm	5/50	



Size	L	D	C	B	A	H	T	W kg
8mm	141	17.91	5.78	18.63	7.31	8.40	3.34	
9mm	149	19.12	5.60	20.07	7.50	8.50	3.27	
10mm	158	21.55	5.70	21.73	7.72	9.93	4.15	
11mm	164	23.55	6.10	22.64	8.28	10.41	4.15	
12mm	168	26.33	6.20	24.80	8.66	11.14	4.29	
13mm	177	27.12	6.93	26.37	9.00	12.67	5.23	
14mm	190	30.12	6.70	28.10	9.33	13.14	4.67	
15mm	198	32.20	7.61	30.31	9.74	14.04	5.42	
16mm	210	33.94	7.60	31.05	10.03	14.71	5.07	
17mm	225	35.72	8.08	32.50	10.66	15.43	5.27	
18mm	236	38.94	8.47	34.36	10.60	16.59	5.63	
19mm	247	40.56	8.72	36.34	11.12	17.26	6.07	
20mm	245	40.14	8.77	35.82	11.20	16.37	6.41	
21mm	289	45.08	9.34	42.61	13.30	19.22	6.270	
22mm	290	45.43	9.34	42.61	13.30	19.22	6.27	
24mm	334	52.17	11.00	49.25	14.53	22.36	7.33	
27mm	358	56.27	11.59	52.64	15.60	23.50	7.52	
30mm	401	61.90	12.70	57.28	17.34	26.31	8.56	
32mm	421	64.37	12.86	60.90	17.71	28.50	9.10	

- It adopts chrome-vanadium steel and 72 ratchet wheel design
- The surface is polished with mirror surface, rust-proof and beautiful
- 15° Angle offset, with direction button to switch forward reverse direction
- Professionally designed steering nuts with 5° action only
- Suitable for narrow space use and quick removal of long screw

Full Polished Adjustable Combination Spanner



Item NO.	Size		RMB
CL400708	8mm	10/100	
CL400709	9mm	10/150	
CL400710	10mm	10/100	
CL400711	11mm	10/100	
CL400712	12mm	10/100	
CL400713	13mm	10/100	
CL400714	14mm	10/100	
CL400715	15mm	10/100	
CL400716	16mm	10/100	
CL400717	17mm	10/100	
CL400718	18mm	10/100	
CL400719	19mm	10/100	
CL400722	22mm	10/50	
CL400724	24mm	6/48	



Size	L	D	C	B	A	H	T	W kg
8mm	145	21.30	5.50	20.50	7.90	9.96	3.60	
9mm	153	19.06	6.03	20.50	7.70	9.60	3.90	
10mm	163	21.30	5.82	22.00	7.68	10.14	3.90	
11mm	173	23.60	6.64	24.30	8.58	10.59	4.22	
12mm	185	26.61	7.30	25.26	9.02	11.60	4.50	
13mm	192	29.00	7.52	26.53	9.30	13.00	4.80	
14mm	188	29.25	7.05	28.18	9.24	13.15	4.54	
15mm	211	33.70	8.17	29.22	10.00	14.67	5.08	
16mm	220	35.73	8.78	30.75	10.54	15.33	5.96	
17mm	231	37.98	9.25	32.95	10.56	16.22	6.28	
18mm	243	40.55	9.03	34.85	11.00	17.59	6.66	
19mm	251	42.30	9.34	36.23	11.45	18.45	7.16	
22mm	281	48.10	10.20	42.34	13.66	20.01	6.88	
24mm	301	51.77	10.33	47.81	14.39	22.17	7.13	

- It adopts chrome-vanadium steel and 72 ratchet wheel design
- The surface is polished with mirror surface, rust-proof and beautiful
- Movable joint head, easy operation, professional design only 5° steering nut
- Suitable for narrow space use and quick removal of long screw

4pcs E Type Wrench




Item NO.	Size		RMB
CL404604	E6XE8mm E10XE12mm E14XE18mm E20XE24mm	4/40	

- Made of high quality vanadium steel, forged as a whole, with mirror processing
- Used for the removal and installation of E-nuts

Mirror Finish Bi-hexagonal Ring Ratchet Wrench



Item NO.	Size	🔧	RMB
CL402808	8-10mm	10/100	
CL400408	8-9mm	10/100	
CL400410	10-11mm	10/100	
CL400412	12-13mm	10/100	
CL400414	14-15mm	10/100	
CL400416	16-18mm	10/100	
CL400417	17-19mm	10/100	



Size	L	A	C	D	B	W kg
8-9mm	136	18.58	7.55	19.66	7.54	0.055
8-10mm	131	17.37	7.11	20.73	7.66	0.050
10-11mm	155	21.82	7.60	23.74	8.50	0.070
12-13mm	172	24.25	8.70	26.96	8.98	0.100
14-15mm	191	27.14	9.44	29.14	9.64	0.130
16-18mm	215	31.90	10.42	34.92	10.89	0.185
17-19mm	236	33.00	10.56	36.24	11.32	0.240

- It adopts chrome-vanadium steel and 72 ratchet wheel design
- The surface is polished with mirror surface, rust-proof and beautiful
- Easy operation, professional design only 5° steering nut
- Suitable for narrow space use and quick removal of long screw

The Movable Socket Combination Spanner



Item NO.	Size	🔧	📦	RMB
CL402908	8mm	300	0.05	
CL402909	9mm	300	0.06	
CL402910	10mm	250	0.07	
CL402911	11mm	200	0.10	
CL402912	12mm	200	0.11	
CL402913	13mm	160	0.13	
CL402914	14mm	160	0.18	
CL402915	15mm	125	0.19	
CL402916	16mm	100	0.19	
CL402917	17mm	100	0.22	
CL402918	18mm	75	0.29	
CL402919	19mm	80	0.30	
CL402922	22mm	50	0.42	

- Cr-V forging and integral heat treatment
- The surface is treated with mirror chrome plating, beautiful and durable
- 25% longer than the average length of traditional spanner, more energy saving
- Used for automobile and machinery assembly and disassembly.
- Thin-walled sleeve and dual-use spanner make it easy to use

The Movable Double Head Socket Spanner



Item NO.	Size	🔧	📦	RMB
CL403001	8X9mm	400	0.77	
CL403002	8X10mm	200	0.78	
CL403003	10X11mm	200	0.12	
CL403004	10X12mm	150	0.13	
CL403005	12X13mm	125	0.17	
CL403006	12X14mm	100	0.18	
CL403007	14X15mm	100	0.24	
CL403008	14X17mm	80	0.24	
CL403009	16X17mm	75	0.29	
CL403010	17X19mm	80	0.32	
CL403011	18X19mm	80	0.39	
CL403012	20X22mm	40	0.54	

- Cr-V forging and integral heat treatment
- The surface is treated with mirror chrome plating, beautiful and durable
- 25% longer than the average length of traditional spanner, more energy saving
- Used for automobile and machinery assembly and disassembly
- Thin wall sleeve, easy to use

Universal Wrench



Item NO.	Size	🔧	📦	RMB
CL404701	2PCS	6/36	0.62	

- Double head specification: 9-14, 15-22mm, single head specification: 23-32mm;
- Made of high quality alloy steel forged by integral heat treatment;
- Easy to use, save wrench space, two-color handle, comfortable to use.



Open-End Knock Wrench



Item NO.	Size	🔧	📦	RMB
CL410124	24mm	50	0.25	
CL410127	27mm	40	0.43	
CL410130	30mm	40	0.58	
CL410132	32mm	40	0.59	
CL410134	34mm	20	0.67	
CL410136	36mm	20	0.75	
CL410141	41mm	24	1.06	
CL410146	46mm	21	1.29	
CL410150	50mm	10	1.49	
CL410155	55mm	10	1.69	
CL410160	60mm	10	2.13	
CL410165	65mm	10	2.50	
CL410170	70mm	5	3.51	
CL410175	75mm	5	3.89	
CL410180	80mm	6	3.65	
CL410185	85mm	6	4.15	
CL410190	90mm	5	4.45	
CL410195	95mm	5	5.12	

- Forged with high quality alloy steel, thick and durable
- The surface is treated by electrophoresis, delicate and beautiful
- This product is an industrial grade tool

Single-head Open End Knock Wrench



Item NO.	Size	🔧	📦	RMB
CL410324	24mm	50/件	0.24	
CL410327	27mm	50/件	0.31	
CL410330	30mm	50/件	0.45	
CL410332	32mm	50/件	0.43	
CL410334	34mm	40/件	0.64	
CL410336	36mm	40/件	0.65	
CL410341	41mm	20/件	1.12	
CL410346	46mm	20/件	1.32	
CL410350	50mm	10/件	1.50	
CL410355	55mm	20/件	1.43	
CL410360	60mm	10/件	2.42	
CL410365	65mm	10/件	2.35	
CL410370	70mm	5/件	3.11	
CL410375	75mm	5/件	3.11	

- Forged with high quality alloy steel, thick and durable
- The surface is blackened, delicate and beautiful
- Safety hole is designed for knocking end, which can be used for hanging wire, string, etc
- This product is an industrial grade tool

Single-head Ring Knock Wrench



Item NO.	Size	🔧	📦	RMB
CL410224	24mm	50	0.27	
CL410227	27mm	65	0.38	
CL410230	30mm	40	0.58	
CL410232	32mm	40	0.59	
CL410234	34mm	32	0.67	
CL410236	36mm	35	0.75	
CL410241	41mm	24	1.06	
CL410246	46mm	21	1.29	
CL410250	50mm	18	1.49	
CL410255	55mm	16	1.69	
CL410260	60mm	10	2.13	
CL410265	65mm	10	2.50	
CL410270	70mm	5	3.51	
CL410275	75mm	6	3.89	
CL410280	80mm	6	3.66	
CL410285	85mm	6	4.15	
CL410290	90mm	5	4.82	
CL410295	95mm	5	4.62	
CL410200	100mm	1		
CL410205	105mm	3		
CL410210	110mm	1		
CL410215	115mm	1		
CL410220	120mm	1		

- Forged with high quality alloy steel, thick and durable
- The surface is treated by electrophoresis, delicate and beautiful
- This product is an industrial grade tool

Single-head Ring Wrench



Item NO.	Size	🔧	📦	RMB
CL410424	24mm	50	0.32	
CL410427	27mm	40	0.39	
CL410430	30mm	40	0.60	
CL410432	32mm	40	0.64	
CL410434	34mm	40	0.58	
CL410436	36mm	40	0.70	
CL410441	41mm	20	1.15	
CL410446	46mm	20	1.39	
CL410450	50mm	10	1.34	
CL410455	55mm	10	1.83	
CL410460	60mm	10	1.72	
CL410465	65mm	10	1.98	
CL410470	70mm	5	2.34	
CL410475	75mm	5	2.77	

- Forged with high quality alloy steel, thick and durable
- The surface is blackened, delicate and beautiful
- This product is an industrial grade tool

Crescent Wrench




Item NO.	Size			RMB
CL410501	22-26mm		0.06	
CL410502	28-32mm		0.07	
CL410503	34-36mm		0.08	
CL410504	38-42mm		0.11	
CL410505	45-52mm		0.14	
CL410506	55-62mm		0.16	
CL410507	68-72mm		0.27	
CL410508	78-85mm		0.35	
CL410509	90-95mm		0.49	
CL410510	100-110mm		0.64	
CL410511	115-130mm		0.80	
CL410512	135-145mm		0.93	
CL410513	150-160mm		1.60	
CL410514	165-170mm		1.50	
CL410516	200-220mm			
CL410517	220-240mm			

- Made of special steel, tempered, hardened and rustproof by electrophoresis
- for round nuts according to DIN1084 and DIN981
- For fastening or disassembling round nuts on machine tools, vehicles and mechanical equipment



Single Ball Hex Key



Item NO.	Size	L(mm)	B(mm)			RMB
CL401701	1.5mm	92	16	12/96/1920	0.01	
CL401702	2mm	102	17	12/96/1920	0.01	
CL401725	2.5mm	104	21	12/96/1920	0.01	
CL401703	3mm	128	23	12/96/1920	0.01	
CL401704	4mm	146	27	10/70/1050	0.02	
CL401705	5mm	162	32	8/56/560	0.03	
CL401706	6mm	185	37	6/36/360	0.05	
CL401707	7mm	183	54	8/48/480	0.08	
CL401708	8mm	205	46	4/24/240	0.10	
CL401709	9mm	217	47	4/24/240	0.14	
CL401710	10mm	229	48	3/15/120	0.18	
CL401711	11mm	235	58	12/72	0.18	
CL401712	12mm	245	60	12/72	0.27	
CL401713	13mm	265	66	12/72	0.35	
CL401714	14mm	273	68	12/72	0.42	
CL401716	16mm	276	77	12/48	0.55	
CL401717	17mm	315	83	12/48	0.70	
CL401718	18mm	322	85	8/48	0.81	
CL401719	19mm	335	87	8/48	0.94	
CL401720	20mm	330	91	24	1.03	
CL401721	21mm	355	93	24	1.19	
CL401722	22mm	360	98	24	1.34	
CL401724	24mm	425	105	24	1.87	
CL401727	27mm	460	115	8	2.56	
CL401730	30mm	480	120	6	3.28	
CL401732	32mm	505	130	6	3.95	
CL401734	34mm	530	140	6	4.65	
CL401736	36mm	580	145	6	5.68	

- Made of high quality chromium-vanadium steel with integral heat treatment
- The tail ball head is designed for removing and fastening hexagon socket bolts
- Fine sand nickel surface treatment, beautiful and wear-resistant, spherical wrench can be used at a 25 degree tilt



VDE
绝缘




Dual Color Handle Cane Type Ball Head Hex Key



Item NO.	Size	Entire length	Rod length	Head length			RMB
CL407525	2.5mm	137mm	98mm	85mm	20/400	0.03	
CL407502	2mm	137mm	98mm	85mm	20/400	0.03	
CL407503	3mm	137mm	98mm	85mm	20/400	0.03	
CL407504	4mm	184mm	142mm	94mm	16/320	0.07	
CL407505	5mm	185mm	144mm	92mm	16/320	0.07	
CL407506	6mm	198mm	158mm	95mm	12/240	0.07	
CL407508	8mm	255mm	200mm	126mm	12/120	0.20	
CL407510	10mm	256mm	200mm	130mm	12/120	0.28	

- Made of high-quality chromium vanadium steel, with overall heat treatment.
- The tail end ball head design can be tilted 25 degrees for use, used for disassembling and tightening internal hexagonal bolts.
- Designed according to ergonomics, the handle is comfortable to grip and effectively prevents slipping.


Cane Type Ball Head Hex Key



Item NO.	Size	L(mm)	B(mm)	A(mm)	D(mm)			RMB
CL404002	2mm	145	90	14	92	100/400	0.02	
CL404025	2.5mm	148	90	13	93	100/400	0.03	
CL404003	3mm	154	90	13	99	20/400	0.03	
CL404004	4mm	156	90	13	101	100/500	0.04	
CL404005	5mm	215	112	16	147	20/200	0.08	
CL404006	6mm	215	110	15	147	20/200	0.09	
CL404007	7mm	208	92	17	150	20/100	0.11	
CL404008	8mm	260	112	17	193	20/100	0.16	
CL404010	10mm	275	112	17	196	20/100	0.27	

- Made of high quality chromium-vanadium steel with integral heat treatment
- The tail ball head is designed for removing and fastening hexagon socket bolts
- Chrome plated surface, beautiful and wear-resistant, spherical wrench can be used at a 25 degree tilt
- L type wrench is comfortable to hold and effective to prevent slip


Cane Type Ball Head Hex Key



Item NO.	Size	L(mm)	B(mm)	A(mm)	D(mm)			RMB
CL406603	3X75mm	101	85	14	76	10/200	0.03	
CL406604	4X100mm	125	86	16	100	10/200	0.04	
CL406605	5X125mm	160	116	17	125	10/200	0.09	
CL406606	6X150mm	186	116	16	150	10/100	0.11	
CL406608	8X175mm	214	120	18	176	10/100	0.16	

- Made of 40Cr steel with integral heat treatment
- The tail ball head is designed for removing and fastening hexagon socket bolts
- Fine sand nickel surface treatment, beautiful and wear-resistant, spherical wrench can be used at a 25 degree tilt

Torx Wrench Mirror Cane Type Ball Head Hex Key



Item NO.	Size	L(mm)	B(mm)	A(mm)	D(mm)			RMB
CL404410	T10	146	70	14	100	20/400	0.02	
CL404415	T15	146	70	14	100	20/400	0.03	
CL404420	T20	150	70	15	102	20/400	0.03	
CL404425	T25	150	70	14	105	20/400	0.04	
CL404427	T27	213	90	16	153	20/200	0.07	
CL404430	T30	210	92	17	150	20/200	0.08	
CL404440	T40	212	92	17	150	20/100	0.10	
CL404445	T45	275	112	17	195	20/100	0.18	
CL404450	T50	280	112	16	197	20/100	0.21	

- Meet CAMCAR original factory standard manufacturing requirements
- Made of high quality chromium-vanadium steel with integral heat treatment
- Used to remove and tighten TORX star bolts
- Chrome plated surface, beautiful and wear-resistant
- L type wrench is comfortable to hold and effective to prevent slip

G17 Type 9pcs Mat Finish Ball head Hex Key Set



Item NO.	Size	🔧	📏	RMB
CL406502	medium	12 / 60	0.38	
CL406503	Lengthen	12 / 60	0.46	

- Made of 40Cr steel with integral heat treatment
- The tail ball head is designed for removing and fastening hexagon socket bolts
- Fine sand nickel surface treatment, beautiful and wear-resistant, spherical wrench can be used at a 25 degree tilt
- Configuration: 1.5 2 2.5 3 4 5 6 8 10

9pcs Mat Finish Star Type Hex Key Set



Item NO.	Size	🔧	📏	RMB
CL402001	normal	10/50	0.29	
CL402002	medium	10/50	0.36	
CL402003	Lengthen	10/50	0.46	

- Meet CAMCAR original factory standard manufacturing requirements
- Made of high quality 6150 chrome-vanadium steel with integral heat treatment
- Used to remove and tighten TORX star bolts
- Fine sand nickel butyl surface treatment, beautiful and wear-resistant
- Configuration: T10 T15 T20 T25 T27 T30 T40 T45 T50

G17 Mat Finish Star Type Hex Key Set



Item NO.	Size	🔧	📏	RMB
CL406512	medium	10/60		
CL406513	Lengthen	10/60		

- Made of 40Cr steel and subjected to overall heat treatment.
- Fine sand nickel surface treatment, beautiful and wear-resistant, with complete size and convenient use.
- Used for disassembling and tightening inner star bolts.
- Configuration: T10 T15 T20 T25 T27 T30 T40 T45 T50

9pcs Mirror Finish Ball Hex Key Set



Item NO.	Size	🔧	📏	RMB
CL402101	normal	10/50	0.27	
CL402102	medium	10/50	0.39	
CL402103	Lengthen	10/50	0.45	

- Made of high quality 6150 chrome-vanadium steel with integral heat treatment
- Used to remove and tighten hexagon socket bolts
- Chrome plated surface, beautiful and wear-resistant
- The ball head can be used at a 25 degree tilt
- Configuration: 1.5 2 2.5 3 4 5 6 8 10

9pcs Mat Finish Ball Hex Key Set



Item NO.	Size	🔧	📏	RMB
CL401901	normal	10/50		
CL401902	medium	10/50		
CL403801	medium (British system)	10/50		
CL401903	Lengthen	10/50	0.48	

- Made of high quality 6150 chrome-vanadium steel with integral heat treatment
- The tail ball head is designed for removing and fastening hexagon socket bolts
- Fine sand nickel surface treatment, beautiful and wear-resistant, spherical wrench can be used at a 25 degree tilt
- Configuration: 1.5 2 2.5 3 4 5 6 8 10



9pcs Mirror Finish Star Type Hex Key Set



Item NO.	Size	Icon	Weight	RMB
CL402013	Lengthen	10/60	0.45	

- Meet CAMCAR original factory standard manufacturing requirements
- Made of high quality 6150 chrome-vanadium steel with integral heat treatment
- Used to remove and tighten TORX star bolts
- Chrome plated surface, beautiful and wear-resistant
- Configuration: T10 T15 T20 T25 T27 T30 T40 T45 T50

9pcs Bronze Ball Hex Key Set



Item NO.	Size	Icon	Weight	RMB
CL402202	medium	10/50	0.40	
CL402203	Lengthen	10/50	0.49	

- Comply with DIN 2936 standard manufacturing requirements
- Made of S2 material with integral heat treatment
- The tail ball head is designed for removing and fastening hexagon socket bolts
- Bronze surface treatment, beautiful and wear-resistant, spherical wrench can be used at a 25 degree tilt
- Configuration: 1.5 2 2.5 3 4 5 6 8 10

13pcs Mat Finish Ball Hex Key Set



Item NO.	Size	Icon	Weight	RMB
CL407013	13PCS	12/48	0.51	

- Made of 6150 chromium molybdenum steel with integral heat treatment
- The tail ball head is designed for removing and fastening hexagon socket bolts
- Fine sand nickel surface treatment, beautiful and wear-resistant, spherical wrench can be used at a 25 degree tilt
- Configuration: 1.2 1.5 2 2.5 3 4 4.5 5 5.5 6 7 8 11

8pcs Folding type Flat Type Hex Key Set



Item NO.	Size	Icon	Weight	RMB
CL406701	8PCS	12/60	0.20	

- Made of 6150 chromium-vanadium steel with integral heat treatment
- Folding handle is comfortable to hold and effective to prevent slip
- Used to remove and tighten hexagon socket bolts
- Fine sand nickel butyl surface treatment, beautiful and wear-resistant
- Configuration: 1.5 2 2.5 3 4 5 6 8

9pcs Black Finish Flat Hex Key Set



Item NO.	Size	Icon	Weight	RMB
CL402212	medium	10/50	0.37	

- Made of high quality chromium-vanadium steel with integral heat treatment
- Used to remove and tighten hexagon socket bolts
- Black surface treatment, beautiful and wear-resistant
- Configuration: 1.5 2 2.5 3 4 5 6 8 10

8pcs Folding type Star Type Hex Key Set





Item NO.	Size	Icon	Weight	RMB
CL406702	8PCS	12/60	0.19	

- Meet CAMCAR original factory standard manufacturing requirements
- Made of 6150 chromium-vanadium steel with integral heat treatment
- Used to remove and tighten TORX star bolts
- Fine sand nickel butyl surface treatment, beautiful and wear-resistant
- Folding handle is comfortable to hold and effective to prevent slip
- Configuration: T9 T10 T15 T20 T25 T27 T30 T40

SCREWDRIVER

A collection of various screwdrivers is arranged on a dark, reflective surface. The screwdrivers have green and silver handles. Some have long, thin shafts, while others have shorter, thicker shafts. The bits are of different types, including Phillips, flathead, and Torx. One screwdriver has a green handle with a black grip section. Another has a green handle with a silver grip section. A third has a green handle with a silver grip section. A fourth has a green handle with a silver grip section. A fifth has a green handle with a silver grip section. A sixth has a green handle with a silver grip section. A seventh has a green handle with a silver grip section. A eighth has a green handle with a silver grip section. A ninth has a green handle with a silver grip section. A tenth has a green handle with a silver grip section. A eleventh has a green handle with a silver grip section. A twelfth has a green handle with a silver grip section. A thirteenth has a green handle with a silver grip section. A fourteenth has a green handle with a silver grip section. A fifteenth has a green handle with a silver grip section. A sixteenth has a green handle with a silver grip section. A seventeenth has a green handle with a silver grip section. An eighteenth has a green handle with a silver grip section. A nineteenth has a green handle with a silver grip section. A twentieth has a green handle with a silver grip section.


B Type Screw Driver(-)

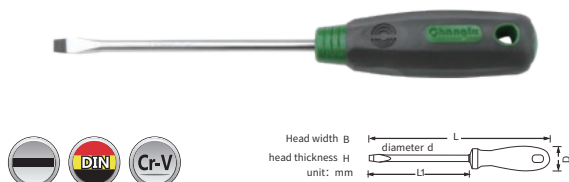

Item NO.	Size	L1	L	d	H	B	D			RMB
CL509631	3X75	75	155	3	0.60	2.98	24.53	24/360	0.03	
CL509632	3X100	103	182	3	0.60	7.99	24.84	24/360	0.04	
CL509634	3X150	152	230	3	0.60	2.91	24.84	24/360	0.04	
CL509635	3X200	202	282	3	0.60	3.36	24.79	24/360	0.04	
CL509651	5X75	78	171	5	1.00	5.33	28.89	12/180	0.06	
CL509652	5X100	101	195	5	1.00	5.43	28.97	12/180	0.06	
CL509654	5X150	151	245	5	1.00	5.36	28.90	12/180	0.07	
CL509655	5X200	201	295	5	1.00	5.37	28.90	12/180	0.08	
CL509657	5X300	301	395	5	1.00	5.45	28.83	12/180	0.09	
CL509662	6X100	101	207	6	1.00	6.44	32.80	12/180	0.09	
CL509663	6X125	127	234	6	1.00	6.20	32.85	12/180	0.10	
CL509664	6X150	152	258	6	1.10	6.26	32.88	12/180	0.11	
CL509665	6X200	202	306	6	1.10	6.35	32.76	12/180	0.11	
CL509666	6X250	254	360	6	1.10	6.33	32.93	12/180	0.13	
CL509667	6X300	301	408	6	1.10	6.43	32.80	12/180	0.13	

- Made of chromium-vanadium steel, the tool bar is hardened and heat-treated, with strong toughness and large torsion force.
- Reasonable handle design and comfortable grip.


T Type Screw Driver(-)

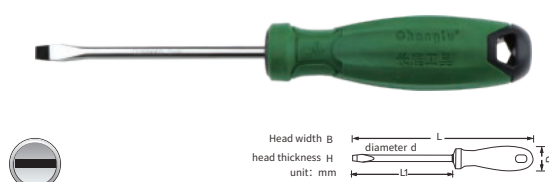

Item NO.	Size	L1	L	d	H	B	D			RMB
CL510031	3X75	76	163	3	0.60	3.05	24.40	24/480	0.04	
CL510042	4X100	101	187	4	0.80	4.00	24.18	16/320	0.04	
CL510052	5X100	101	204	5	1.05	5.39	29.12	16/320	0.07	
CL510062	6X100	102	216	6	1.20	6.43	32.77	12/240	0.10	
CL510063	6X125	127	242	6	1.20	6.44	32.42	12/240	0.10	
CL510064	6X150	151	265	6	1.19	6.24	32.22	12/240	0.11	
CL510065	6X200	201	315	6	1.25	6.27	32.39	12/240	0.12	

- Made of chromium-vanadium steel, the tool bar is hardened and heat-treated, with strong toughness and large torsion force.
- Reasonable handle design and comfortable grip.


B Type Screw Driver(+)



Item NO.	Size	L1	L	d	D			RMB
CL509731	3X75	79	159	3	24.80	24/360	0.03	
CL509732	3X100	100	180	3	24.69	24/360	0.04	
CL509734	3X150	152	230	3	24.78	24/360	0.04	
CL509735	3X200	201	280	3	24.78	24/360	0.04	
CL509751	5X75	79	172	5	28.74	12/180	0.06	
CL509752	5X100	101	195	5	29.00	12/180	0.07	
CL509754	5X150	151	245	5	28.90	12/180	0.07	
CL509755	5X200	202	295	5	28.89	12/180	0.08	
CL509757	5X300	301	395	5	28.88	12/180	0.09	
CL509762	6X100	102	208	6	32.92	12/180	0.09	
CL509763	6X125	126	232	6	32.64	12/180	0.10	
CL509764	6X150	152	259	6	33.00	12/180	0.10	
CL509765	6X200	202	306	6	32.79	12/180	0.11	
CL509766	6X250	253	360	6	32.79	12/180	0.12	
CL509767	6X300	301	407	6	32.80	12/180	0.13	

- Made of chromium-vanadium steel, the tool bar is hardened and heat-treated, with strong toughness and large torsion force.
- Reasonable handle design and comfortable grip.


B Type Screw Driver(+)



Item NO.	Size	L1	L	d	D			RMB
CL510131	3X75	77	164	3	24.24	24/480	0.04	
CL510142	4X100	101	187	4	24.16	16/320	0.04	
CL510152	5X100	102	205	5	28.66	16/320	0.70	
CL510162	6X100	101	218	6	32.62	12/240	0.10	
CL510163	6X125	127	241	6	32.28	12/240	0.10	
CL510164	6X150	152	264	6	32.35	12/240	0.11	
CL510165	6X200	202	316	6	32.39	12/240	0.12	

- Made of chromium-vanadium steel, the tool bar is hardened and heat-treated, with strong toughness and large torsion force.
- Reasonable handle design and comfortable grip.


Color Bar Handle Screw Driver(-)



Item NO.	Size	L1	L			RMB
CL504731	3x75	75	135	24/432	0.02	
CL504732	3x100	99	158	24/576	0.02	
CL504733	3x150	150	209	24/576	0.03	
CL504734	3x200	200	261	24/576	0.06	
CL504751	5x75	75	164	24/288	0.06	
CL504752	5x100	100	190	24/288	0.06	
CL504753	5x150	151	240	24/288	0.07	
CL504754	5x200	201	288	12/480	0.07	
CL504755	5x250	251	341	12/480	0.07	
CL504761	6x38	41	90	36/432	0.04	
CL504762	6x100	101	200	24/288	0.08	
CL504763	6x150	150	250	12/288	0.09	
CL504764	6x200	201	301	24/288	0.10	
CL504765	6x250	250	348	12/144	0.12	
CL504766	6x300	300	400	12/192	0.13	

- Made of chromium-vanadium steel with specially coated cutter shank and hardened heat treatment
- Strong torsion support of knife rod, durable longer, color stripe and


Anti-oil Screwdriver(-)



Item NO.	Size	L1	L	d	H	B	D			RMB
CL505301	3X75	78	164	3	0.59	3.41	23.43	24/288	0.04	
CL505302	3X100	101	185	3	0.56	3.36	23.65	24/288	0.03	
CL505303	3X200	203	288	3	0.52	3.24	23.07	24/288	0.04	
CL505304	5X75	80	183	5	0.90	5.28	28.56	12/120	0.06	
CL505305	5X100	104	202	5	0.98	5.38	30.88	12/120	0.07	
CL505316	5X125	127	230	5	0.86	5.04	28.42	12/120	0.07	
CL505317	5X150	153	258	5	0.97	5.33	28.54	12/120	0.07	
CL505306	5X200	205	307	5	1.03	5.18	28.70	12/120	0.08	
CL505307	5X250	252	355	5	0.91	5.61	27.99	12/120	0.09	
CL505308	5X300	300	404	5	1.00	5.44	27.85	12/120	0.10	
CL505315	6X38	39	100	6	0.94	6.55	28.46	24/288	0.04	
CL505309	6X100	100	215	6	1.00	6.32	32.80	12/120	0.09	
CL505310	6X125	126	243	6	1.10	6.06	32.39	12/120	0.09	
CL505311	6X150	151	268	6	1.08	6.19	32.26	12/120	0.10	
CL505312	6X200	200	316	6	1.10	6.40	32.62	12/120	0.11	
CL505313	6X250	253	370	6	1.11	6.42	32.88	12/120	0.13	
CL505314	6X300	302	420	6	1.00	6.36	33.20	12/120	0.13	

- Made of chromium-vanadium steel with specially coated cutter shank and hardened heat treatment
- Strong torsion support of knife bar, durable longer, monochrome oil resistant handle


Color Bar Handle Screw Driver(+)



Item NO.	Size	L1	L			RMB
CL504831	3x75	75	135	24/432	0.02	
CL504832	3x100	99	158	24/576	0.02	
CL504833	3x150	150	209	24/576	0.03	
CL504834	3x200	200	261	24/576	0.06	
CL504851	5x75	75	164	24/288	0.06	
CL504852	5x100	100	190	24/288	0.06	
CL504853	5x150	151	240	24/288	0.07	
CL504854	5x200	201	288	12/480	0.07	
CL504855	5x250	251	341	12/480	0.07	
CL504861	6x38	41	90	36/432	0.04	
CL504862	6x100	101	200	24/288	0.08	
CL504863	6x150	150	250	12/288	0.09	
CL504864	6x200	201	301	24/288	0.10	
CL504865	6x250	250	348	12/144	0.12	
CL504866	6x300	300	400	12/192	0.13	

- Made of chromium-vanadium steel with specially coated cutter shank and hardened heat treatment
- Strong torsion support of knife rod, durable longer, color stripe and

Anti-oil Screwdriver(+)




Item NO.	Size	L1	L	d	D			RMB
CL505401	3X75	78	163	3	23.71	24/288	0.03	
CL505402	3X100	103	180	3	22.93	24/288	0.03	
CL505403	3X200	202	285	3	23.00	24/288	0.04	
CL505404	5X75	80	180	5	30.88	12/120	0.06	
CL505405	5X100	103	206	5	28.46	12/120	0.06	
CL505416	5X125	127	230	5	30.86	12/120	0.08	
CL505417	5X150	129	230	5	31.30	12/120	0.07	
CL505406	5X200	153	253	5	31.29	12/120	0.08	
CL505407	5X250	255	355	5	28.44	12/120	0.09	
CL505408	5X300	305	407	5	27.85	12/120	0.10	
CL505415	6X38	39	101	6	28.74	24/288	0.04	
CL505409	6X100	100	216	6	32.35	12/120	0.09	
CL505410	6X125	126	241	6	32.25	12/120	0.09	
CL505411	6X150	152	267	6	32.57	12/120	0.10	
CL505412	6X200	203	316	6	33.76	12/120	0.11	
CL505413	6X250	253	368	6	32.88	12/120	0.12	
CL505414	6X300	304	420	6	33.33	12/120	0.13	

- Made of chromium-vanadium steel with specially coated cutter shank and hardened heat treatment
- Strong torsion support of knife bar, durable longer, monochrome oil resistant handle




Anti-oil Konck Screwdriver (-)



Item NO.	Size	L1	L	d	H	B	D			RMB
CL505501	6X100	104	215	6	1.15	6.35	32.89	12/120	0.12	
CL505502	6X150	151	264	6	1.15	6.35	32.48	12/120	0.14	
CL505503	6X200	200	312	6	0.95	6.41	32.18	12/120	0.16	
CL505504	8X200	205	315	8	1.60	7.92	32.17	12/72	0.20	
CL505505	8X250	254	366	8	1.34	8.08	33.18	12/72	0.22	
CL505506	8X300	303	415	8	1.45	7.79	32.94	12/72	0.24	

- Made of chromium-vanadium steel with specially coated cutter shank and hardened heat treatment
- Strong torsion support of knife bar, durable longer, monochrome oil resistant handle
- The back end of the knife handle can be used for knocking


A Type Double Color Screw Drive(-)



Item NO.	Size	L1	L			RMB
CL506101	3X75	75	157	24/216	0.03	
CL506102	3X100	100	181	24/288	0.03	
CL506104	5X75	75	177	12/120	0.06	
CL506105	5X100	100	200	12/120	0.07	
CL506106	5X150	150	251	12/120	0.08	
CL506115	6X38	38	94	24/288	0.09	
CL506109	6X100			12/120	0.09	
CL506110	6X125	125	236	12/120	0.10	
CL506111	6X150	150	260	12/120	0.11	
CL506112	6X200	200	311	12/120	0.12	
CL506113	6X250	250	359	12/120	0.04	

- Made of chromium-vanadium steel with specially coated cutter shank and hardened heat treatment
- Strong torsion support of knife rod toughness, longer durability
- The handle is made of PP+TPR material and double-color injection molding, which makes it feel comfortable


Anti-oil Konck Screwdriver(+)



Item NO.	Size	L1	L	d	D			RMB
CL505601	6X100	104	217	6	32.01	12/120	0.13	
CL505602	6X150	154	265	6	32.00	12/120	0.14	
CL505603	6X200	203	315	6	33.28	12/120	0.15	
CL505604	8X200	203	315	8	32.80	12/72	0.20	
CL505605	8X250	255	367	8	32.30	12/72	0.22	
CL505606	8X300	300	415	8	30.77	12/72	0.25	

- Made of chromium-vanadium steel with specially coated cutter shank and hardened heat treatment
- Strong torsion support of knife bar, durable longer, monochrome oil resistant handle
- The back end of the knife handle can be used for knocking

A Type Double Color Screw Drive(+)



Item NO.	Size	L1	L			RMB
CL506201	3X75	75	157	24/288	0.03	
CL506202	3X100	100	181	24/288	0.03	
CL506204	5X75	75	177	12/120	0.06	
CL506205	5X100	100	200	12/120	0.07	
CL506206	5X150	150	251	12/120	0.08	
CL506215	6X38	38	94	12/120	0.09	
CL506209	6X100			12/144	0.09	
CL506210	6X125	125	236	12/144	0.10	
CL506211	6X150	150	260	12/144	0.11	
CL506212	6X200	200	311	12/120	0.12	
CL506213	6X250	250	359	12/120	0.04	

- Made of chromium-vanadium steel with specially coated cutter shank and hardened heat treatment
- Strong torsion support of knife rod toughness, longer durability
- The handle is made of PP+TPR material and double-color injection molding, which makes it feel comfortable

A Type Double Color KNOCK Screw Drive(-)



Item NO.	Size	12/72	0.25	RMB
CL506305	8X250			

- Made of chromium-vanadium steel with specially coated cutter shank and hardened heat treatment
- Strong torsion support of knife rod toughness, longer durability
- The back end of the knife handle can be used for knocking
- The handle is made of PP+TPR material and double-color injection molding, which makes it feel comfortable

Double Color Screw Drive(-)



Item NO.	Size	12/240	0.07	RMB
CL501101	5X75			
CL501102	6X100			
CL501103	6X150			
CL501104	8X200			

- Made of chromium-vanadium steel with specially coated cutter shank and hardened heat treatment
- Strong torsion support of knife rod, longer durability, dual color oil resistant handle
- The tool bar is designed to penetrate, and the strengthened tool bar can be struck

A Type Double Color KNOCK Screw Drive(+)



Item NO.	Size	12/72	0.24	RMB
CL506405	8X250			

- Made of chromium-vanadium steel with specially coated cutter shank and hardened heat treatment
- Strong torsion support of knife rod toughness, longer durability
- The back end of the knife handle can be used for knocking
- The handle is made of PP+TPR material and double-color injection molding, which makes it feel comfortable

Double Color Screw Drive(+)



Item NO.	Size	12/240	0.10	RMB
CL501201	5X75			
CL501202	6X100			
CL501203	6X150			
CL501204	8X200			

- Made of chromium-vanadium steel with specially coated cutter shank and hardened heat treatment
- Strong torsion support of knife rod, longer durability, dual color oil resistant handle
- The tool bar is designed to penetrate, and the strengthened tool bar can be struck



Double Color KONCK Screw Drive(-)



Item NO.	Size	12/144	0.12	RMB
CL500901	(6X100)4"			
CL500902	(6X150)6"			
CL500903	(8X200)8"			
CL500904	(8X250)10"			

- Made of chromium-vanadium steel with specially coated cutter shank and hardened heat treatment
- Strong torsion support of knife rod, longer durability, dual color oil resistant handle
- The back end of the knife handle can be used for knocking




Double Color KONCK Screw Drive(+)



Item NO.	Size	L1	L	d	H	B	D	RMB
CL501001	(6X100)4"	12/144	0.12					
CL501002	(6X150)6"	12/144	0.13					
CL501003	(8X200)8"	12/72	0.22					
CL501004	(8X250)10"	12/72	0.24					

- Made of chromium-vanadium steel with specially coated cutter shank and hardened heat treatment
- Strong torsion support of knife rod, longer durability, dual color oil resistant handle
- The back end of the knife handle can be used for knocking

Dual-color Handle KONCK Screwdriver (-)



Item NO.	Size	L1	L	d	H	B	D			RMB
CL510661	6X100	110	218	6	1.10	6.30	33.60	12/144	0.15	
CL510662	6X150	159	267	6	1.28	6.75	33.60	12/144	0.16	
CL510681	8X200	202	328	8	1.59	8.25	35.70	12/72	0.25	
CL510682	8X250	253	379	8	1.70	8.55	35.70	12/72	0.26	
CL510683	8X300	302	428	8	1.72	8.27	35.70	12/72	0.29	

- The blade is made of S2 material, which has high hardness, good toughness, and mirror treatment,
- Beautiful and durable, with a strong magnetic blade for easy use.
- Through the heart design, the back end of the knife handle can be knocked for use.
- The handle is made of PP+TPR material, with dual color injection molding, providing a comfortable feel.


Professional Handle KONCK Screwdriver(-)



Item NO.	Size	L1	L	d	H	B	D	RMB
CL509001	6X100	12/120	0.13					
CL509002	6X150	12/120	0.14					

- Made of chromium-vanadium steel with specially coated cutter shank and hardened heat treatment
- Strong torsion support of knife rod, longer durability, dual color oil resistant handle
- The back end of the knife handle can be used for knocking

Dual-color Handle KONCK Screwdriver (+)



Item NO.	Size	L1	L	d	H	B	D	RMB
CL510761	6X100	109	217	6	33.60	12/144	0.15	
CL510762	6X150	162	270	6	33.60	12/144	0.16	
CL510781	8X200	202	328	8	35.70	12/72	0.25	
CL510782	8X250	256	382	8	35.70	12/72	0.27	
CL510783	8X300	302	428	8	35.70	12/72	0.29	

- The blade is made of S2 material, which has high hardness, good toughness, and mirror treatment,
- Beautiful and durable, with a strong magnetic blade for easy use.
- Through the heart design, the back end of the knife handle can be knocked for use.
- The handle is made of PP+TPR material, with dual color injection molding, providing a comfortable feel.


Professional Handle KONCK Screwdriver(+)



Item NO.	Size	L1	L	d	H	B	D	RMB
CL509101	6X100	12/120	0.13					
CL509102	6X150	12/120	0.14					

- Made of chromium-vanadium steel with specially coated cutter shank and hardened heat treatment
- Strong torsion support of knife rod, longer durability, dual color oil resistant handle
- The back end of the knife handle can be used for knocking

Impact Resistant Crowbar With Rubber Handle(-)



Item NO.	Size	L1	L	d	H	B	D			RMB
CL304512	12mmX12"	316	480	12	2.22	12.37	31.75	4/36	0.60	
CL304514	12mmX14"	350	513	12	2.15	14.20	32.45	4/36	0.68	
CL304516	12mmX16"	405	565	12	2.25	14.05	31.88	4/36	0.69	
CL304524	12mmX24"	610	806	12.5	1.60	12.46	32.80	4/36	1.10	
CL304528	12.5mmX28"	708	905	12.5	2.00	12.85	33.75	4/36	1.21	

- Made of high quality chromium vanadium steel, hardened and heat treated
- Strong torsion support of knife bar toughness, can also be used as pry bar
- The back end of the knife handle can be knocked

Diaphanous Handle Impact Screwdriver (-)



Item NO.	Size	12/240	12/240	RMB
CL504561	6 X100	12/240	0.10	
CL504562	6 X150	12/240	0.14	
CL504581	8 X200	12/144	0.21	
CL504582	8 X250	12/144	0.24	
CL504583	8 X300	12/144	0.26	

- Made of chromium-vanadium steel, hardened and heat treated
- Strong torsion support of knife rod toughness, longer durability,
- The handle is made of transparent ABS injection molding with beautiful style
- Penetration design of the cutter head, and the reinforced cutter head can be struck

Combination Screw Driver



Item NO.	Size	12/288	0.05	RMB
CL501305	6 X 38mm	12/288	0.05	

- Made of chromium-vanadium steel, hardened and heat treated
- Double color oil resistant handle with one word and cross working head, which can be replaced quickly

Diaphanous Handle Impact Screwdriver (+)



Item NO.	Size	12/240	0.10	RMB
CL504661	6 X100	12/240	0.10	
CL504662	6 X150	12/240	0.11	
CL504681	8 X200	12/144	0.21	
CL504682	8 X250	12/144	0.24	
CL504683	8 X300	12/144	0.26	

- Made of chromium-vanadium steel, hardened and heat treated
- Strong torsion support of knife rod toughness, longer durability,
- The handle is made of transparent ABS injection molding with beautiful style
- Penetration design of the cutter head, and the reinforced cutter head can be struck

Retractable Dual-purpose Screwdriver



Item NO.	Size	12/120	0.12	RMB
CL501304		12/120	0.12	

- The handle is made of advanced elastomer (TPR) material, with anti-slip and comfortable grip.
- Not easy to fatigue and other characteristics, the tool bar hardened heat treatment, hardness and toughness to reach the best state
- High precision cutter head, closely matched with screws, telescopic batch rod, adjustable length

Advanced Combination Screw Driver



Item NO.	Size	6/60	0.12	RMB
CL501303	4"	6/60	0.12	

- Made of chromium-vanadium steel, hardened and heat treated
- Double color oil resistant handle with one word and cross working head, which can be replaced quickly

Double Purpose Screw Driver



Item NO.	Size	16/320		RMB
CL501306	4X100	16/320		

- Made of chromium-vanadium steel, hardened and heat treated
- One word and cross working head can be quickly replaced



Ratchet Type Telescopic Dual-purpose Screwdriver



Item NO.	Size	🔧	📏	RMB
CL501307	6X155mm	12/72		

- The blade is made of chromium vanadium steel material, with overall heat treatment, strong torque, and durability.
- Double head telescopic design, allowing for free extension of the tool holder length.
- Adopting a spiral ratchet design, turning the ratchet left and right can select the direction to twist the screw, which is convenient to use, time-saving, and labor-saving.
- The handle adopts ergonomic design, providing a comfortable grip.

Extended Socket Screwdriver



Item NO.	Size	🔧	📏	RMB
CL507306	6mm	12/144	0.12	
CL507307	7mm	12/144	0.12	
CL507308	8mm	12/144	0.11	
CL507310	10mm	12/144	0.12	
CL507313	13mm	12/144	0.14	

- The tool bar is made of high quality chromium vanadium steel, with overall quenching and high hardness
- Good toughness.The surface is coated with chrome and has good rust resistance
- Non-slip rubber handle, comfortable feel, longer durability

Anti-oil Handle Torx Screw Drive



Item NO.	Size	🔧	📏	RMB
CL505107	T8 Φ 3X75	12/144	0.03	
CL505109	T15 Φ 5X100	12/144	0.06	
CL505112	T30 Φ 6X150	12/144	0.09	
CL505113	T27 Φ 5X100	12/144	0.06	
CL505114	T40 Φ 8X100	12/144	0.12	

- Meet the manufacturing requirements of TorX-H standard of German CAMCAR factory
- The tool bar is made of chromium-molybdenum steel with integral heat treatment, high hardness and good toughness
- Ergonomic design environment-friendly two-color handle, excellent anti-oil, anti-fouling and anti-slip performance
- Comfortable feel, used to remove and install TORX-H anti-theft screw with center hole

B Type Torx Screw Drive



Item NO.	Size	🔧	📏	RMB
CL509808	T8 Φ 3X75	12/180		
CL509810	T10 Φ 5X150	12/180		
CL509815	T15 Φ 5X150	12/180		
CL509820	T20 Φ 5X150	12/180		
CL509825	T25 Φ 6X150	12/180		
CL509827	T27 Φ 6X150	12/180		
CL509830	T30 Φ 6X150	12/180		
CL510810	T10 Φ X5X300	12/180		
CL510815	T15 Φ X5X300	12/180		
CL510820	T20 Φ X5X300	12/180		
CL510825	T25 Φ X6X300	12/180		
CL510827	T27 Φ X6X300	12/180		
CL510830	T30 Φ X6X300	12/180		

- Meet the manufacturing requirements of TorX-H standard of German CAMCAR factory
- The tool bar is made of chromium vanadium steel, with integral heat treatment, high hardness and good toughness
- Ergonomic design environment-friendly two-color handle, excellent anti-oil, anti-fouling and anti-slip performance
- Comfortable feel, used to remove and install TORX-H anti-theft screw with center hole



Anti-oil Handle Sappner Type Screw Drive



Item NO.	Size	Weight	Volume	RMB
CL509201	5*100*U2.3	12/144	0.05	

- The tool bar is made of high quality chromium vanadium steel, with overall quenching and high hardness
- Good toughness.The surface is chrome plated with good rust resistance
- Non-slip two-color rubber handle, comfortable feel, longer durability

Anti-oil Handle Y Type Screw Drive



Item NO.	Size	Weight	Volume	RMB
CL509202	5*100*Y1	12/144	0.05	

- The tool bar is made of high quality chromium vanadium steel, with overall quenching and high hardness
- Special rotary 3-angle cutter head, good toughness, chrome plated surface, good rust resistance
- Non-slip two-color rubber handle, comfortable feel, longer durability

Anti-oil Handle Triangle Type Screw Drive



Item NO.	Size	Weight	Volume	RMB
CL509203	3*75*3.0	24/288	0.03	
CL509204	5*75*4.0	12/120	0.06	

- The tool bar is made of high quality chromium vanadium steel, with overall quenching and high hardness
- Special 3-angle cutter head, good toughness, chrome plated surface, good rust resistance
- Non-slip two-color rubber handle, comfortable feel, longer durability

23pcs Telecommunications Screwdriver Set




Item NO.	Size	Weight	Volume	RMB
CL503923	23PCS	10/40	0.03	

Configuration

T5,T6,T8,T9,T10,T15,T20,PH000,PH00,PH0,PH1,
PZ0,PZ1,H0.7,H0.9,H1.3,H2.0,H3.0,H4.0
Ø1.5, Ø2.0, Ø2.5, Ø3.0, Ø4.0

- Double color oil-resistant and non-slip injection molding with sleeve handle, with interchangeable batchhead
- It is the preferred tool combination for mobile phone and home

30pcs Telecommunications Maintenance Screwdriver Set

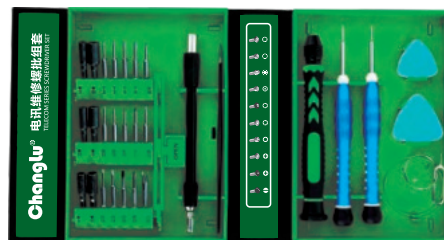

Material: Cr-V

● 3 ● 5.5 ● T2 ● T3 ● T5 ● T6 ● 0.8
● 3.5 ● 5 ● 1.0 ● 1.2 ● 1.5 ● 2.0 ● 1.2
● 4 ● 4.5 ● 1.0 ● 1.5 ● 2.0 ● 2.0 ● 2.6

Item NO.	Size	Weight	Volume	RMB
CL503930	30PCS	6/72	0.04	

- The tool bar is made of chromium vanadium steel, which is heat treated and has good strength and toughness
- Enhanced shank provides strong torsion support for high strength and longer durability
- This product is the preferred tool for mobile phone repair and family use



VDE
绝缘



38pcs Telecommunications Maintenance Screwdriver Set



A
Material: Cr-V

2.5 5.5 T2 T3 T4 T5 T6
 3 5 T7 T8 T9 T10 T15
 3.5 4.5 1.5 2.0 1.2 1.5 2.0
 4 PH2 2.3 0.8 1.2 2.0 2.6

B
Material: S2

2.5 5.5 T3 T4 T5 T6 T7
 3 5 1.2 1.5 2.0 3.0 0.8
 3.5 4.5 1.5 2.0 2.3 2.6 1.2
 4 PH2 0.9 1.5 2.0 3.0 2.0

Item NO.	Size			RMB
CL503138	38PCS A	6/72	0.04	
CL503938	38PCS B	6/72	0.04	

- Double color oil-resistant and non-slip injection molding with sleeve handle, with interchangeable batchhead
- It is the preferred tool combination for mobile phone and home

22pcs Telecommunications Screwdriver Set



Item NO.	Size			RMB
CL503122	22PCS	12/48		

Configuration

T5, T6, T7, T8, T9, T10, T15, T20
 PH000, PH00, PH0, PH1, PH2, U2.6, Δ 2.0
 ⊖ 1.0, ⊖ 1.5, ⊖ 2.0, ⊖ 3.0, ⊖ 4.0

- Double color oil-resistant and non-slip injection molding with sleeve handle, with interchangeable batchhead
- It is the preferred tool combination for mobile phone and home

7pcs Micro Line Screwdriver Set



Item NO.	Size			RMB
CL503907	7PCS	10/100		

- The blade is made of chromium vanadium steel material, with overall heat treatment, which is sturdy and durable.
- Knife hair black treatment, with strong magnetism, convenient to use.
- Black and green dual color handle, comfortable to grip and not prone to fatigue.
- Size configuration: One word: 1.5/2.0/2.5/3.0 Cross: PH000/PH00/PH0

30PCS Ratchet Wrench Bit & Socket Set



- 14piece set 6.35x25mm Cr-V First batch:
 - SL4-SL5mm PH1-PH2
 - T15-T20-T25 H4-H5-H6
 - U6 2.3
 - Y2
- 8piece 4x28mm Cr-V First batch:
 - SL1.2, SL2.0, PH1, PH2, T10, T15, H1.5, H2.0
- 6piece Sleeve:
 - 5mm-6mm-7mm-8mm-9mm-10mm
- 1piece Conversion head
- 1piece Ratchet handle

Item NO.	Size			RMB
CL509430	30PCS	12/48	0.38	

- Batch head made of chrome-vanadium alloy steel and non-slip two-color TPR wrap with ratchet handle
- Wide fan is used for household daily maintenance, such as house-hold appliances, baby toys, socket (head), lamps and lanterns, etc

29pcs Ratchet Wrench Bit & Socket Set



- 16piece set 6.35x25mm Cr-V First batch:
 - 3mm-4mm-5mm #0-#1-#2
 - #2 T10-T15-T20
 - H3-H4-H5 U6
 - 2.3 Y2
- 9piece Sleeve:
 - 5mm-6mm-7mm-8mm-9mm-10mm-11mm-12mm-13mm
- 1piece 60mm Magnetic rod
- 1piece Conversion head
- 1piece 1/4" T-shaped post
- 1piece Ratchet handle

Item NO.	Size			RMB
CL509429	29PCS	6/48	0.60	

- Wide fan is used for household daily maintenance, such as household appliances, baby toys, socket (head), lamps and lanterns, etc

25pcs Precision Screw Batch Set



Item NO.	Size	Weight	Volume	RMB
CL503925	25PCS	24/96		

Configuration details Star shaped T2 T3 T5 T6 T8 T9 T10 T15
Hexagonal 0.9, 1.5, 2.0, 2.5, 3.0, pentagonal 0.8, 1.2
Cross PH000 PH0 PH1 One word 1.5 2.0 2.5 3.0
Y-shaped 0.6 triangular 2.0


11pcs Dual Purpose Screwdriver Set



Item NO.	Size	Weight	Volume	RMB
CL504911	11PCS	20		

Configuration:
PH0-PH1 PH2-PH3 PZ1-PZ2 SL3-SL4 SL5.5-SL6.5
T10-T15 T20-T25 T30-T40 H3-H4 H5-H6

29pcs Telecommunications Screwdriver Set

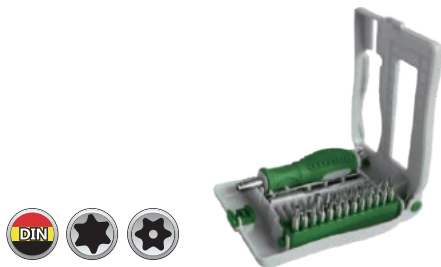

Item NO.	Size	Weight	Volume	RMB
CL503929	29PCS	10/60	0.02	52.95

Configuration T5,T6,T7,T8,T9,T10,T15,T20,PH000,PH00,PH0,PH1,
PZ0,PZ1,H0.7,H0.9,H1.3,H1.5,H2.0,H3.0,H4.0
Ø1.5, Ø2.0, Ø2.5, Ø3.0, Ø4.0

- Double color oil-resistant and non-slip injection molding with sleeve handle, with interchangeable batchhead
- It is the preferred tool combination for mobile phone and home

8pcs Industrial Grade Oil Resistant Screwdriver Set



Item NO.	Size	Weight	Volume	RMB
CL504908	6X150, 5X100, 3X75, 6X38 PH2X150, PH1X75, PH0X75, PH2X38	8	1.17	

- The shank is made of high quality chromium-vanadium steel, and the handle is made of double-color injection molding, anti-slip and anti-oil

2pcs B Type Screwdriver Set



Item NO.	Size	Weight	Volume	RMB
CL504902	2PCS	1/60		

- Made of chromium-vanadium steel, the tool bar is hardened and heat-treated, with strong toughness and large torsion force.
- Reasonable handle design and comfortable grip.

6pcs Industrial Grade Oil Resistant Screwdriver Set



Item NO.	Size	Weight	Volume	RMB
CL504906	6X150, 5X100, 3X75 PH2X150, PH1X75, PH0X75	8	0.91	

- The shank is made of high quality chromium-vanadium steel, and the handle is made of double-color injection molding, anti-slip and anti-oil



7pcs Color Bar Handle Screw Driver Set



Item NO.	Size	Weight	Price	RMB
CL504707	3X75, 5X75, 6X100, 6X150 PH0X75, PH1X75, PH2X100	10	0.52	

- The tool bar is made of chromium vanadium steel, which is heat treated and has good strength and toughness
- Enhanced shank provides strong torsion support for high strength and longer durability


10pcs Color Bar Handle Screw Driver Set



Item NO.	Size	Weight	Price	RMB
CL504710	3X75, 5X75, 6X100, 6X150, 6X38 PH0X75, PH2X100, PH1X75, PH2X150, PH2X38	10	0.69	

- The tool bar is made of chromium vanadium steel, which is heat treated and has good strength and toughness
- Enhanced shank provides strong torsion support for high strength and longer durability


1/4" Torx Points Screw Driver Socket



Item NO.	Size	L(mm)	A(mm)	Weight	Price	RMB
CL503508	T8	37	12	12	0.02	
CL503510	T10	37	12	12	0.02	
CL503515	T15	37	12	12	0.02	
CL503520	T20	37	12	12	0.02	
CL503525	T25	37	12	12	0.02	
CL503527	T27	37	12	12	0.02	
CL503530	T30	37	12	12	0.02	
CL503540	T40	37	12	12	0.02	

- The sleeve is forged with 50BV30 chromium-vanadium steel and chromium-plated mirror knurling
- Batch head is made of S2 alloy steel, with integral quenching, high hardness, large torque and not easy to break

1/4" 6pt Screw Driver Socket



Item NO.	Size	L(mm)	A(mm)	Weight	Price	RMB
CL503603	HW3	37	12	12	0.02	
CL503604	HW4	37	12	12	0.02	
CL503605	HW5	37	12	12	0.02	
CL503606	HW6	37	12	12	0.02	
CL503607	HW7	37	12	12	0.02	
CL503608	HW8	37	12	12	0.02	

- The sleeve is forged with 50BV30 chromium-vanadium steel and chromium-plated mirror knurling
- Batch head is made of S2 alloy steel, with integral quenching, high hardness, large torque and not easy to break



1/4" Screw Driver Socket (-)



Item NO.	Size	L(mm)	A(mm)			RMB
CL503304	FD4mm	37	12	12	0.02	
CL503305	FD5.5mm	37	12	12	0.02	
CL503307	FD7mm	37	12	12	0.02	

- The sleeve is forged with 50BV30 chromium-vanadium steel and chromium-plated mirror knurling
- Batch head is made of S2 alloy steel, with integral quenching, high hardness, large torque and not easy to break

1/4" Screw Driver Socket (+)



Item NO.	Size	L(mm)	A(mm)			RMB
CL503401	PH 1	37	12	12	0.02	
CL503402	PH 2	37	12	12	0.02	
CL503403	PH 3	37	12	12	0.02	

- The sleeve is forged with 50BV30 chromium-vanadium steel and chromium-plated mirror knurling
- Batch head is made of S2 alloy steel, with integral quenching, high hardness, large torque and not easy to break

1/4" Pozidriv Screw Driver Socket



Item NO.	Size	L(mm)	A(mm)			RMB
CL503701	PZ1	37	12	12	0.02	
CL503702	PZ2	37	12	12	0.02	
CL503703	PZ3	37	12	12	0.02	

- The sleeve is forged with 50BV30 chromium-vanadium steel and chromium-plated mirror knurling
- Batch head is made of S2 alloy steel, with integral quenching, high hardness, large torque and not easy to break

1/4" Torx Screw Driver Socket



Item NO.	Size	L(mm)	A(mm)			RMB
CL503210	T10	48	18	40/800		
CL503215	T15	48	18	30/600		
CL503220	T20	48	18	40/640		
CL503225	T25	48	18	40/640		
CL503227	T27	48	18	40/640		
CL503230	T30	48	18	10/300		
CL503240	T40	48	18	10/300		
CL503245	T45	48	18	10/300		
CL503250	T50	48	18	10/300		
CL503255	T55	48	18	10/300		
CL503260	T60	48	18	10/200		

- The sleeve is forged with 50BV30 chromium-vanadium steel and chromium-plated mirror knurling
- Batch head is made of S2 alloy steel, with integral quenching, high hardness, large torque and not easy to break

3/8" 6pt Screw Driver Socket




Item NO.	Size	L(mm)	A(mm)			RMB
CL503103	HW3	48	18	10/400		
CL503104	HW4	48	18	10/400		
CL503105	HW5	48	18	10/400		
CL503106	HW6	48	18	10/400		
CL503107	HW7	48	18	10/400		
CL503108	HW8	48	18	10/400		
CL503110	HW10	48	18	10/400		
CL503112	HW12	48	18	10/400		

- The sleeve is forged with 50BV30 chromium-vanadium steel and chromium-plated mirror knurling
- Batch head is made of S2 alloy steel, with integral quenching, high hardness, large torque and not easy to break




3/8" Screw Driver Socket (-)



Item NO.	Size	L(mm)	A(mm)			RMB
CL501901	FD5.5	48	18	10/300		
CL501902	FD6.5	48	18	10/300		
CL501903	FD8.0	48	18	10/300		
CL501904	FD4.0	48	18	10/300		
CL501905	FD10	48	18	10/300		
CL501906	FD12	48	18	10/300		

- The sleeve is forged with 50BV30 chromium-vanadium steel and chromium-plated mirror knurling
- Batch head is made of S2 alloy steel, with integral quenching, high hardness, large torque and not easy to break


3/8" Screw Driver Socket(+)



Item NO.	Size	L(mm)	A(mm)			RMB
CL501801	PH1	48	18	10/300		
CL501802	PH2	48	18	10/300		
CL501803	PH3	48	18	10/300		
CL501804	PH4	48	18	10/300		

- The sleeve is forged with 50BV30 chromium-vanadium steel and chromium-plated mirror knurling
- Batch head is made of S2 alloy steel, with integral quenching, high hardness, large torque and not easy to break


3/8" Pozidriv Screw Driver Socket



Item NO.	Size	L(mm)	A(mm)			RMB
CL501911	PZ1	48	18	10/300		
CL501812	PZ2	48	18	10/300		
CL501813	PZ3	48	18	10/300		
CL501814	PZ4	48	18	10/300		

- The sleeve is forged with 50BV30 chromium-vanadium steel and chromium-plated mirror knurling
- Batch head is made of S2 alloy steel, with integral quenching, high hardness, large torque and not easy to break


1/2" Torx Screw Driver Socket



Item NO.	Size	L(mm)	A(mm)			RMB
CL501610	T10	55	22	20/400	0.07	
CL501615	T15	55	22	20/400	0.07	
CL501620	T20	55	22	20/400	0.07	
CL501625	T25	55	22	20/400	0.07	
CL501627	T27	55	22	20/400	0.07	
CL501630	T30	55	22	20/400	0.08	
CL501640	T40	55	22	20/400	0.08	
CL501645	T45	55	22	20/400	0.07	
CL501650	T50	55	22	20/400	0.08	
CL501655	T55	55	22	20/400	0.08	

- The sleeve is forged with 50BV30 chromium-vanadium steel and chromium-plated mirror knurling
- Batch head is made of S2 alloy steel, with integral quenching, high hardness, large torque and not easy to break


1/2" Torx Screw Driver Socket



Item NO.	Size	L(mm)	A(mm)			RMB
CL502020	T20	100	22	4/192	0.10	
CL502025	T25	100	22	4/192	0.10	
CL502027	T27	100	22	4/192	0.10	
CL502030	T30	100	22	4/192	0.10	
CL502035	T35	100	22	4/192	0.09	
CL502040	T40	100	22	4/192	0.10	
CL502045	T45	100	22	4/192	0.11	
CL502050	T50	100	22	4/192	0.11	
CL502052	T52	125	22	4/192	0.12	
CL502055	T55	100	22	4/192	0.11	
CL502060	T60	100	22	4/192	0.13	
CL502065	T65	100	22	4/144	0.17	
CL502070	T70	100	22	4/64	0.15	
CL502080	T80	100	22	6/120	0.21	
CL502090	T90	100	22	6/96	0.23	
CL502100	T100	100	22	4/64	0.28	

- The sleeve is forged with 50BV30 chromium-vanadium steel and chromium-plated mirror knurling
- Batch head is made of S2 alloy steel, with integral quenching, high hardness, large torque and not easy to break


1/2" 6pt Screw Driver Socket



Item NO.	Size	L(mm)	A(mm)	🔧	📦	RMB
CL501703	HW3	55	22	20/400	0.07	
CL501704	HW4	55	22	20/400	0.08	
CL501705	HW5	55	22	20/400	0.08	
CL501706	HW6	55	22	20/200	0.08	
CL501707	HW7	55	22	20/400	0.08	

- The sleeve is forged with 50BV30 chromium-vanadium steel and chromium-plated mirror knurling
- Batch head is made of S2 alloy steel, with integral quenching, high hardness, large torque and not easy to break

1/2" 12pt Screw Driver Socket



Item NO.	Size	L(mm)	A(mm)	🔧	📦	RMB
CL503804	M4	55	22	20/400	0.07	
CL503805	M5	55	22	20/400	0.07	
CL503806	M6	55	22	20/400	0.07	
CL503808	M8	55	22	20/400	0.07	
CL503810	M10	55	22	20/400	0.07	

- The sleeve is forged with 50BV30 chromium-vanadium steel and chromium-plated mirror knurling
- Batch head is made of S2 alloy steel, with integral quenching, high hardness, large torque and not easy to break

1/2" Extension 6pt Screw Driver Socket



Item NO.	Size	L(mm)	A(mm)	🔧	📦	RMB
CL502104	HW4	100	22	4/192	0.11	
CL502105	HW5	100	22	4/192	0.11	
CL502106	HW6	100	22	4/192	0.11	
CL502107	HW7	100	22	4/192	0.11	
CL502109	HW9	100	22	4/192	0.11	
CL502108	HW8	100	22	4/192	0.11	
CL502110	HW10	100	22	4/192	0.11	
CL502112	HW12	100	22	4/192	0.13	
CL502114	HW14	100	22	4/64	0.17	
CL502116	HW16	100	22	4/120	0.23	
CL502117	HW17	100	22	4/120	0.24	

- The sleeve is forged with 50BV30 chromium-vanadium steel and chromium-plated mirror knurling
- Batch head is made of S2 alloy steel, with integral quenching, high hardness, large torque and not easy to break

1/2" 12pt Screw Driver Socket



Item NO.	Size	L(mm)	A(mm)	🔧	📦	RMB
CL502205	M5	4/192	100	22	0.10	
CL502206	M6	4/192	100	22	0.11	
CL502207	M7	4/192	100	22	0.11	
CL502208	M8	4/192	100	22	0.11	
CL502209	M9	4/192	100	22	0.11	
CL502210	M10	4/192	100	22	0.11	
CL502212	M12	4/192	100	22	0.11	
CL502214	M14	4/64	100	22	0.13	
CL502216	M16	4/96	100	22	0.17	
CL502218	M18	4/96	100	22	0.23	

- The sleeve is forged with 50BV30 chromium-vanadium steel and chromium-plated mirror knurling
- Batch head is made of S2 alloy steel, with integral quenching, high hardness, large torque and not easy to break


1/2" Extension 6pt Screw Driver Socket



Item NO.	Size	L(mm)	A(mm)	🔧	📦	RMB
CL502305	HW5	10/160	175	22	0.15	
CL502306	HW6	10/160	175	22	0.16	
CL502307	HW7	10/160	175	22	0.16	
CL502308	HW8	10/160	175	22	0.16	
CL502310	HW10	10/160	175	22	0.16	
CL502312	HW12	8/128	175	22	0.16	

- The sleeve is forged with 50BV30 chromium-vanadium steel and chromium-plated mirror knurling
- Batch head is made of S2 alloy steel, with integral quenching, high hardness, large torque and not easy to break

Torx Special screw socket for cylinder head handle



Item NO.	Size	L(mm)	A(mm)	🔧	📦	RMB
CL502052	T52	125	22	4/192	0.12	

- Forged with high quality chrome molybdenum steel
- Special tool for cylinder head handle, integral quenching, high hardness, large torque, not easy to break



Torx Cylinder Head Handle Special Screw Driver Socket



Item NO.	Size	L(mm)	A(mm)	🔧	📏	RMB
CL711352	T52	125	25	2/128	0.21	

- Forged by high quality chromium molybdenum steel (CR-Mo) with phosphating surface, beautiful and durable
- Special tool for cylinder head handle, integral quenching, high hardness, large torque, not easy to break

1/2" 12pt Siamese Pneumatic Screwdriver Socket



Item NO.	Size	L(mm)	A(mm)	🔧	📏	RMB
CL506505	M5X78mm	78	25	24/144	0.10	
CL506506	M6X78mm	78	25	24/144	0.09	
CL506508	M8X78mm	78	25	24/144	0.09	
CL506510	M10X78mm	78	25	24/144	0.11	
CL506512	M12X78mm	78	25	24/144	0.12	
CL506514	M14X78mm	78	25	24/144	0.13	
CL506516	M16X78mm	78	25	24/144	0.16	
CL506518	M18X78mm	78	25	20/120	0.15	

- Forged by high quality chromium molybdenum steel (CR-Mo) with phosphating surface, beautiful and durable
- Special tool for cylinder head handle, integral quenching, high hardness, large torque, not easy to break

1/2" 6pt Siamese Pneumatic Screwdriver Socket



Item NO.	Size	L(mm)	A(mm)	🔧	📏	RMB
CL506704	HW4X78mm	78	25	24/144	0.11	
CL506705	HW5X78mm	78	25	24/144	0.09	
CL506706	HW6X78mm	78	25	24/144	0.10	
CL506707	HW7X78mm	78	25	24/144	0.12	
CL506708	HW8X78mm	78	25	24/144	0.11	
CL506710	HW10X78mm	78	25	24/144	0.13	
CL506712	HW12X78mm	78	25	24/144	0.15	
CL506714	HW14X78mm	78	25	24/144	0.16	
CL506717	HW17X78mm	78	25	24/144	0.19	
CL506719	HW19X78mm	78	25	24/144	0.21	

- Forged by high quality chromium molybdenum steel (CR-Mo) with phosphating surface, beautiful and durable
- Special tool for cylinder head handle, integral quenching, high hardness, large torque, not easy to break

1/2" Torx Siamese Pneumatic Screwdriver Socket



Item NO.	Size	L(mm)	A(mm)	🔧	📏	RMB
CL506630	T30X78mm	78	25	24/144	0.09	
CL506640	T40X78mm	78	25	24/144	0.09	
CL506645	T45X78mm	78	25	24/144	0.09	
CL506650	T50X78mm	78	25	24/144	0.10	
CL506655	T55X78mm	78	25	24/144	0.11	
CL506660	T60X78mm	78	25	24/144	0.13	
CL506670	T70X78mm	78	25	24/144	0.14	
CL506680	T80X78mm	78	25	24/144	0.17	
CL506690	T90X78mm	78	25	24/144	0.18	

- Forged by high quality chromium molybdenum steel (CR-Mo) with phosphating surface, beautiful and durable
- Special tool for cylinder head handle, integral quenching, high hardness, large torque, not easy to break

8 PCS Of Torx Pneumatic Screwdrivers Piece Socket Set



Item NO.	Size	🔧	📏	RMB
CL507108	T30, T40, T45, T50, T55, T60, T70, T90	1	1.32	

- Forged by high quality chromium molybdenum steel (CR-Mo) with phosphating surface, beautiful and durable
- Special tool for cylinder head handle, integral quenching, high hardness, large torque, not easy to break

8 Pcs 6pt Of Pneumatic Screwdrivers Piece Socket Set



Item NO.	Size	🔧	📏	RMB
CL507208	H5, H6, H8, H10, H12, H14, H17, H19	1	1.32	

- Forged by high quality chromium molybdenum steel (CR-Mo) with phosphating surface, beautiful and durable
- Special tool for cylinder head handle, integral quenching, high hardness, large torque, not easy to break


1/2" 6pt Screwdriver bit



Item NO.	Size			RMB
CL507404	H4X75mm		0.04	
CL507405	H5X75mm		0.05	
CL507406	H6X75mm		0.05	
CL507407	H7X75mm		0.05	
CL507408	H8X75mm		0.05	
CL507410	H10X75mm		0.05	
CL507412	H12X75mm		0.07	

- Comply with DIN 2963 standard manufacturing requirements
- It is made of S2 steel imported from Taiwan with hardness hrC55-60 °
- The surface is red and treated by electroplating to prevent rust
- Used for fastening, installation and disassembly of various hex socket screws and bolts


1/2" 12pt Screwdriver bit



Item NO.	Size			RMB
CL507605	M5X75mm		0.04	
CL507606	M6X75mm		0.04	
CL507608	M8X75mm		0.04	
CL507609	M9X75mm		0.04	
CL507610	M10X75mm		0.05	
CL507612	M12X75mm		0.05	
CL507614	M14X75mm		0.05	

- Comply with DIN 2963 standard manufacturing requirements
- It is made of S2 steel imported from Taiwan with hardness hrC55-60 °
- The surface is red and treated by electroplating to prevent rust
- Used for fastening, installation and disassembly of various hex socket screws and bolts

1/2" Torx Screwdriver bit



Item NO.	Size			RMB
CL507520	T20X75mm		0.04	
CL507525	T25X75mm		0.04	
CL507527	T27X75mm		0.04	
CL507530	T30X75mm		0.04	
CL507540	T40X75mm		0.04	
CL507545	T45X75mm		0.04	
CL507550	T50X75mm		0.05	
CL507555	T55X75mm		0.05	

- Comply with DIN 2963 standard manufacturing requirements
- It is made of S2 steel imported from Taiwan with hardness hrC55-60 °
- The surface is red and treated by electroplating to prevent rust
- Used for fastening, installation and disassembly of various hex socket screws and bolts

1/4" Power Socket



Item NO.	Size			RMB
CL502401	8*42mm	200/1600		
CL502402	10*42mm	150/1200		
CL502406	6*65mm	150/1200		
CL502408	8*65mm	10/500		
CL502409	9*65mm	100/800		
CL502410	10*65mm	8/500		
CL502412	12*65mm	8/800		
CL502413	13mm			
CL502414	14*65mm	80/640		

- Made of chromium-vanadium steel, integral heat treatment, outer hexagon 1/4"
- Used for the fixation and disassembly of general self-tapping screws
- With strong magnetic, hardness up to HRC60±2

6pt Deep Hole Socket



Item NO.	Size			RMB
CL502608	8X80mm	5/1000		
CL502610	10X80mm	5/1000		
CL502612	12X80mm	2/360		
CL502614	14X80mm	2/320		

- Made of high-quality alloy steel, with overall heat treatment, high hardness and high torque.
- The hexagonal socket is designed with a deepened design, suitable for various maintenance, installation and other purposes.
- Paired with electric and pneumatic tools, it saves time and effort.

3pcs Connecting Rod



Item NO.	Size			RMB
CL509303	3PCS	10/120		
CL509301	1/2"	24/288		

- The adapter rod is made of S2 silicon alloy steel by cold forging
- 1/4" outer hexagon to 1/4" mortise, 1/4" to 3/8" mortise, 1/4" to 1/2" mortise
- This adapter rod is suitable for small torsion force and can be used with sleeve



13pcs Advanced Impact Screw Driver Set



Item NO.	Size	Weight	Volume	RMB
CL702513	HW7 HW8 PH2 PH3 PH4 SL5 SL6 SL7 SL8 SL8	20		

- Used to remove all kinds of difficult or rusty screws that cannot be removed
- Knock the impact batch, the batch body structure will appear a left rotation force, to achieve the purpose of removing the screw
- Heat treatment of the tail, positioning technology for the square head

Broken Screw Extractor



Item NO.	Size	Weight	Volume	RMB
CL705951	5PCS (Thick)	10/120	0.14	
CL705952	5PCS (thin)	10/120	0.12	

- Made of advanced 35 chromium-molybdenum alloy steel by integral forging
- Remove damaged screws, threaded pipes, bolts and tacks
- hardness HRC54~56° with roll formed left hand thread

11PCS Broken Screw Extractor (Thick)



Item NO.	Size	Weight	Volume	RMB
CL709911	11PCS	48	0.43	

- It is made of high-quality GCR15 tool steel by integral forging
- Remove damaged screws, threaded tubes, bolts
- hardness HRC54~56° with rolling left hand coarse thread

Broken Screw Extractor



Item NO.	Size	Weight	Volume	RMB
CL705961	6P(thick)	10/120	0.24	
CL705962	6P(thin)	10/120	0.22	

- Made of advanced 35 chromium-molybdenum alloy steel by integral forging
- Remove damaged screws, threaded pipes, bolts and tacks
- hardness HRC54~56° with roll formed left hand thread

8PCS broken pipe and broken wire extractor set



Item NO.	Size	Weight	Volume	RMB
CL705903	8PCS	10/20		

- Made of high quality alloy steel with integral heat treatment
- hardness HRC54~56° with rolling left hand coarse thread
- It is specially used for taking out broken head of steel water pipe, and can also be used for taking out broken head screws

model	1#	2#	3#	4#	5#	6#	7#	8#
diameter	4mm	5mm	6.4mm	7.6mm	11mm	15mm	19mm	24mm
Scope	3-6mm	6-8mm	8-11mm	11-14mm	14-18mm	18-25mm	25-35mm	35-50mm

5PCS Double Head Broken Screw Extractor



Item NO.	Size	Weight	Volume	RMB
CL705901	5PCS	20/200		

- Made of high-speed steel (HSS4341) CNC machining, the whole secondary heat treatment;
- Remove steel or iron screws with broken heads or damaged heads;
- Cooperate with the manual electric drill, and set the manual electric drill to the turning state.

Scope of application:

- 0# Remove screws 2-3mm in diameter. 1# Remove screws 3-5mm in diameter
- 2# Remove screws 4-8mm in diameter. 3# Remove screws 5-10mm in diameter
- 4# Remove screws 6-12mm in diameter

5PCS Broken Screw Extractor(Scaffold)



Item NO.	Size			RMB
CL705902	5PCS	10/100		

- Made of chromium-molybdenum steel with integral heat treatment;
 - Remove steel or iron screws with broken heads or damaged heads;
 - Convenient and fast to use.
- Metric: 3-6 6-8 8-11 11-14 (mm) scaffold (W1/16-3/8)
Imperial: 1/8-1/4 1/4-5/16 7/16/9/16 scaffold (W1/16-3/8)

Pipe Extractor



Item NO.	Size			RMB
CL705905	M25-M50	10/100		

- Made of high quality alloy steel, integrated heat treatment;
- It is specially used for taking out broken head of steel water pipe, and can also be used for taking out broken head screws;
- Used to remove the broken end of 4 and 6 water pipes.
- Scope of application: 4 m25-M35 6 M35-M50

6pt Handle broken screw extractor (5PCS thick)



Item NO.	Size			RMB
CL705953	5PCS	10/100		

- Made of high quality alloy steel and heat treated.
- Quick removal of damaged screws, pipe bolts and tack.
- Application scope: M3-M6 m6-M8 M8-M11 M11-M14 M14-M18

Pipe Extractor



Item NO.	Size			RMB
CL705904	M25-M35	25/50	0.17	
CL705906	M35-M50	10/100	0.28	

- Made of high quality alloy steel with integral heat treatment
- hardness HRC54~56° with rolling left hand coarse thread
- It is specially used for taking out broken head of steel water pipe, and can also be used for taking out broken head screws


6pt Handle broken screw extractor 6PCS thin(with Adapter)



Item NO.	Size			RMB
CL705963	6PCS	10/100		

- Made of high quality alloy steel and heat treated.
- Quick removal of damaged screws, pipe bolts and tack.
- Scope of application: M3-M6 m6-M8 M8-M11 M11-M14 M14-M18 quick connector

Magnetize and Degausser

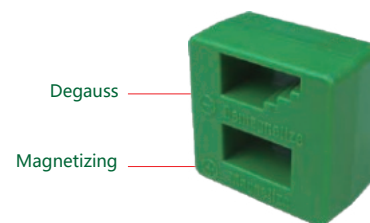

Item NO.	Size			RMB
CL507001		30	0.07	

- Used for demagnetization or demagnetization of screwdriver or similar iron tools
- High strength plastic shell, impact resistant



PLIERS SERIES



Japan Combination Pliers



Item NO.	Size		RMB
CL609116	6"	10/60	
CL609117	7"	10/60	
CL609118	8"	10/60	

- The clamp body is forged by 60Cr-V chromium vanadium steel, and the edge is hardened by oil, with hardness HRC60~62°
- Two-color new plastic TPR is used for injection molding twice, with a more novel style
- Shear range: medium hard steel wire 2.3mm, copper wire 3.2mm

Japan Diagonal Pliers



Item NO.	Size		RMB
CL609136	6"	10/60	

- The clamp body is forged by 60Cr-V chrome-vanadium steel, with the edge hardened by oil, and the edge hardness is HRC54~58°
- Application: Shisong shear fine copper wire and cutting tip
- Handle adopts two-color processing, anti-slip and good grip quality
- Shear range: copper wire 3.0mm, iron wire 2.0mm

Japan Long Nose Pliers



Item NO.	Size		RMB
CL609126	6"	10/60	
CL609128	8"	10/60	

- Made of chromium-vanadium steel, high bremsstrahlung and wear resistance after oil quenching and hardening treatment
- With long flat jaws and serrated clamping surfaces
- Application: used for precision mechanical clamping, bending and shearing
- Edge hardness HRC53~56°
- Good grip quality with anti-slip handle
- Shear range: 1.5mm for iron wire and 2.6mm for copper wire

Japan Long Nose Pliers



Item NO.	Size		RMB
CL609146	6"	10/60	

- Forged with high quality CR-V chromium vanadium steel
- The cutting edge is processed by high-frequency quenching process, which has high hardness and saves shear force
- Handle made of professional TPR material according to human body engineering mechanics, comfortable and durable
- Suitable for crimping, twisting, stranding and shearing of iron wire and steel wire, etc. Electrical communication instrument, precision instrument assembly and repair
- Shear range: 1.5mm for iron wire and 2.6mm for copper wire

Product parameters



Article number	Product name	Size (inches)	A mm	B mm	C mm	L mm	D mm	Z Opening width mm	W weight kg
CL609118	Japan Combination Pliers	8	61.00	24.70	13.60	216.5	55.40	55.40	0.400
CL609117	Japan Combination Pliers	7	55.40	26.40	12.50	193.3	54.50	39.00	0.305
CL609116	Japan Combination Pliers	6	50.30	22.40	12.20	166.1	51.60	42.50	0.240
CL609126	Japan Long Nose Pliers	6	66.40	18.20	10 (3)	169	54.00	60.70	0.180
CL609128	Japan Long Nose Pliers	8	78.60	20.50	11.20	208	55.00	56.00	0.260
CL609136	Japan Diagonal Pliers	6	37.70	20.02	11.10	166	58.00	29.96	0.215
CL609146	Japan Long Nose Pliers	6	66.40	18.20	10 (3)	169	54.00	60.70	0.180



Labor-saving Combination Pliers



Item NO.	Size	Weight	Volume	RMB
CL613908	8"	12/60	0.34	

- Created by 60Cr-V chromium vanadium steel and fired by oil only
- Head edge hardness of chrome plating HRC59~62°
- Eccentric design, unique labor-saving function, 35% energy saving than ordinary pliers, sharp cutting, easy and free.
- Handle TPR two-color rubber and plastic handle, comfortable feel, anti-slip grip quality is good
- Shear range: medium hard steel wire 2.3mm, copper wire 3.2mm

Multifunctional Electrician Combination Pliers



Item NO.	Size	Weight	Volume	RMB
CL617401	9"	10/60	0.45	

- The cutting edge hardness of chromium plating on the head is HRC53~58° after oil fired stiff
- Eccentric labor-saving design, with wire stripping port function, with labor-saving characteristics, 40% energy saving than ordinary pliers, Cut sharp and easy.
- With wire stripping and wire pressing functions
- Handle TPR two-color rubber and plastic handle, comfortable feel, anti-slip grip quality is good

Labor-saving Long Nose Pliers



Item NO.	Size	Weight	Volume	RMB
CL614006	6"	12/60	0.19	

- Created by 60Cr-V chromium vanadium steel and fired by oil only
- Head edge hardness of chrome plating HRC59~62°
- Eccentric design, unique labor-saving function, 35% energy saving than ordinary pliers, sharp cutting, easy and free.
- Handle TPR two-color rubber and plastic handle, comfortable feel, anti-slip grip quality is good
- Shear range: medium hard steel wire 2.0mm, copper wire 3.0mm

Multifunctional Electrician Long Nose Pliers



Item NO.	Size	Weight	Volume	RMB
CL617402	9"	10/60	0.39	

- Forged by high quality alloy steel, the cutting edge hardness is HRC53~58° by high-frequency quenching
- New design, more than 40% energy saving than ordinary pliers
- Wire pressing and wire stripping functions
- TPR two-color rubber and plastic handle, anti-slip handle with good grip quality

Labor-saving Diagonal Pliers



Item NO.	Size	Weight	Volume	RMB
CL614106	6"	12/60	0.22	
CL614107	7"	12/60	0.28	

- Created by 60Cr-V chromium vanadium steel and fired by oil only
- Head edge hardness of chrome plating HRC59~62°
- Eccentric design, unique labor-saving function, 35% energy saving than ordinary pliers, sharp cutting, easy and free.
- Handle TPR two-color rubber and plastic handle, comfortable feel, anti-slip grip quality is good
- Shear range: medium hard steel wire 1.5mm, copper wire 2.6mm

Multifunctional Electrician Elbow Long nose Pliers



Item NO.	Size	Weight	Volume	RMB
CL617403	9"	10/60	0.34	

- Comply with DIN 5745 standard manufacturing requirements
- High quality alloy steel forging, cutting edge high-frequency hardening hardness in HRC53~58°
- New elbow design, more than 40% energy saving pliers
- With 3 groups of wire stripping functions and shearing functions
- TPR two-color rubber and plastic handle, anti-slip handle with good grip quality

Germany Type Advanced Combination Pliers



Item NO.	Size			RMB
CL612018	8"	10/60	0.37	

- The clamp body is forged with 55# steel, and the cutting edge is high-frequency quenched
- Hardness is between HRC53 and 58°
- TPR two-color rubber and plastic handle, anti-slip handle with good grip quality

G17 Type Combination Pliers



Item NO.	Size			RMB
CL615908	8"	10/60	0.39	

- The clamp body is forged from 55# steel and hardened by oil quenching
- Double material patent handle designed according to ergonomic design, environmentally friendly and durable
- Shear capacity: copper wire 2.6mm, iron wire 2.4mm, steel wire 1.8mm

Germany Type Advanced Long Nose Pliers



Item NO.	Size			RMB
CL612116	6"	10/60	0.17	
CL612118	8"	10/60	0.25	

- The clamp body is forged with 55# steel, and the cutting edge is high-frequency quenched
- Hardness is between HRC53 and 58°
- TPR two-color rubber and plastic handle, anti-slip handle with good grip quality

G17 Type Long Nose Pliers



Item NO.	Size			RMB
CL615916	6"	10/60	0.18	
CL615918	8"	10/60	0.27	

- The clamp body is forged from 55# steel and hardened by oil quenching
- Double material patent handle designed according to ergonomic design, environmentally friendly and durable
- Shear capacity: copper wire 2.6mm, iron wire 2.4mm, steel wire 1.8mm

Germany Type Advanced Diagonal Pliers



Item NO.	Size			RMB
CL612216	6"	10/60	0.21	

- The clamp body is forged with 55# steel, and the cutting edge is high-frequency quenched
- Hardness is between HRC53 and 58°
- TPR two-color rubber and plastic handle, anti-slip handle with good grip quality

G17 Type Diagonal Pliers



Item NO.	Size			RMB
CL615926	6"	10/60	0.21	

- The clamp body is forged from 55# steel and hardened by oil quenching
- Double material patent handle designed according to ergonomic design, environmentally friendly and durable
- Shear capacity: copper wire 2.6mm, iron wire 2.4mm, steel wire 1.8mm



VDE
绝缘



U.s.a Type Combination Pliers



Item NO.	Size		RMB
CL600708	8"	10/60	
CL600706	6"	10/60	

- The clamp body is forged from 45# high carbon steel and hardened by oil quenching
- The handle is made of PP+TPR double color injection molding, special handle, environmental protection and durable

Size	Clamp head length(mm)	Clamp head width(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
6	49.11	22.37	10.05	163	52.25	29.15	0.245
8	63.11	26.84	12.16	205	57.57	39.56	0.380

T Type Combination Pliers



Item NO.	Size			RMB
CL619208	8"	12/72		

- The clamp body is made of high-quality alloy steel, which is strong and durable.
- The whole body of the pliers is heat treated, and the cutting edge is sharp.
- The handle is designed according to ergonomics and is comfortable to use.

Clamp head length(mm)	Clamp head width(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
2.51	27.45	12.12	203	61.12	40.06	0.385

U.s.a Type Long Nose Pliers



Item NO.	Size		RMB
CL600806	6"	10/60	19.32
CL600808	8"	10/60	24.97

- The clamp body is forged from 45# high carbon steel and hardened by oil quenching
- The handle is made of PP+TPR double color injection molding, special handle, environmental protection and durable

Size	Clamp head length(mm)	Clamp head width(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
6	68.44	18.11	9.00	167	55.63	45.90	0.185
8	86.75	21.56	7.33	207	58.26	62.75	0.275

T Type Long Nose Pliers



Item NO.	Size		RMB
CL619218	8"	12/72	
CL619216	6"	12/72	

- The clamp body is made of high-quality alloy steel, which is strong and durable.
- The whole body of the pliers is heat treated, and the cutting edge is sharp.
- The handle is designed according to ergonomics and is comfortable to use.

Size	Clamp head length(mm)	Clamp head width(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
8	81.93	21.84	9.83	203	58.12	60.05	0.270
6	45.00	21.21	9.19	164	59.99	20.51	0.215

U.s.a Type Diagonal Pliers



Item NO.	Size		RMB
CL600906	6"	10/60	

- The clamp body is forged from 45# high carbon steel and hardened by oil quenching
- The handle is made of PP+TPR double color injection molding, special handle, environmental protection and durable

Clamp head length(mm)	Clamp head width(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
46.22	21.16	9.88	158	56.51	18.14	0.215

T Type Diagonal Cutting Plier



Item NO.	Size		RMB
CL619226	6"	12/72	

- The clamp body is made of high-quality alloy steel, which is strong and durable.
- The whole body of the pliers is heat treated, and the cutting edge is sharp.
- The handle is designed according to ergonomics and is comfortable to use.

Clamp head length(mm)	Clamp head width(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
45.00	21.21	9.19	164	59.99	20.51	0.215

Heavy Duty Labor Saving Combination Pliers



Item NO.	Size			RMB
CL601409	9"	6/60	0.46	

- The clamp body is forged from 60Cr-V chromium vanadium steel, and the cutting edge is high-frequency quenched
- Hardness is between HRC59 and 62°
- TPR two-color rubber and plastic handle, anti-slip handle with good grip quality
- More than 40% less force than ordinary wire cutters
- Shear range: medium hard wire 2.4mm, copper wire 3.4mm

Labor Saving Combination Pliers



Item NO.	Size		RMB
CL613911	7.5"	10/60	

- The cutting edge hardness of chromium plating on the head is HRC53~56° after oil fired stiff
- Made of 55# tool steel, eccentric design, unique labor-saving function, 40% energy saving than ordinary pliers
- Cutting sharp and easy
- Comfortable feel and good quality of anti-slip grip

Clamp head length(mm)	Clamp head width(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
64.00	27.00	11.40	192	54.70	33.70	0.310

Labor-saving Combination Pliers



Item NO.	Size		RMB
CL613909	9"	10/60	

- The cutting edge hardness of chromium plating on the head is HRC53~56° after oil fired stiff
- Made of 55# tool steel, eccentric design, unique labor-saving function, 40% energy saving than ordinary pliers
- Cutting sharp and easy
- Comfortable feel and good quality of anti-slip grip

Clamp head length(mm)	Clamp head width(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
69.40	26.90	12.06	221.4	55.60	42.00	0.405

Eccentric Force-saving Long nose Pliers



Item NO.	Size		RMB
CL613926	6"	10/60	

- The cutting edge hardness of chromium plating on the head is HRC53~56° after oil fired stiff
- Made of 55# tool steel, eccentric design, unique labor-saving function, 40% energy saving than ordinary pliers
- Cutting sharp and easy
- Comfortable feel and good quality of anti-slip grip

Clamp head length(mm)	Clamp head width(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
53.00	17.50	10.00	165	52.00	36.00	0.195

Eccentric And Labor-saving Multi-function Combination Pliers



Item NO.	Size		RMB
CL613910	8"	10/60	

- It is made of 55# high carbon steel and fired only by oil mature
- Edge hardness HRC54~58°
- Eccentric design, unique labor-saving function, 35% energy saving than ordinary pliers, sharp cutting, easy and free.
- Comfortable feel and good quality of anti-slip grip

Clamp head length(mm)	Clamp head width(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
64.00	23.10	11.70	205.5	56.20	49.80	0.385

Eccentric Force-saving Diagonal Pliers



Item NO.	Size		RMB
CL613936	6"	10/60	

- The cutting edge hardness of chromium plating on the head is HRC53~56° after oil fired stiff
- Made of 55# tool steel, eccentric design, unique labor-saving function, 40% energy saving than ordinary pliers
- Cutting sharp and easy
- Comfortable feel and good quality of anti-slip grip

Clamp head length(mm)	Clamp head width(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
32.00	21.50	10.00	172	53.00	25.00	0.245





Multi-function Combination Pliers



Item NO.	Size		RMB
CL618309	9"	6/48	

- The cutting edge hardness is HRC60~62° after oil fired stiff
- Eccentric design, unique labor-saving function, 35% energy saving than ordinary pliers, sharp cutting, easy and free.
- Handle TPR two-color rubber and plastic handle, comfortable feel, anti-slip grip quality is good

Clamp head length(mm)	Clamp head width(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
106.73	36.47	12.15	223	53.41	31.51	0.430

Top Cutting Wire Stripping Pliers



Item NO.	Size			RMB
CL615801	6"	50		

- It is created by 50Cr fine work and fired by oil only and the head is chrome plated
- Double color handle adopts secondary injection molding process, TPR soft plastic handle, comfortable to hold
- Can be adjusted to wire or harness diameter by knurling screws and lock nuts (5.0mm~10.0mm²) with reset switch, it can peel single strand, multi-strand and thin stranded conductor or conductor with plastic or rubber insulation layer

Combination Pliers(Economical model)



Item NO.	Size		RMB
CL618508	8"	12/72	

- The clamp body is made of high quality alloy steel, strong and durable
- Overall heat treatment of clamp body, sharp cutting edge
- The handle is ergonomic and comfortable to use

Clamp head length(mm)	Clamp head width(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
64.56	29.50	12.74	200	56.65	33.43	0.405

Flat Nose Pliers



Item NO.	Size			RMB
CL610406	6"	6/60	0.18	

- Forged by alloy steel and heat treated by clamp, it is durable, long service life and easier to operate
- Non-slip material handle, comfortable to grip, suitable for precision work

Eccentric Combination Pliers



Item NO.	Size		RMB
CL617308	8"	10/60	

- Forged by 45# carbon steel and hardened by oil quenching
- The step design is adopted for the gate, the steel wire will not slip when clamping and pulling, and the anti-wear steel wire is special for electricians
- Two-color handle, made of TPR soft glue, comfortable to hold
- Used for household appliances, automobiles, mechanical equipment, water pipes, etc

Clamp head length(mm)	Clamp head width(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
63.40	26.90	12.60	206.5	57.30	43.40	0.400

Mini Needle Nose Pliers



Item NO.	Size			RMB
CL614907	5"	12/120	0.10	

- Made of high quality 50Cr, nickel plated surface, beautiful and rust-proof
- Double color handle adopts secondary injection molding process, comfortable feel
- Equipped with double spring sheet, easy to use

Mini Top Cutting Pliers



Item NO.	Size			RMB
CL614901	5"	12/120	0.09	

- Made of high quality 50Cr, nickel plated surface, beautiful and rust-proof
- Double color handle adopts secondary injection molding process, comfortable feel
- Equipped with double spring sheet, easy to use

Mini Flat Nose Pliers



Item NO.	Size			RMB
CL614903	5"	12/120	0.09	

- Made of high quality 50Cr, nickel plated surface, beautiful and rust-proof
- Double color handle adopts secondary injection molding process, comfortable feel
- Equipped with double spring sheet, easy to use

Mini Round Nose Pliers



Item NO.	Size			RMB
CL614902	5"	12/120	0.09	

- Made of high quality 50Cr, nickel plated surface, beautiful and rust-proof
- Double color handle adopts secondary injection molding process, comfortable feel
- Equipped with double spring sheet, easy to use

Mini Needle Nose Pliers



Item NO.	Size			RMB
CL614904	5"	12/120	0.10	

- Made of high quality 50Cr, nickel plated surface, beautiful and rust-proof
- Double color handle adopts secondary injection molding process, comfortable feel
- Equipped with double spring sheet, easy to use

Mini Combination Pliers



Item NO.	Size			RMB
CL614905	5"	12/120	0.10	

- Made of high quality 50Cr, nickel plated surface, beautiful and rust-proof
- Double color handle adopts secondary injection molding process, comfortable feel
- Equipped with double spring sheet, easy to use

Mini Diagonal Pliers



Item NO.	Size			RMB
CL614908	5"	12/120	0.10	

- Made of high quality 50Cr, nickel plated surface, beautiful and rust-proof
- Double color handle adopts secondary injection molding process, comfortable feel
- Equipped with double spring sheet, easy to use



VDE
绝缘



Mini Bent Nose Pliers



Item NO.	Size			RMB
CL614906	5"	12/120	0.10	

- Made of high quality 50Cr, nickel plated surface, beautiful and rust-proof
- Double color handle adopts secondary injection molding process, comfortable feel
- Equipped with double spring sheet, easy to use

Long Nose Pliers 45 °



Item NO.	Size			RMB
CL602602	11"	4/24	0.30	
CL602612	16"	6/24	0.57	

- Forged with high-quality steel, integrated heat treatment, durable.
- Double color dip plastic handle, more comfortable to use.
- A variety of different Angle design, suitable for more narrow space

Holding Pliers



Item NO.	Size			RMB
CL602603	11"	6/36	0.30	
CL602613	16"	8/32	0.54	

- Forged with high-quality steel, integrated heat treatment, durable.
- Double color dip plastic handle, more comfortable to use.
- A variety of different Angle design, suitable for more narrow space



Long Nose Pliers 0 °



Item NO.	Size			RMB
CL602601	11"	6/48	0.34	
CL602611	16"	12/24	0.57	

- Forged with high-quality steel, integrated heat treatment, durable.
- Double color dip plastic handle, more comfortable to use.
- A variety of different Angle design, suitable for more narrow space

T-series Water Mouth Pliers



Item NO.	Size			RMB
CL601916	6"	6/100		

- The clamp body is forged with precision 55 # steel, which is sturdy and durable.
- The jaws are subjected to high-frequency heat treatment, resulting in sharp and easy cutting.
- Suitable for cutting gates, burrs, etc. of plastic products, widely used in the electronics and telecommunications industries.

Japanese-style Cutting Pliers



Item NO.	Size			RMB
CL616306	6"	12/120		

- The clamp body is forged from high-quality CR-V steel.
- Spring on jaw of clamp, easy to use.
- The clamp head is designed with a sharp end, which is easy to operate in a narrow space.
- The service life is twice as long as that of ordinary pliers

Axes Snip Ring Dipped Pv Handle Pliers



Item NO.	Size		RMB
CL602707	EXTERNAL 7"	6/60	
CL602709	EXTERNAL 9"	6/60	
CL602713	EXTERNAL 13"	6/30	

Size	Clamp head length(mm)	Clamp head diameter(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
7寸	68.24	1.55	9.71	178.00	96.44	39.35	0.155
9寸	78.21	2.25	10.81	226.00	105.00	31.16	0.265
13寸	101.53	3.02	12.77	321.00	124.00	44.97	0.475

Japanese-style Cutting Pliers



Item NO.	Size			RMB
CL601905	5"	6/120	0.11	
CL601906	6"	6/100	0.15	
CL601907	7"	6/72	0.26	

- The clamp body is forged from high-quality CR-V steel.
- Spring on jaw of clamp, easy to use.
- The clamp head is designed with a sharp end, which is easy to operate in a narrow space.
- The service life is twice that of ordinary electronic scissors.

Axes Snip Ring Dipped Pv Handle Pliers



Item NO.	Size		RMB
CL602807	INTERNAL 7"	6/60	
CL602809	INTERNAL 9"	6/60	
CL602813	INTERNAL 13"	6/30	

Size	Clamp head length(mm)	Clamp head diameter(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
7"	55.55	1.60	9.49	164.00	99.94	31.04	0.155
9"	65.18	2.14	10.79	213.00	113.00	30.85	0.270
13"	81.58	2.68	11.40	300.00	152.00	43.11	0.455

Industrial Electronic Cutting Pliers

-3



A05

Item NO.	Size			RMB
CL601911	-3	6/120	0.09	
CL601912	A05	6/120	0.08	

- The clamp body is forged from high-quality CR-V steel.
- Spring on jaw of clamp, easy to use.
- The clamp head is designed with a sharp end, which is easy to operate in a narrow space.
- The service life is twice that of ordinary electronic scissors.

Axes Snip Ring Dipped Pv Handle Pliers



Item NO.	Size		RMB
CL602907	EXTERNAL 7"	6/60	
CL602909	EXTERNAL 9"	6/60	
CL602913	EXTERNAL 13"	6/30	

Size	Clamp head length(mm)	Clamp head diameter(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
7"	70.35	1.55	9.45	180.00	51.84	38.30	0.150
9"	83.71	2.18	10.48	226.00	54.33	41.67	0.270
13"	107.00	3.11	12.76	321.00	62.00	43.53	0.450



Axes Snip Ring Dipped Pv Handle Pliers



Item NO.	Size		RMB
CL603007	HOLE CURVED 7"	6/60	
CL603009	HOLE CURVED 9"	6/60	
CL603013	HOLE CURVED 13"	6/30	

Size	Clamp head length(mm)	Clamp head diameter(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
7	57.97	1.65	9.46	160.00	102.53	30.05	0.145
9	67.99	2.33	10.60	211.00	52.30	52.25	0.275
13	87.48	3.05	12.49	301.00	54.80	36.47	0.415

Circlip Pliers (INTERNAL)



Item NO.	Size		RMB
CL616803	7"	6/60	

- Made of high quality chromium vanadium steel, strong and durable
- The clamp head adopts fine polishing and blackening treatment, with rust protection layer, beautiful and generous
- Used to install and remove the inner spring retainer

Clamp head length(mm)	Clamp head diameter(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
69.50	1.50	9.41	188.00	54.23	34.23	0.145

Circlip Pliers (EXTERNAL)



Item NO.	Size		RMB
CL616801	7"	6/60	

- Made of high quality chromium vanadium steel, strong and durable
- The clamp head adopts fine polishing and blackening treatment, with rust protection layer, beautiful and generous
- Used to install and remove the inner spring retainer

Clamp head length(mm)	Clamp head diameter(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
66.66	1.60	9.92	177.00	90.66	37.88	0.160

Circlip Pliers (HOLE CURVED)



Item NO.	Size		RMB
CL616804	7"	6/60	

- Made of high quality chromium vanadium steel, strong and durable
- The clamp head adopts fine polishing and blackening treatment, with rust protection layer, beautiful and generous
- Used to install and remove the inner spring retainer

Clamp head length(mm)	Clamp head diameter(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
56.89	1.60	9.49	170.00	54.00	29.01	0.150

Circlip Pliers (HOLE STRAIGHT)



Item NO.	Size		RMB
CL616802	7"	6/60	

- Made of high quality chromium vanadium steel, strong and durable
- The clamp head adopts fine polishing and blackening treatment, with rust protection layer, beautiful and generous
- Used to install and remove the inner spring retainer

Clamp head length(mm)	Clamp head diameter(mm)	Clamp head thickness(mm)	Total length(mm)	Width(mm)	Opening width(mm)	Weight(kg)
51.91	1.55	10.17	160.00	87.00	27.82	0.150

4pcs Snip Ring Dipped Pv Handle Pliers



Item NO.	Size			RMB
CL603907	7"	6/24	0.18	

- Made of high quality chromium vanadium steel, strong and durable
- The clamp head adopts fine polishing and blackening treatment, with rust protection layer, beautiful and generous
- Used to install or remove the inner and outer spring and open the retaining ring of the inner and outer spring

Electroplated Straight Axes Snip Ring Embossing Handle Pliers



Item NO.	Size			RMB
CL603106	EXTERNAL 6"	6/120	0.11	

- Made of high-quality alloy steel, strong and durable
- Used for installing and disassembling the spring and opening the spring retaining ring
- Suitable for tight space or precise operation

Electroplated Straight Axes Snip Ring Embossing Handle Pliers



Item NO.	Size			RMB
CL603306	INTERNAL 6"	6/120	0.11	

- Made of high-quality alloy steel, strong and durable
- Used for installing and disassembling the spring and opening the spring retaining ring
- Suitable for tight space or precise operation

Electroplated Straight Axes Snip Ring Embossing Handle Pliers



Item NO.	Size			RMB
CL603206	HOLE STRAIGHT 6"	6/120	0.11	

- Made of high-quality alloy steel, strong and durable
- Used for installing and disassembling the spring and opening the spring retaining ring
- Suitable for tight space or precise operation

Electroplated Straight Axes Snip Ring Embossing Handle Pliers



Item NO.	Size			RMB
CL603406	HOLE CURVED 6"	6/120	0.11	

- Made of high-quality alloy steel, strong and durable
- Used for installing and disassembling the spring and opening the spring retaining ring
- Suitable for tight space or precise operation

Axes Snip Ring Dipped Pv Handle Pliers

EXTERNAL 25"



INTERNAL 25"



HOLE CURVED 25"



HOLE STRAIGHT 25"



- Made of high strength steel with a tip of replaceable special steel and a removable locking mechanism
- Handle blackening
- Used for installing and disassembling the spring and opening the large retaining ring of the spring
- Tips: Tongs can be sold separately

Item NO.	Size	Head length(mm)	Clamp head diameter(mm)	Clamp head thickness(mm)	Total length(mm)	width(mm)	Opening width of pliers(mm)			RMB
CL603525	EXTERNAL 25"	66.66	1.60	9.92	177.00	90.66	37.88	1	0.160	564.66
CL603625	HOLE STRAIGHT 25"	51.91	1.55	10.17	160.00	87.00	27.82	1	0.150	
CL603725	INTERNAL 25"	69.50	1.50	9.41	188.00	54.23	34.23	1	0.145	
CL603825	HOLE CURVED 25"	56.89	1.60	9.49	170.00	54.00	29.01	1	0.150	



5 Nails Locking Pliers



Item NO.	Size		RMB
CL602108	10"	10/60	

- Made of high alloy steel, with strong toughness and anti-rust treatment with chrome plating
- Used to clamp all kinds of special-shaped workpieces without damaging the surface
- Heat treatment regulating rod, easy to adjust to the best size
- Used for clamping pipe fittings, pulling parts and loosening iron screws

L	D	B	Width of jaw	Maximum opening	Thickness	Weight
220	35	65.00	10.64	57	17.60	0.485

Locking Pliers




Item NO.	Size		RMB
CL602101	10"	6/48	

- Made of high quality chromium molybdenum steel, industrial design, surface plated with chromium and anti-rust treatment
- Special back shape makes it suitable for pipe or automotive applications for safe clamping of profile pipe fittings and other workpieces
- With quick release lever, the spacing and clamping force can be adjusted by knurled screws
- The inner hexagon behind the adjusting screw can be tightened with an 8mm inner hexagon wrench

L	D	B	Width of jaw	Maximum opening	Thickness	Weight
251	70	67.00	12.70	80	20.00	0.55

3 Nails Locking Pliers Rubble Handle

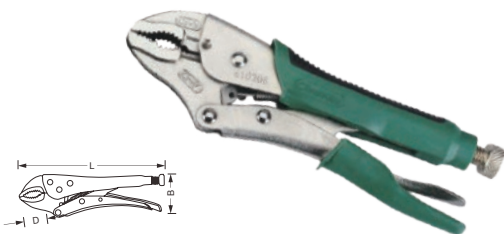

Item NO.	Size		RMB
CL602215	10"	6/48	

- Made of chromium-vanadium steel with strong toughness and anti-rust treatment
- Used for clamping pipe fittings, pulling pieces and ningson iron screws
- Ergonomic design of double material handle, environmental protection and durable, more comfortable to use

L	D	B	Width of jaw	Maximum opening	Thickness	Weight
223	34	70.00	12.90	62	29.00	0.57

Locking Pliers



Item NO.	Size		RMB
CL602214	10"	6/36	

- Made of high alloy steel, with strong toughness and anti-rust treatment with chrome plating
- Wide flat mouth, is the ideal tool for sheet metal parts processing, can be used for bonding, bending, molding and expansion of parts
- Spacing and clamping force are adjusted by knurled screws with quick release lever

L	D	B	Width of jaw	Maximum opening	Thickness	Weight
248	53	65.00	96.00	75	96.00	0.75

3 Nails Locking Pliers



Item NO.	Size		RMB
CL602201	10"	6/48	

- Made of high quality chrome molybdenum steel, industrial design, nickel plated surface anti-rust treatment
- Used to clamp all kinds of special-shaped workpieces without damaging the surface
- Used for clamping pipe fittings, pulling parts and loosening iron screws
- With quick release lever, the spacing and clamping force can be adjusted by knurled screws
- The inner hexagon behind the adjusting screw can be tightened with an 8mm inner hexagon wrench, Free 8mm inner hexagon

L	D	B	Width of jaw	Maximum opening	Thickness	Weight
227	68.00	34		57		0.610

Locking Pliers



Item NO.	Size		RMB
CL602010	10"	6/36	

- It is made of alloy steel with good toughness, and the surface is chrome plated and rust-proof
- Used for clamping profiles and flat plates during welding
- U jaw ensures visibility during welding
- Spacing and clamping force are adjusted by knurled screws with quick release lever

L	D	B	Width of jaw	Maximum opening	Thickness	Weight
230	78	73.00	70.00	61	39.00	0.63

C Type Locking Pliers



Item NO.	Size		RMB
CL602011	11"	6/36	

- Made of high alloy steel, with strong toughness and anti-rust treatment with chrome plating
- Adjustable or clamping claw can clamp all kinds of large volume, uneven and conical workpiece, such as high edge profiles
- Spacing and clamping force are adjusted by knurled screws with quick release lever

L	D	B	Width of jaw	Maximum opening	Thickness	Weight
280	95	139.00	27.50	97	27.50	0.65

Locking Pliers



Item NO.	Size			RMB
CL601019	19"	6/48	0.73	

- Made of high alloy steel, with strong toughness and anti-rust treatment with chrome plating
- Used for clamping various shapes of the workpiece within the clamping capacity of the chain
- Spacing and clamping force are adjusted by knurled screws with quick release lever

L	D	B	Width of jaw	Maximum opening	Thickness	Weight
240	45	64.00	14.20	48	20.50	0.73

Locking Pliers



Item NO.	Size		RMB
CL602002	18"	2/20	

- It is made of chrome-vanadium steel with strong toughness, and the surface is coated with nickel to prevent rust
- Suitable for professional clamping of carpenters, fitters and maintenance workers
- Spacing and clamping force are adjusted by knurled screws with quick release lever

L	D	B	Width of jaw	Maximum opening	Thickness	Weight
625	310.00	44.00		87	510	0.69

Water Pump Pliers



Item NO.	Size		RMB
CL602310	10"	10/50	

- Made to DIN ISO 8976 standard
- Used for disassembling pipes and nuts and bolts, self-locking function
- Dip plastic handle, comfortable feel
- Nickel plating surface treatment, strong rust resistance

L	D	B	Width of jaw	Maximum opening	Thickness	Weight
260	34	57.00	11.25	90	19.20	0.41

Long Nose Lock-grip Pliers



Item NO.	Size		RMB
CL602109	9"	10/50	

- Made of chromium-vanadium steel with strong toughness and anti-rust treatment
- Cutting edge with shearing function, easy to use
- The tail rotating adjusting screw can be adjusted according to the size of the clamped object

L	D	B	Width of jaw	Maximum opening	Thickness	Weight
25	67	52.00	12.00	101	17.40	0.40

Carp Joint Pliers



Item NO.	Size			RMB
CL602406	6"	12/60	0.15	
CL602408	8"	12/60	0.26	

- High quality alloy steel is used to forge high quality chromium vanadium steel
- The clamping range of the dip handle head can be adjusted



Button Type Water Pump Pliers



Item NO.	Size		RMB
CL602352	10"	10/50	
CL602353	12"	8/40	

- The quick positioning adjustment button design can quickly adjust the jaw size.
- V-shaped jaw, inverted tooth design, clear tooth pattern, stable clamping and no slipping.
- The whole is forged from CR-V chrome vanadium steel with high frequency quenching and high hardness,
- Sturdy and durable plastic impregnated handle, comfortable to grip.

L	D	B	Width of jaw	Maximum opening	Thickness	Weight
248	34	133	8.00	77	19.42	0.42
313	38	162	8.90	102	21.50	0.63

Industrial-grade Water Pump Pliers



Item NO.	Size		RMB
CL602320	10"	6/48	
CL602322	12"	6/36	

- Made of chromium-vanadium steel, blackened head surface treatment after oil quenching and hardening
- Tooth materials with special hardening treatment on the clamping surface harden HRC50-55°
- Adjust the self-locking function of opening gear belt by sliding
- Dip plastic handle, comfortable feel

L	D	B	Width of jaw	Maximum opening	Thickness	Weight
242	32	115	7.22	87	14.12	0.39
306	45	166	9.70	105	16.36	0.67

Water Pump Pliers



Item NO.	Size		RMB
CL601595	9.5"	6/48	

- High quality high carbon steel precision forging, durable
- Chrome plated surface, rust-proof, beautiful and durable
- The clamping range of the head can be adjusted for easy use

L	D	B	Width of jaw	Maximum opening	Thickness	Weight
238	48	138	9.00	115	18.00	0.33

American Type Heavy Pipe Wrench



Item NO.	Size		RMB
CL606607	200	6/36	
CL606608	250	5/30	
CL606601	300	5/25	
CL606602	350	5/20	
CL606603	450	4/16	
CL606604	600	5/10	
CL606605	900	1/4	
CL606606	1200	1/2	

- The clamp head is made of 55# high carbon steel forged by integral heat treatment
- Equipped with large knurled nuts made by CNC lathe for easy adjustment
- Unique design of upper and lower clamping teeth to ensure strong clamping effect
- Dip plastic handle, anti-slip and labor-saving

Size	Opening length	Closing length	Handle width	Head width	Maximum opening width	Gear width	Weight
2" (300mm)	345.00	290.00	69.00	56.00	29.50	31.00	1.010
14" (350mm)	400.00	330.00	76.00	70.00	32.00	37.00	1.315
18" (450mm)	495.00	415.00	88.00	80.00	36.00	42.00	1.850
24" (600mm)	605.00	515.00	100.00	95.00	40.00	49.00	2.770
36" (900mm)	890.00	783.00	125.00	116.00	47.00	66.00	5.310
48" (1200mm)	1145.00	1015.00	155.00	130.00	58.00	80.00	8.655
8" (200mm)	245.00	205.00	56.00	41.00	24.50	27.00	0.510
10" (250mm)	298.00	245.00	60.00	54.00	26.00	24.50	0.650

European Heavy Pipe Wrench



Item NO.	Size		RMB
CL606611	10"	6/48	
CL606612	12"	6/36	
CL606613	14"	6/24	
CL606614	18"	4/16	
CL606615	24"	2/10	

- The clamp head is made of tool alloy steel, which is refined and forged. The overall heat treatment has high strength
- Close bite of upper and lower teeth, large torque, strong clamping effect

Size	Opening length	Closing length	Handle width	Head width	Maximum opening width	Gear width	Weight
10" (250mm)	290.00	246.00	64.00	47.00	26.00	25.00	0.665
12" (300mm)	325.00	270.00	75.00	56.00	29.00	30.00	0.900
14" (350mm)	396.00	313.00	81.00	84.00	32.00	41.00	1.255
18" (450mm)	497.00	400.00	88.00	105.00	37.00	44.00	1.970
24" (600mm)	595.00	510.00	100.00	87.00	37.00	45.00	2.895

Aluminium Pipe Wrench



Item NO.	Size		RMB
CL613701	8"(200mm)	6/48	
CL613702	10"(250mm)	6/36	
CL613703	12"(300mm)	6/24	
CL613704	14"(350mm)	6/24	
CL613705	18"(450mm)	2/12	
CL613706	24"(600mm)	2/6	
CL613707	36"(900mm)	4	
CL613708	48"(1200mm)	2	

- Forged clamp head of CR-Mo steel, heat treated, hardness is HRC58~60HRC
- Super strength aluminum alloy handle, weight is 1/3 of ordinary pipe pliers.
- The adjusting nut is forged with 45 # steel with hardness HRC35~40 degrees

Size	Opening length	Closing length	Handle width	Head width	Maximum opening width	Gear width	Weight
8" (200mm)	220.00	185.00	55.00	37.00	24.50	22.00	0.270
10" (250mm)	300.00	247.00	63.00	56.00	26.00	24.00	0.450
12" (300mm)	340.00	283.00	73.00	62.00	28.00	26.00	0.640
14" (350mm)	405.00	328.00	77.00	79.00	34.00	33.00	0.900
18" (450mm)	503.00	410.00	93.00	99.00	36.00	42.00	1.450
24" (600mm)	660.00	550.00	104.00	110.00	40.00	54.00	2.235
36" (900mm)	876.00	750.00	130.00	130.00	47.00	68.00	3.925
48" (1200mm)	1305.00	1080.00	156.00	230.00	59.50	83.00	7.710

Retractable and Force Pipe Wrench




Retractable and force use

Item NO.	Size		RMB
CL613711	18"	3/6	
CL613712	24"	2/4	
CL613713	36"	2	
CL613714	48"	2	

- Unique upper and lower teeth bite to ensure strong holding effect
- Clamp head and handle body are forged with CR-V alloy lotus picking
- Ensure super clamping force, special afterloading and lengthening handle design, can be used afterloading
- Widely used in pipeline construction, oil field operations and drilling operations

Size	Opening length	Closing length	Handle width	Head width	Maximum opening width	Gear width	Weight
80D	577.00	473.00	93.00	104.00	36.06	49.41	1.925
95D	655.00	540.00	111.00	115.00	42.22	66.04	3.335
132D	921.00	783.00	134.40	138.00	53.45	73.04	6.415
195D	1105.00	900.00	185.00	205.00	63.98	105.00	9.810

Chaining Type Pipe Wrench

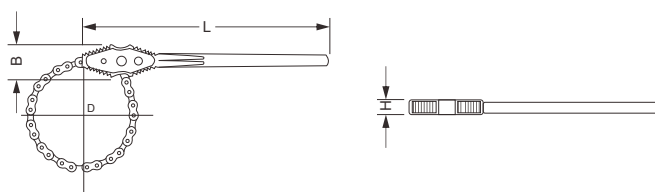

Item NO.	Size		Open the chief	B	H	I	D		RMB
CL607001	4" (700)	4	920.00	85.00	85.00	650.00	140	6.86	
CL607002	6" (900)	4	1000.00	85.00	85.00	870.00	180	7.92	
CL607003	8" (1000)	4	1105.00	85.00	85.00	960.00	240	9.54	
CL607004	10" (1100)	2	1210.00	85.00	85.00	1070.00	280	10.36	

- Suitable for the installation or disassembly of medium and coarse diameter pipes
- It has the advantages of large torque, wide adjustment range and small wear rate on pipe diameter surface. It is an ideal hand tool for pipeline workers



Quick Pipe Wrench



Item NO.	Size		RMB
CL609310	K1	6/72	
CL609311	K2	4/24	

- Patented movable jaws, reasonable structure, flexible adjustment, fast clamping pipe fittings
- Suitable for disassembly and assembly of pipe fittings of different sizes, suitable for narrow space operation
- Range of use: K1 14-28mm K2 28-60mm

Size	L	D	B	Width of jaw	Maximum opening	Thickness	Weight
K1 (4-28mm)	260	47	51.00	14.70	60	23.70	0.38
K2(28-60mm)	381	86	82.00	17.30	105	23.00	0.94

Nutcracker



Item NO.	Size			RMB
CL605906	6"	6/60	0.03	
CL605908	8"	6/60	0.04	

- Created by special tool steel and fired by oil only after hardening, the cutting edge hardness is HRC56~60°
- The head polishing handle is non-slip, comfortable and labor-saving, used for pulling out nails and U-shaped nails
- Industrial grade products suitable for harsh environments

Olecranon Pipe Wrench



Item NO.	Size		RMB
CL605601	1"	36	
CL605602	1.5"	24	

- The clamp head adopts 55# high carbon steel precision forging, integral heat treatment, high strength is good
- The head Angle is designed with 45 degree inclination Angle for special space
- Interlocking jaws provide strong clamping effect
- Industrial grade products suitable for harsh environments

Size	L	D	B	Width of jaw	Maximum opening	Thickness	Weight
1"	314	52	62.00	12.60	67	22.60	0.72
1.5"	382	58	72.00	14.41	98	28.57	1.21

The Cable Pipe Wrench



Item NO.	Size		RMB
CL609301	18"	20	
CL609302	24"	10	

- Suitable for the installation or disassembly of medium and coarse diameter pipes
- It has the advantages of large torque, wide adjustment range and small wear rate on pipe diameter surface. It is an ideal hand tool for pipeline workers

Size	L	D	B	Width of jaw	Maximum opening	Thickness	Weight
50mm	477	42	73.00	27.30	100	40.10	1.34
100mm	640	45	80.00	31.00	103	42.20	2.30

Woodworking Clamp



Item NO.	Size			RMB
CL801502	2"	12/120	0.21	
CL801503	3"	8/80	0.38	
CL801504	4"	5/50	0.55	
CL801505	5"	6/36	0.88	
CL801506	6"	6/24	1.14	
CL801508	8"	6/12	1.38	

- C-type structure, made of high performance forged steel, plastic-sprayed surface, trapezoidal thread, pressure plate and T-type slide bar handle
- Used in metal and steel construction industry, solid structure with high gripping force

High-grade Manual Hydraulic Pliers



Item NO.	Size	Hand	Weight	RMB
CL704501	120	4	4.51	
CL704502	240	4	5.92	
CL704503	300	4	6.17	

- Special steel crimping module, chrome plating process, strong and durable
- Used for crimping copper and aluminum wire terminals and steel wire ropes
- Suitable for copper terminal, less than 240mm casing
- Built-in safety valve, safe and convenient operation

Size	120	240	300
Crimping range			
copper(mm)	10-120	16-240	16-300
aluminum(mm)	10-120	16-150	16-240
Maximum working pressure(T)	12	16	16
Maximum working stroke(mm)	14	22	22

Pipe Vise



Item NO.	Size	Hand	Weight	RMB
CL614802	2"	4	4.49	
CL614803	3"	4	6.50	
CL614804	4"	2	10.04	

- Body made of high quality forged steel, hinged detachable structure, automatic locking hook sleeve, movable clamping jaw, adjustable clamping through self-locking thread spindle
- It can be fixed on the work table for clamping pipe fittings
- Reaming threads, cutting and connecting pipes, etc

Hydraulic Steel-bar Pliers



Item NO.	Size	Hand	Weight	RMB
CL705412	CPC-12A	5	2.70	
CL705416	CPC-16A	4	4.00	
CL705420	CPC-20B	2	6.05	


- Super strength special steel scissors cutting edge, strong and durable, with good shearing effect, convenient operation, fast and other advantages.
- This product is widely used in electric power, communications, petroleum, chemical, mining, metallurgy, construction, shipbuilding and other industries
- Do not allow the tool to get wet, or directly contact the water surface to cause rust, which will affect the internal damage of the cylinder block

Accessories: Blades



Item NO.	Size	RMB
PJ.CL.0131	12B	
PJ.CL.0132	16B	
PJ.CL.0133	20B	

Bench Vise

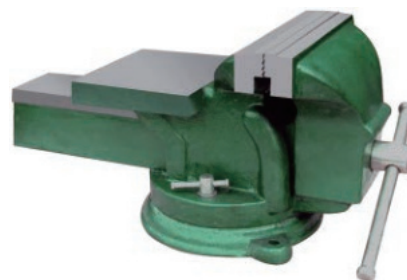

Item NO.	Size	Hand	Weight	RMB
CL614704	4"	1	9.50	
CL614705	5"	1	13.00	
CL614706	6"	1	21.00	
CL614708	8"	1	31.00	
CL614710	10"	1	42.00	
CL614712	12"	1	61.00	

- Die forged steel casting, stronger tensile strength, not easy to fracture
- Claw and drill face are hardened at HRC52-58° at high frequency
- Drill face is used for straightening and upsetting of workpiece, and slide block is opened before
- The workpiece is clamped accurately through adjustable guide rod, and the guide rail is equipped with dustproof mechanism
- The base is made of cast steel and can be rotated 360°



CUTTING TOOLS




T8 Steel Bolt Cutter



Item NO.	Size	Weight	RMB
CL607107	300mm	30	
CL607108	350mm	30	
CL607101	450mm	16	
CL607102	600mm	12	
CL607103	750mm	6	
CL607104	900mm	6	
CL607105	1050mm	4	
CL607106	1200mm	4	

- The clamp body is forged with chromium-molybdenum alloy steel, and the hardness of the clamp head is HRC56-60°
- The cutting edge is strong, and the double arm is made of high carbon steel
- The handle is coated with anti-slip design, and the moment arm is made of seamless steel tube



Size	L	B	L1	B1	Z	Blade length	W
12"/300mm	300	95.00	70.00	50.00	11.40	17.40	0.785
14"/350mm	360	115.00	85.00	56.00	12.30	22.70	0.900
18"/450mm	460	130.00	115.00	70.00	18.60	31.00	1.540
24"/600mm	615	185.00	125.00	83.00	20.32	35.00	2.365
30"/750mm	770	185.00	155.00	90.00	23.20	40.00	3.970
36"/900mm	910	200.00	170.00	110.00	24.10	41.00	5.280
42"/1050mm	1060	235.00	195.00	120.00	27.00	45.00	7.915
48"/1200mm	1180	280.00	195.00	118.00	27.00	45.00	8.575

Bolt Cutter Head



Item NO.	Size	Weight	RMB
CL610545	450mm	30	0.52
CL610560	600mm	24	0.81
CL610575	750mm	12	1.26
CL610590	900mm	12	1.74
CL610510	1050mm	10	
CL610512	1200mm	10	

- T8 high alloy steel is manufactured with high frequency quenching and hardening treatment
- used for various steel threads with shear hardness up to 30HRC
- Larger cutting edge, (replace blade head)

Industrial Grade Bolt Cutter



Item NO.	Size	Weight	RMB
CL613601	12"(300mm)	6/24	0.79
CL613602	14"(350mm)	6/24	
CL613603	18"(450mm)	6/6	
CL613604	24"(600mm)	8	
CL613605	30"(750mm)	6	3.96
CL613606	36"(900mm)	4	5.60
CL613607	42"(1050mm)	2	8.52

- It is made of T8 high alloy steel with high frequency quenching and hardening treatment
- Applicable to all kinds of steel threads with shear hardness up to 30HRC
- Greater cutting ability

Cable Cutter



Haircuts can be purchased separately


Item NO.	Size	Weight	RMB
CL606718	18"	12	
CL606724	24"	10	
CL606732	32"	5	
CL606736	36"	5	

- The cutter head is forged by 60# high manganese steel, and the edge is hardened by high frequency quenching
- Serrated cutting edge, smooth cutting edge, anti-slip handle, anti-oil stain
- Used for shearing multi-strand copper and aluminum cable

Size	L	B	L1	B1	Z	Blade length	W
18寸	445	129.00	95.00	57.00	523.00	36.35	1.600
24寸	580	133.00	105.00	60.00	67.00	30.20	1.870
32寸	790	182.00	152.00	88.00	72.30	53.30	4.390
36寸	888	178.00	154.00	88.00	71.20	52.30	4.400



Steel Wire Rope Cutter

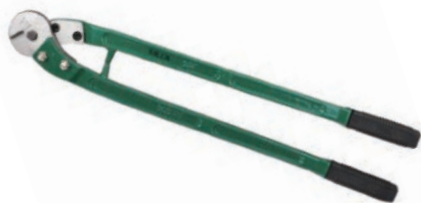

Item NO.	Size		RMB
CL606924	24"	10	
CL606936	36"	5	
CL606942	42"	4	

- The cutting head is forged from T8 high alloy steel, and the cutting edge is high-frequency quenched
- Used to shear steel wire, as well as copper and aluminum cored cables including cables and steel rods as well as stress load lines
- Used for shearing multi-strand copper and aluminum cable

Size	L	B	L1	B1	Z	Blade length	W
24寸	605	148.00	118.00	69.85	35.00	26.40	2.675
36寸	890	157.00	145.00	95.00	31.00	29.00	5.165
42寸	1055	312.00	152.00	100.00	44.00	25.00	7.130

Mini Wire Rope Shears



Item NO.	Size			RMB
CL616908	8"	10/60		

- Made of high quality chromium vanadium steel, with special heat treatment for cutting edge and sharp shearing
- The handle with spring reset design saves effort, and the tail with lock for easy collection
- Shear single or multiple strands of steel wire, cable material, etc

Mini Bolt Cutter



Item NO.	Size		RMB
CL606520	200mm	6/48	28.94

- Made of chromium-vanadium steel, the cutting edge is hardened by high-frequency fired fire
- The surface is passivated and rust-proof, and the lever design saves more than 30% of the effort
- The handle adopts double-color injection molding
- Shear range: it can shear low carbon steel wire, hard solid metal wire, copper core, aluminum core insulation cable with diameter below 3.0mm

Professional Mini Bolt Cutters



Item NO.	Size		RMB
CL606508	8"	10/60	

- Made of chromium-vanadium steel, the cutting edge is hardened by high frequency hardening
- With return spring, the surface is black and rust-proof, and the design of carrying rod saves more than 50% of the effort
- Shear range: steel wire and hard solid metal wire within 3.0mm in diameter, copper core, aluminum core insulation cable, etc

Eagle nose bolt cutters



Item NO.	Size			RMB
CL609110	10"	6/60		

- Made of high quality carbon steel, with high-frequency hardening of the cutting edge
- Circular material with shear hardness HRC40°, handle with plastic handle sheath

Ratcheting Cable Cutter



Item NO.	Size			RMB
CL606771	J240	24	0.74	
CL606772	J300A	24		

- Compact structure design, light weight, suitable for small space operation
- The blade is made of special tool steel with reliable performance and durability
- The cutting edge is smooth and flat after special heat treatment
- Labor-saving ratchet drive design with high torque, easy operation with one hand
- Used for shearing single or multiple strands of copper and aluminum cables
- Tip: Not applicable to steel wire or cable shearing

Cable Cutter



Item NO.	Size			RMB
CL605806	6"	10/120	2.00	
CL605808	8"	10/60	0.33	
CL605810	10"	8/48	0.52	

- Made of 55# steel, the cutting edge is hardened by high frequency
- Suitable for shearing multi-strand copper or aluminum cable
- Shear range:
 - 6 "shear 9mm² or diameter 13mm or less multi-strand copper-aluminum core cable
 - 8 "shear 15mm² or diameter 15mm or less multi-strand copper-aluminum cable
 - 10 "shear 22mm² or diameter 17mm or less multi-strand copper-aluminum core cable

Ratcheting Cable Cutter



Item NO.	Size			RMB
CL606773	J50	18	1.28	
CL606774	J65	6	3.25	
CL606775	J95	3	5.76	
CL606776	J120	3	7.28	

- Compact structure design, light weight, suitable for small space operation
- The blade is made of special tool steel with reliable performance and durability
- The cutting edge is smooth and flat after special heat treatment
- Labor-saving ratchet drive design with high torque, easy operation with one hand
- Used for shearing single or multiple strands of copper and aluminum cables
- Tip: Not applicable to steel wire or cable shearing

Professional Multifunction Scissors 9 Inches



Item NO.	Size			RMB
CL615459	9"	10/60		

- It is specially refined and treated by nitriding
- The cutting edge is sharp and durable, the cutting handle is firm and comfortable
- The handle is made of new environment-friendly non-slip two-color plastic, comfortable to grip
- Sheared packing tape, PVC tape, wire trough, thin copper and aluminum tape, iron sheet within 0.2mm, stainless steel and iron sheet within 0.1mm, etc

Ratchet Type Cable Cutter



Item NO.	Size			RMB
CL606781	J32A	12		
CL606782	J40A	6		

- Compact structure design, light weight, suitable for small space operation
- The blade is made of special tool steel with reliable performance and durability
- The cutting edge is smooth and flat after special heat treatment
- Labor-saving ratchet drive design with high torque, easy operation with one hand
- Used for shearing single or multiple strands of copper and aluminum cables
- Tip: Not applicable to steel wire or cable shearing

Professional Multifunction Scissors 9 Inches



Item NO.	Size			RMB
CL615409	9"	10/60		

- It is specially refined and treated by nitriding
- The cutting edge is sharp and durable, the cutting handle is firm and comfortable
- The handle is made of new environment-friendly non-slip two-color plastic, comfortable to grip
- Sheared packing tape, PVC tape, wire trough, thin copper and aluminum tape, iron sheet within 0.2mm, stainless steel and iron sheet within 0.1mm, etc




American Type Iron Scissors



Item NO.	Size		RMB
CL605508	8"	6/48	
CL605510	10"	6/48	
CL605512	12"	6/48	

- Made of high quality alloy steel, the cutting edge is high-frequency quenching HRC58~60°
- Can be used to shear up to 1.25mm cold rolled steel plate and 0.7mm stainless steel plate
- Dip plastic handle, comfortable to hold



Size	L2	L1	L	B	H	Open width	Weight
8寸	115	60	208	93.00	24.00	103.00	0.340
10寸	141	76	255	99.00	26.00	118.00	0.460
12寸	155	93	298	123.00	28.00	112.00	0.745

England Type Iron Scissors



Item NO.	Size		RMB
CL605708	8"	10/60	
CL605710	10"	10/60	
CL605712	12"	10/40	
CL605714	14"	10/40	

- Made of high-quality alloy steel, high-frequency quenching of the cutting edge, after sandblasting anti-rust treatment
- Can be used to shear up to 1.25mm cold rolled steel plate and 0.7mm stainless steel plate


Size	L2	L1	L	B	H	Open width	Weight
8寸	120	60	203	48.00	20.70	91.00	0.280
10寸	150	75	254	59.00	22.30	112.00	0.465
12寸	180	85	305	61.00	23.60	135.00	0.630
14寸	215	92	351	54.00	25.30	138.00	0.960

German-Style Iron Scissors



Item NO.	Size		RMB
CL606308	8"	6/60	
CL606310	10"	6/48	
CL606312	12"	6/36	
CL606314	14"	6/24	

- The shear body is made of high quality alloy steel.
- The cutting edge is hardened by high-frequency fired fire and the hardness is HRC56~58°
- Fine grinding of edge, used for steel plate with thickness not greater than 1.0mm and stainless steel plate with thickness not greater than 0.8mm.
- The handle is coated with plastic and anti-slip treatment, with spring for easy cutting and reset design.



Size	L2	L1	L	B	H	Open width	Weight
8寸	93	64	207	49.00	24.30	102.00	0.310
10寸	124	74	257	55.00	24.00	113.00	0.520
12寸	151	93	302	51.00	28.30	120.00	0.690
14寸	182	95	352	56.00	28.00	142.00	0.950

Aviation shears



Item NO.	Size		RMB
CL606202	Right	6/60	
CL606302	Straight	6/60	
CL606402	Left	6/60	

- Made of high quality chromium-vanadium steel, the cutting edge is treated by high-frequency quenching and hardening
- Stable ergonomic process handle plastic sheath, anti-slip protection and suspension hole
- Used for cutting 1.2mm cold rolled steel plate and 0.8mm stainless steel plate

Size	L2	L1	L	B	H	Open width	Weight
Right	108	58	242	74.00	23.00	16.80	0.410
Straight	108	63	250	71.00	21.00	15.20	0.405
Left	111	58	244	72.00	20.00	15.00	0.400

Aviation shears



Item NO.	Size		RMB
CL606201	Right	6/60	
CL606301	Straight	6/60	
CL606401	Left	6/60	

- Made of high quality chromium-vanadium steel, the cutting edge is treated by high-frequency quenching and hardening
- Stable ergonomic process handle plastic sheath, anti-slip protection and suspension hole
- Used for cutting 1.2mm cold rolled steel plate and 0.8mm stainless steel plate

Size	L2	L1	L	B	H	Open width	Weight
Right	106	54	244	78.00	21.00	13.30	0.435
Straight	107	63	251	75.00	21.00	19.50	0.445
Left	108	54	243	75.00	21.00	12.00	0.445

Stainless Steel Electronic Cutter



Item NO.	Size		RMB
CL606107	7"	10/60	
CL606108	8"	10/60	

- The cutting head is forged by 3CR13 stainless steel, and the cutting edge is specially heat treated
- Hardness HRC56° Blade with grooves, shear does not slip
- Ergonomically designed soft shoe handle with spring latch
- Used for cutting wires with a cross section of 16mm²

Size	L2	L1	L	B	H	Open width	Weight
7寸	104	63	181	56.00	17.60	41.00	0.145
8寸	101	83	200	55.00	17.90	48.70	0.150

Multifunctional Scissors With Aluminum Handle



Item NO.	Size		RMB
CL606141	210mm	12/72	

- The cutting edge is made of high-quality alloy steel, with a sharp edge. The aluminum alloy handle is lightweight, sturdy, and durable.
- In addition to the conventional scissor function, it also has functions such as opening bottle cap grooves, bone saving grooves, and scraping fish scales with serrations, making it convenient and fast Suitable for use in multiple scenarios.

Stainless Steel Household Cutter



Item NO.	Size		RMB
CL606131	1#-200mm	12/120	
CL606133	3#-150mm	12/120	

- The shear body is made of high quality stainless steel, and the shear handle is ABS engineering plastic
- Beautiful appearance, firm structure, rust proof and durable
- Light to use, strong shearing force, sharp, but not suitable for cutting hard items

Stainless Steel Scissors



Item NO.	Size		RMB
CL606121	195mm	12/120	
CL606123	175mm	12/120	

- The shear body is made of high quality stainless steel, and the shear handle is ABS engineering plastic.
- Blade clearance can be adjusted by shaft with locking nut and screw
- Light to use, strong shearing force, sharp, but not suitable for cutting hard items



Pvc Pipe Cutter



Item NO.	Size		RMB
CL609742	42mm	12/60	

- Zinc-aluminum alloy strong die casting, alloy steel blade
- High-frequency fired fire treatment hardness HRC52~54°
- Alloy, ergonomic handle design
- Surface fine polishing treatment, comfortable use of cutting force
- Used for cutting PVC, ABS, CPVC, PPR pipes
- Tip: Suitable for cutting pipes with diameters below 42mm

Cutting range	L	B	H	h Blade thickness	W kg
mm	219	106.00	27.30	2.60	0.450

Pvc Pipe Cutter



Item NO.	Size		RMB
CL609706	33mm	12/120	

- Sk-5 material triangle blade, PTFEx4 layer technology, sharp cutting, easy and labor-saving, smooth incision.
- The handle is plastic coated, comfortable in hand, and the tail buckle can automatically spring open, which is convenient to carry and durable.

Cutting range	L	B	H	h Blade thickness	W kg
33mm	208	51.00	25.10	2.10	0.205

Pvc Pipe Cutter



Item NO.	Size		RMB
CL609705	33mm	12/120	

- Sk-5 material triangle blade, PTFEx4 layer technology, sharp cutting, easy and labor-saving, smooth incision.
- Aluminum handle, tail buckle can automatically spring open, easy to carry, durable.

Cutting range	L	B	H	h Blade thickness	W kg
33mm	205	51.00	24.00	2.10	0.170

PVC Pipe Cutter



Item NO.	Size		RMB
CL609703	36mm	12/72	

- High quality high carbon steel blade with V-edge and wide tube support surface suitable for precision cutting
- Lone cutting teeth to save cutting effort, zinc alloy main body, tail with safety lock protection
- Used for cutting PE, PE-X, PP, VPE, PB, and PVDF, especially suitable for PVC pipe
- Shear range: suitable for cutting pipe with diameter below 36mm

Cutting range	L	B	H	h Blade thickness	W kg
36mm	200	43.30	21.40	2.10	0.175

Pvc Pipe Cutter



Item NO.	Size		RMB
CL609704	33mm	12/120	

- Sk-5 material triangle blade, PTFEx4 layer technology, sharp cutting, easy and labor-saving, smooth incision.
- Plastic steel handle, easy to carry without clamping, cost-effective and durable.

Cutting range	L	B	H	h Blade thickness	W kg
33mm	200	38.50	22.20	2.10	0.120

Pvc Pipe Cutter



Item NO.	Size		RMB
CL609842	42mm	12/60	

- High quality high carbon steel blade with V-edge and wide tube support surface suitable for precision cutting
- Lone cutting teeth to save cutting effort, zinc alloy main body, tail with safety lock protection
- Used for cutting PE, PE-X, PP, VPE, PB, and PVDF, especially suitable for PVC pipe
- Shear range: suitable for cutting pipe with diameter below 42mm

Cutting range	L	B	H	h Blade thickness	W kg
42mm	219	106.00	27.30	2.60	0.450

Heavy Duty Pvc Pipe Cutting Knife



Item NO.	Size		RMB
CL609942	42	6/60	

- High quality high carbon steel blade with V-edge and wide tube support surface suitable for precision cutting
- Lone cutting teeth to save cutting effort, zinc alloy main body, tail with safety lock protection
- Used for cutting PE, PE-X, PP, VPE, PB, and PVDF, especially suitable for PVC pipe
- Shear range: suitable for cutting pipe with diameter below 42mm



Cutting range	L	B	H	h	W
42mm	222	113.00	30.16	2.60	0.575

How to use a pipe cutter

1. Press the handle inward and open the tail lock switch
2. Gently pull the handle to both sides
3. Place the matching tube, pinch it tightly, and immediately cut it off
4. After cutting, clean the blade with rust proof oil and close the tool.

matters needing attention

1. When using a pipe cutter in winter, it is best to place the pipe in warm water. Soak and heat up to prevent the pipe from cracking and bursting due to low temperature.
2. If there is wear on the edge of the blade, replace it with a blade of the same model as soon as possible.
3. The blade is sharp, please be careful when using.



Pvc Pipe Cutter



Item NO.	Size		RMB
CL609863	63mm	6/36	

- High quality high carbon steel blade with V-edge and wide tube support surface suitable for precision cutting
- Lone cutting teeth to save cutting effort, zinc alloy main body, tail with safety lock protection
- Used for cutting PE, PE-X, PP, VPE, PB, and PVDF, especially suitable for PVC pipe
- Shear range: suitable for cutting pipe with diameter below 63mm



Cutting range	L	B	H	h	W
63mm	271	105.00	25.26	2.60	0.590

Pvc Pipe Cutter



Item NO.	Size		RMB
CL609875	75mm	1/20	

- Sk-5 material blade, PTFE x4 layer technology, sharp cutting, easy and labor-saving, smooth incision.
- Aluminum alloy handle, comfortable, easy to carry, durable.



Cutting range	L	B	H	h	W
75mm	468	158.00	26.80	3.05	1.400

Pipe Cutter



Item NO.	Size	Chief	Width	Height			RMB
CL609664	6-64mm	218	86	34	6/24	0.57	

- Zinc alloy tool rest, light and durable
- Can cut stainless steel, copper, aluminum and thin wall tubes up to 3mm
- Ensure complete cleaning during cutting. Spare blade inside handle
- After use, please keep clean and lubricate each part with light oil regularly



VDE
绝缘



Pipe cutter



Item NO.	Size	Chief	Width	Height			RMB
CL609650	5-50mm	184	65	36.22	6/48	0.42	

- Zinc alloy tool rest, light and durable
- Can cut stainless steel, copper, aluminum and thin wall tubes up to 3mm
- Ensure complete cleaning during cutting. Spare blade inside handle
- After use, please keep clean and lubricate each part with light oil regularly

Utility Knife



Item NO.	Size	Chief	Handle width	Height	Scabbard thickness			RMB
CL613801	Monolithic	155	45	27	0.7	20/240	0.60	

- Plastic shell with metal blade guide rail, push button, with high carbon steel blade
- Precise grinding, argon quenching process, making the blade hard but not brittle, sharp and durable, especially suitable for cutting leather, rubber, plastic, decoration and other materials

Heavy duty pipe cutter



Item NO.	Size	Chief	Width	Height			RMB
CL609612	12-50mm	375	108	49.27	1/10	2.15	
CL609613	25-75mm	470	139	59.00	1/6	3.60	

- Malleable steel casting body, blade with special steel cutting wheel, protected by guide insert guide roller, 2 hardened guide roller, with wide ergonomic handle and long spindle concealed to adjust cutting pressure
- Used for cutting steel pipes and other pipes with wall thickness greater than 12mm

Utility Knife



Item NO.	Size	Chief	Handle width	Height	Scabbard thickness			RMB
CL613802	Monolithic	155	42	24	0.8	12/144	0.08	

- Plastic shell with metal blade guide rail, push button, SK5 quality blade
- Precise grinding, argon quenching process, making the blade hard but not brittle, sharp and durable, especially suitable for cutting leather, rubber, plastic, decoration and other materials

Pvc Pipe Cutter Blade




A

B

	Item NO.	Size	Applicable products	RMB
A	CL609842-1	42mm	CL609842	
B	CL609942-1	42mm	CL609942	

Single Blade Utility Knife

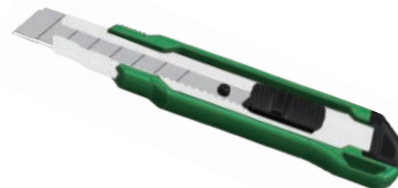

Item NO.	Size	Chief	Handle width	Height	Scabbard thickness			RMB
CL613809	Monolithic	158	35	20	0.7	24/288	0.06	

- Metal sheath, strong and durable
- The blade can be broken into small sections to prolong the life
- Front metal sheath protects the blade for safety

Three Blades Of Utility Knife



Item NO.	Size	Chief	Handle width	Height	Scabbard thickness			RMB
CL613803	Three	170	45	22	0.65	12/144	0.11	

- Metal sheath, heavy plastic blade, strong and durable
- The blade can be broken into small sections to prolong the life
- Front metal sheath protects the blade for safety
- The guide rail with blades is fixed in the clamping mechanism with 3 blades

Utility Knife



Item NO.	Size	Chief	Handle width	Height	Scabbard thickness			RMB
CL613807	Monolithic25mm	173	37	25	0.7	6/72	0.13	

- SK5 blade, sharp and durable
- Made of high-grade stainless steel, ABS plastic handle anti-slip design, comfortable feel

Utility Knife



Item NO.	Size	Chief	Handle width	Height	Scabbard thickness			RMB
CL613805	Five	155	42	24	0.8	12/144	0.12	

- Metal sheath, heavy plastic blade, strong and durable
- The blade can be broken into small sections to prolong the life
- Front metal sheath protects the blade for safety
- There are 5 blades fixed in the clamping mechanism with blade guide

Single Aluminum Alloy Utility Knife



Item NO.	Size	Chief	Handle width	Height	Scabbard thickness			RMB
CL613822	Monolithic9mm	145	35	13	0.55	6/72	0.03	

- Aluminum alloy fine art knife, body design beautiful and light
- Automatic self-locking push hand, safe and reliable, comfortable to use
- 30° black blade, sharp and durable
- Equipped with folding knife, easy to break the blade

Utility Knife



Item NO.	Size	Chief	Handle width	Height	Scabbard thickness			RMB
CL613806	Monolithic18mm	158	38	25	0.7	12/144	0.08	

- SK5 blade, sharp and durable
- High-grade stainless steel guide rail, ABS plastic handle anti-slip design, comfortable feel

Folded Utility Knife



Item NO.	Size	Chief	Handle width	Height			RMB
CL613825	Folding type	155	35	13	12/72	0.19	
CL613813	Blade				1/200		

- Internal blade locking, accurate use, safe and stable.
- SK5 blade, sharp and durable, long service life
- The blade body is made of zinc alloy material, with heavy hand feeling, foldable, easy to carry and safe after use



Zinc Alloy Utility Knife



Item NO.	Size	Chief	Handle width	Height			RMB
CL616701	Zinc alloy	175	35	26	12/72	0.19	

- The whole heavy-duty handle design saves labor
- The handle is made of high-strength zinc alloy, which is durable and has strong rust resistance
- The knife head is designed with push button, which is safe to use and adjusted by three gears, and easy to use
- Sharp and durable blade, with spare blade

18mm Blade



Item NO.	Size		RMB
CL613811	18X0.5mm	1/10/100/2400	

- Manufactured with special precision equipment, the blade material is high-quality alloy steel belt, precision grinding, argon quenching process is applied to make the blade hard but not brittle, sharp and durable, especially suitable for cutting leather, rubber, plastic, decoration and other materials.

L	B Handle width	H Height	b Width of each section	Head angle	Number of sections	W kg
100	18	0.5	5	60	15	0.0065

Zinc Alloy Utility Knife



Item NO.	Size	Chief	Handle width	Height			RMB
CL616702	Zinc alloy	155	35	13	12/144	0.06	

- The handle is made of high-strength zinc alloy, which is durable and has strong rust resistance
- The knife head is designed with push button, which is safe to use
- Three-way adjustment, easy to use, sharp and durable blade

T-series Blades



Item NO.	Size			RMB
CL613819	18X0.5mm	10/200/3000	3.45(10PCS)	

- Made of 75 # alloy steel, precision polished, sharp and durable.
- Suitable for cutting materials such as paper, leather, rubber, plastic, etc.

Folding Utility Knife



Item NO.	Length of expansion	Width	Blade			RMB
CL613826	165mm	25mm	60mm	10/60		

- Using SK5 blades, sharp and durable, with a long service life. The internal blades are precisely locked, safe and stable.
- Plastic scabbard, lightweight and durable, foldable and convenient to carry.
- Suitable for cutting soft rubber, carpets, glued wooden boards, cardboard, and other items.

9mm Blade



Item NO.	Size		RMB
CL613812	9X0.4mm	1/10/200/4000	

- Manufactured with special precision equipment, the blade material is high-quality alloy steel belt, precision grinding, argon quenching process is applied to make the blade hard but not brittle, sharp and durable, especially suitable for cutting leather, rubber, plastic, decoration and other materials.

L	B Handle width	H Height	b Width of each section	Head angle	Number of sections	W kg
80	9	0.4	5	60	13	0.0020

9mm Blade



Item NO.	Size		RMB
CL613815	9X0.4mm	1/10/100/5000	

• Manufactured with special precision equipment, the blade material is high-quality alloy steel belt, precision grinding, argon quenching process is applied to make the blade hard but not brittle, sharp and durable, especially suitable for cutting leather, rubber, plastic, decoration and other materials.


L	B Handle width	H Height	b Width of each section	Head angle	Number of sections	W kg
71	9	0.4	8	30	7	0.0015

G16 Pruning Shears (Bend)




Item NO.	Size		RMB
CL612911	Bend	12/72	

• Made of stainless steel blade and hardened by high-frequency fired, rust resistant and wear resistant
• Curved arc shape shear fixed not sliding, the handle is made of high quality aluminum alloy, comfortable and durable
• Cutting is labor-saving, used for pruning, shelving and harvesting fruit trees



L2	L1	L	B	H Height	Maximum opening	W kg
1	54	185	50.00	20.30	38.00	0.195

Black Sk4 Blade



Item NO.	Size		RMB
CL613818	18X0.5mm	1/10/200/2400	

• Manufactured with special precision equipment, the blade is made of high quality SK5 steel, which is sharp and durable, especially suitable for cutting leather, rubber, plastic, decoration and other materials


L	B Handle width	H Height	b Width of each section	Head angle	Number of sections	W kg
100	18	0.5	5	60	15	0.0065

Pruning Shears




Item NO.	Size		RMB
CL612902	Pointy	12/60	

• Made of stainless steel blade, hardened by high frequency, rust-proof and wear-resistant, high-quality aluminum alloy handle, easy to shear, portable and practical, with safety buckle at the end
• Used for pruning, shelving and harvesting fruit tree branches



L2	L1	L	B	H Height	Maximum opening	W kg
128	63	202	54.00	15.00	23.00	0.210

Black Sk5 Blade



Item NO.	Size		RMB
CL613816	25X0.7mm	1/10/100/1200	

• Manufactured with special precision equipment, the blade is made of high quality SK5 steel, which is sharp and durable, especially suitable for cutting leather, rubber, plastic, decoration and other materials


L	B Handle width	H Height	b Width of each section	Head angle	Number of sections	W kg
125	25	0.7	12	60	8	0.0155

Pruning Shears



Item NO.	Size		RMB
CL612901	Curved	12/60	

It is made of stainless steel blade, which is hardened by high-frequency quenching and has the characteristics of anti-rust and wear-resistant. Curved arc model shear fixed without sliding, high quality aluminum alloy handle, shearing labor saving. The end with safety buckle, used for pruning fruit tree branches, rack, harvest fruit use



L2	L1	L	B	H Height	Maximum opening	W kg
126	67	205	53.00	15.00	38.00	0.195




G16 Pruning Shears



Item NO.	Size		RMB
CL613021	8"	12/72	

- Made of stainless steel blade and hardened by high-frequency fired, rust resistant and wear-resistant,
- Straight blade modeling shear, the handle is made of high-quality aluminum alloy, comfortable and durable
- Cutting is labor-saving, used for pruning, shelving and harvesting fruit trees




L2	L1	L	B	H Height	Maximum opening	W kg
138	65	210	67.00	20.00	38.00	0.270

Pruning Shears



Item NO.	Size		RMB
CL613009	9"	12/60	

- The blade is made of stainless steel and hardened by high-frequency fired, which is rust resistant and wear-resistant
- Curved arc shape shear fixed not sliding, the handle is made of high quality aluminum alloy, comfortable and durable
- Easy to cut, with safety buckle at the end, used for pruning fruit tree branches and flower branches




L2	L1	L	B	H Height	Maximum opening	W kg
137	74	223	58.00	13.80	38.00	0.320

G16 Pruning Shears (Straight)



Item NO.	Size		RMB
CL612912	Straight head	12/72	

- Made of stainless steel blade and hardened by high-frequency fired, rust resistant and wear-resistant,
- Straight blade modeling shear, the handle is made of high-quality aluminum alloy, comfortable and durable
- Cutting is labor-saving, used for pruning, shelving and harvesting fruit trees




L2	L1	L	B	H Height	Maximum opening	W kg
112	73	203	52.00	19.00	43.40	0.155

Dilute Fruit Shears



Item NO.	Size		RMB
CL612908	8"	12/120	

- High quality alloy steel material, easy trimming
- Rust-proof and wear-resistant, labor-saving connecting rod structure
- Used for fruit pruning, with non-slip handle and reset spring




L2	L1	L	B	H Height	Maximum opening	W kg
123	75	209	48.00	11.20		0.115

Professional Pruning Shears (Elbow)



Item NO.	Size		RMB
CL613008	8"	12/72	

- The blade is made of SK5 steel, hardened by high frequency quenching, rust-proof and wear-resistant, with curved arc shear and fixed without sliding, and high-quality aluminum alloy plastic coated handle
- Easy to cut, with safety buckle at the end, used for pruning, framing and harvesting fruit tree branches



L2	L1	L	B	H Height	Maximum opening	W kg
130	65	205	52.00	22.00	38.00	0.255

Telescopic Hedge Shear



Item NO.	Size		RMB
CL810412	12"	6/12	

- Made of high manganese steel blade, telescopic aluminum alloy handle
- Labor-saving anti-skid TPR material technical design, practical and beautiful
- Suitable for professional and home users to trim hedges



L2	L1	L	B	H Height	Maximum opening	W kg
330	225	625	225.00	62.00	370.00	1.545

Pruning Shears



Item NO.	Size		RMB
CL810501	29"	6/12	

- Made of high manganese steel blade, aluminum alloy handle, labor-saving ratchet wheel function, non-slip TPR material handle design
- Suitable for professional and home users to trim tall thick branches

L2	L1	L	B	H Height	Maximum opening	W kg
554	106	741	317.00	34.20	87.40	1.580

High Sticks Saw



Item NO.	Size			RMB
CL810601	Cutting head	1/12	0.86	
CL810611	Telescopic tube(3m)	1/12	0.64	

- Adopt 2 aluminum alloy expansion tubes, which can be adjusted according to the height of trees
- High quality aluminum alloy pipe is light in weight and easy to operate
- It is used to cut branches by pulling the rope gently, saving the trouble of climbing trees

Pruning Shears Retractable handle



Retractable handle

Item NO.	Size		RMB
CL810502	28-41"	12	

- Made of high manganese steel blade, telescopic aluminum alloy handle, labor-saving and durable, non-slip TPR material design
- Suitable for professional and home users to trim tall thick branches

L2	L1	L	B	H Height	Maximum opening	W kg
493	108	680	308.00	39.30	87.00	1.635

Plastic Handle Hand Saw



Item NO.	Size			RMB
CL810303	450mm	12/48	0.42	

- High manganese steel saw blade with sharp saw edge and fast saw speed
- Double edge grinding, high frequency hardening, high hardness
- New SOFT ABS handle with comfortable feel
- Suitable for cutting wood, plywood, PVC pipe and other materials

Garden shears



Item NO.	Size		RMB
CL810410	10"	12/24	

- Made of high manganese steel blade, surface treated with teflon
- Aluminum alloy handle, labor-saving anti-skid TPR material
- Suitable for professional and home users to trim hedges

L2	L1	L	B	H Height	Maximum opening	W kg
263	207	528	190.00	41.00	345.00	0.865

Waist Saw



Item NO.	Size			RMB
CL810101	270mm	6/36	0.48	

- The saw blade is made of 65 manganese steel, with grinding teeth on three sides and sharp high-frequency teeth
- The handle adopts new ABS material and is molded by secondary injection molding
- Ergonomic design, comfortable feel, beautiful and generous



VDE
绝缘



Removable waist saw



Item NO.	Size			RMB
CL810102	350mm	6/24	0.41	

- SK5 saw blade imported from Taiwan, hard chrome plated on blade surface, wear resistance and durability
- Three sides grinding tooth edge Angle 15°, high-frequency hardening, sharp teeth
- Removable handle for easy blade replacement
- Saw blades can be purchased separately

Plastic Handle Wall Panel Saw



Item NO.	Size			RMB
CL810104	210mm	20/200		

- Made of high-quality high manganese steel, it has high hardness, good toughness, and sharp and neat cutting.
- Sawtooth precision machining, fine grinding technology, uniform density, high cutting flatness, low resistance, no sawing, cutting speed Fast, easy and convenient to use.
- The handle adopts ergonomic design, making it comfortable to grip and not prone to fatigue after long-term use.

Folding Saw



Item NO.	Size			RMB
CL810201	180mm	6 / 48	0.48	

- Manganese steel saw blade, three-side grinding, high-frequency hardening, sharp teeth
- The cutting capacity is 50% faster than the ordinary saw blade, easy and fast to use, and the saw surface is smooth and beautiful
- The handle adopts secondary injection molding process, which makes it feel comfortable

Mini Hacksaw



Item NO.	Size			RMB
CL608906	6"	1/100	0.06	

- Made of aluminum, small and light, suitable for working in small Spaces
- Saw blade tooth marks are uniform and hardness is HRC58~60°

Wallboard Saw



Item NO.	Size			RMB
CL810103	230mm	20/200		

- Manganese steel saw blade, three-side grinding, high-frequency hardening, sharp teeth
- The cutting capacity is 50% faster than the ordinary saw blade, easy and fast to use, and the saw surface is smooth and beautiful
- The handle adopts secondary injection molding process, which makes it feel comfortable

Hacksaw



Item NO.	Size			RMB
CL608912	12"	6 / 36	0.47	

- Reasonable design of saw frame, strong locking device
- Heavy saw frame, saw blade cutting smooth, safe to use
- Aluminum saw frame can install saw blade at 90° / 55° angles

Hacksaw



Item NO.	Size			RMB
CL609012	12"	10/40	0.65	

- The saw frame is retractable and suitable for a variety of saw blades
- Comfortable handle, labor-saving economy
- Smooth saw blade cutting and good toughness


Hacksaw



Item NO.	Size			RMB
CL617412	12"	10/40	0.69	

- Made of alloy steel, solid handle design, comfortable and labor-saving
- Attached is a metal saw blade, which is consumable and more practical with long deer saw blade
- Used for sawing metal sheet, steel pipe, wood, PVC pipe and other materials

Plastic Handle Saw Frame

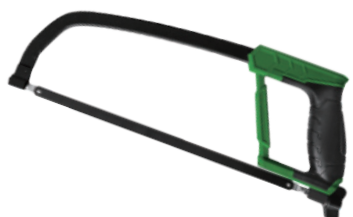

Item NO.	Size			RMB
CL619312	12"	6/36		

- This product adopts the full hacksaw body, which is durable and durable. The TPR coated handle is comfortable to grip.
- Equipped with 24t saw blade, easy to replace and labor-saving, suitable for cutting wood and metal.
- The saw blade can be loaded at 45 / 90 ° and is suitable for multi angle cutting.

T-series Telescopic Saw Frame



Item NO.	Size			RMB
CL609022	12"	10/40		

- Metal saw frame, sturdy and durable, surface spray treated, beautiful and rust proof.
- Adopting a scalable structure, it can adapt to 8-inch, 10 inch, and 12 inch saw blades, and can be replaced anytime and anywhere, suitable for various needs.
- High carbon steel saw blade, blackening process, good toughness, and smooth cutting.



KNOCKING TRIMMING TOOL





Claw Hammer With Rubber Handle



Item NO.	Size		RMB
CL607621	0.25KG	6/36	30.22
CL607622	0.55KG	6/18	
CL607623	0.75KG	6/18	

- High quality high carbon steel hammer, through special inlay technology, excellent anti-stripping performance
- The safety factor of steel at the edge of hammer head is greatly improved after special tempering treatment
- Double-color plastic coated fiber handle with strong structure, safe protection and comfortable handshake
- Used for smashing, nailing and nailing boards





Size	L	A	B	C	D	Stem length	W kg
0.25kg	283	25	43	103	40	245	0.410
0.55kg	341	31	58	138	45	292	0.795
0.75kg	347	35	59	155	45	292	0.965

Stoning Hammer With Rubber Handle



Item NO.	Size		RMB
CL607712	1000g	6/24	
CL607713	1250g	6/24	
CL607714	1500g	6/12	

- The hammer head is made of high carbon steel forging, precision forging and heat treatment
- The surface after special tempering treatment, not only high strength and impact resistance
- Hammer head and handle are processed by special embedding process, which are not easy to fall off
- Plastic-coated fiber handle, safe and labor-saving for heavy percussion applications




Size	L	A	B	C	D	Stem length	W kg
1000g	286	40	40	95	45	245	1.205
1250g	285	42	42	99	45	243	1.435
1500g	285	45	45	109	45	238	1.760

Ball Pein Hammer With Rubber Handle



Item NO.	Size		RMB
CL608011	1P	6/48	
CL608012	1.5P	6/18	
CL608013	2P	6/18	
CL608014	2.5P	6/24	

- High quality high carbon steel conical hammer head, through special inlaying process, excellent anti-stripping performance
- The hammer head is polished on both sides, and the safety factor of steel at the edge of the hammer head is greatly improved by special tempering treatment
- Plastic-coated handle with ergonomic design and comfortable feel
- Can be used for forging workpiece, metal shaping, hammering, hammering, etc





Size	L	A	B	C	D	Stem length	W kg
1P	326	28	28	100	41	289	0.600
1.5P	336	32	31	111	41	294	0.750
2P	376	35	34	124	46	331	1.065
2.5P	377	39	36	130	46	328	1.205

Octagonal Hammer With Rubber Handle



Item NO.	Size		RMB
CL616412	2P	6/12	49.77
CL616413	3P	6/12	
CL616414	4P	6/12	

- The hammer head is made of high carbon steel forged and heat treated
- The surface is treated by special tempering, not only high strength but also impact resistance
- Hammer head and handle are processed by special embedding process, which are not easy to fall off
- Fiber handle, strong structure, safe protection and labor-saving



Size	L	A	B	C	D	Stem length	W kg
2P	332	36	36	108	41	295	1.110
3P	375	41	41	118	45	330	1.590
4P	383	45	45	132	45	335	2.115





Fitter's Hammer With Rubber Handle



Item NO.	Size		RMB
CL608111	300g	6/48	
CL608112	500g	6/24	
CL608113	800g	6/24	
CL608114	1000g	6/24	

- The hammer head is made of high carbon steel forging, precision forging and heat treatment
- The surface is treated by special tempering, not only high strength but also impact resistance
- Hammer head and handle are processed by special embedding process, which are not easy to fall off
- Plastic-coated fiber handle with strong structure, safe protection and labor-saving





Size	L	A	B	C	D	Stem length	W kg
300g	322	23	6	104	41	298	0.475
500g	330	28	8	115	41	300	0.675
800g	364	32	8	129	46	331	1.055
1000g	365	37	10	131	46	326	1.270

Claw Hammer With Wooden Handle



Item NO.	Size		RMB
CL607201	0.25KG	6/48	
CL607202	0.50KG	6/36	
CL607203	0.75KG	6/36	

- The arbor handle is comfortable.
- Used for smashing, nailing and nailing boards



Size	L	A	B	C	D	Stem length	W kg
0.25KG	290	108	13	36	29	250	0.350
0.50KG	330	132	30	45	34.5	280	0.625

Ball Pein Hammer With Rubber Handle



Item NO.	Size		RMB
CL608002	1.5LB	6/36	
CL608004	2.5LB	6/24	



- High quality high carbon steel conical hammer head, through special inlaying process, excellent anti-stripping performance
- The hammer head is polished on both sides, and the safety factor of steel at the edge of the hammer head is greatly improved by special tempering treatment
- Plastic-coated handle with ergonomic design and comfortable feel
- Can be used for forging workpiece, metal shaping, hammering, etc

Ball Pein Hammer With Wooden Handle



Item NO.	Size		RMB
CL607801	1LB	6/48	
CL607802	1.5LB	6/36	
CL607803	2LB	6/24	
CL607804	2.5LB	6/24	

- High quality high carbon steel conical hammer head, through special inlaying process, excellent anti-stripping performance
- The hammer head is polished on both sides, and the safety factor of steel at the edge of the hammer head is greatly improved by special tempering treatment
- Arbor handle, comfortable to shake hands, can be used for forging workpiece, metal shaping, hammering, nailing, etc





Size	L	A	B	C	D	Stem length	W kg
1LB	326	100	30	26	31	290	0.550
1.5LB	347	113	33.8	31	33	304	0.765
2LB	363	125	38.5	34	35	315	1.040
2.5LB	383	135	40	37	36	331	1.255

With Magnetic Anti-slip Claw Hammer



Item NO.	Size		RMB
CL616511	0.25KG	6/48	
CL616512	0.50KG	6/36	

- High quality high carbon steel hammer, through special inlay technology, excellent anti-stripping performance
- The safety factor of steel at the edge of hammer head is greatly improved after special tempering treatment
- Double-color plastic coated fiber handle with strong structure, safe protection and comfortable handshake
- The hammer head with strong magnetic and iron nail adsorption tank can be used to nail without hand support to avoid hand injury





Size	L	A	B	C	D	Stem length	W kg
0.25kg	282	26	40	105	40	243	0.425
0.5kg	342	30	54	132	45	293	0.740

Steel Tube Handle Claw Hammer



Item NO.	Size		RMB
CL607321	0.25KG	6/36	
CL607322	0.50KG	6/36	
CL607323	0.75KG	6/36	

- High quality high carbon steel hammer, through special inlay technology, excellent anti-stripping performance
- The safety factor of steel at the edge of hammer head is greatly improved after special tempering treatment
- Used for smashing, nailing and nailing boards





Size	L	A	B	C	D	Stem length	W kg
0.25kg	275	108	25.6			234	
0.5kg	340	30	54	129	33	290	0.840
0.75kg	342	33	52	146	33	287	0.965

Prolonged Handle Shockproof Magnet Claw Hammer




Item NO.	Size		RMB
CL616521	100Z	6/24	
CL616522	130Z	6/24	

- High quality high carbon steel hammer, through special inlay technology, excellent anti-stripping performance
- The safety factor of steel at the edge of hammer head is greatly improved after special tempering treatment
- Double-color plastic coated fiber handle with strong structure, safe protection and comfortable handshake
- The hammer head with strong magnetic and iron nail adsorption tank can be used to nail without hand support to avoid hand injury



Size	L	A	B	C	D	Stem length	W kg
100Z	400	125	24	18	44	355	0.545
130Z	401	139	26	28	45	358	0.650

Steel Tube Handle Ball Hammer



Item NO.	Size		RMB
CL607311	1.5P	6/36	
CL607313	2.5P	6/24	

- High quality high carbon steel conical hammer head, through special inlaying process, excellent anti-stripping performance
- The hammer head is polished on both sides, and the safety factor of steel at the edge of the hammer head is greatly improved by special tempering treatment
- Can be used for forging workpiece, metal shaping, knocking, etc





Steel Tube Handle Aniseed Hammer



Item NO.	Size		RMB
CL607302	2P	6/36	
CL607303	3P	6/24	
CL607304	4P	6/12	

- Hammer head made of high quality carbon steel, impact resistant
- Can be used for forging workpiece, metal shaping, hammering and other heavy percussion operations



Size	L	A	B	C	D	Stem length	W kg
2P	299	39	39	104	33	260	1.200
3P	332	45	45	113	34	288	1.700
4P	334	46	46	126	33	286	1.975

Aniseed Hammer



Item NO.	Size		RMB
CL607908	8LB	8	
CL607910	10LB	6	
CL607912	12LB	6	
CL607914	14LB	4	
CL607916	16LB	4	
CL607918	18LB	4	
CL607920	20LB	4	



- Comply with QB/T 1290.1 standard manufacturing requirements
- Hammer head made of high quality carbon steel, impact resistant
- Can be used for forging workpiece, metal shaping, hammering and other heavy percussion operations

Octagonal Hammer With Plastic Coated Fiber Handle



Item NO.	Size		RMB
CL617006	6P	6	
CL617008	8P	6	
CL617010	10P	6	
CL617012	12P	4	
CL617014	14P	4	
CL617016	16P	4	

- Hammer head made of high quality carbon steel, impact resistant
- Can be used for forging workpiece, metal shaping, hammering and other heavy percussion operations



Size	L	A	B	C	D	Stem length	W kg
6P	888	55*53	55*53	151	41	826	3.635
10P	895	63*61	63*61	176	41	826	5.545
12P	895	64*61	64*61	176	41	826	5.545
16P	905	73*70	73*70	186	41	826	7.265
18P	906	77*75	77*75	210	41	826	8.995

Mounted Hammer With Rubber Handle




Item NO.	Size		RMB
CL610130	30MM	6/48	
CL610135	35MM	6/48	
CL610140	40MM	6/24	

- Hammer head made of polyurethane material, soft translucent
- With proper hardness, it will not be deformed or broken when struck
- Hammer head is replaceable, knock resistant, oil resistant, skid resistant and flame retardant
- Tips: Plastic hammer heads can be sold separately

Size	L	A	B	C	D	Stem length	W kg
30mm	267	82	27	27	31	238	0.310
35mm	271	91	30	30	31	237	0.415
40mm	295	99	35	35	34	258	0.555

Rubber Hammer(WHITE)

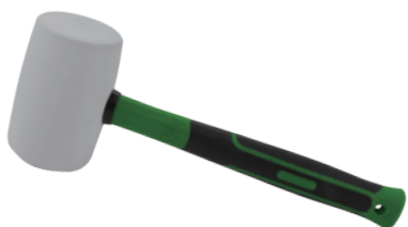

Item NO.	Size		RMB
CL618211	500g	6/48	
CL618212	750g	6/36	
CL618213	1000g	6/36	

- The hammer head is made of pure natural rubber, with excellent performance, good elasticity, environmental protection, non-toxic, tasteless, low temperature resistance, oxidation resistance and long service life
- Fiber coated plastic handle, comfortable and durable

Size	L	A	B	C	D	Stem length	W kg
500g	320	56	56	101	34	260	0.615
750g	343	65	65	113	39	276	0.945
1000g	346	71	71	125	39	273	1.235

Rubber Shock Proof Hammer



Item NO.	Size		RMB
CL607403	45MM	10/40	
CL607404	50MM	8/32	
CL607406	60MM	6/24	

- Inelastic rubber hammer (Champagne hammer) is fitted with patented steel bone structure inside
- The exterior is carefully designed with advanced rubber technology and special formula, which does not damage the percussion surface
- Internal steel ball, will not cause rebound special hammer, mostly used in automotive sheet metal and mechanical maintenance and other industries

Size	L	A	B	C	D	Stem length	W kg
45mm	306	45	45	92	36	260	0.645
50mm	323	50	50	105	45	273	0.895
60mm	373	60	60	116		320	1.350

Rubber Hammer(BLACK)



Item NO.	Size		RMB
CL618201	500g	6/48	
CL618202	750g	6/36	
CL618203	1000g	6/36	

- The hammer head is made of pure natural rubber, with excellent performance, good elasticity, environmental protection, non-toxic, tasteless, low temperature resistance, oxidation resistance and long service life
- Fiber coated plastic handle, comfortable and durable

Size	L	A	B	C	D	Stem length	W kg
500g	317	58	58	101	36	258	0.585
750g	342	63	63	111	41	279	0.785
1000g	348	66	66	127	39	278	0.955

Axe



Item NO.	Size		RMB
CL618101	600g	6/36	

- High quality high carbon steel precision forging, edge heat treatment.
- Overall tempering treatment, high hardness, strong toughness, sharp edge.
- Using fiber handle, special inlay technology, the handle is not easy to fall off.



6PCS File Set



Item NO.	Size			RMB
CL612601	3X150	12/72		
CL612602	4X160	12/72		
CL612603	5X180	12/72		

• Configuration:
square file, round file, half round file, triangle file, flat file, pointed file

Square File



Item NO.	Size			RMB
CL612641	6"	12/72	0.12	
CL612642	8"	12/72	0.17	
CL612643	10"	12/72	0.26	
CL612644	12"	10/40	0.38	

- The file is forged with high hardness steel containing chromium and manganese elements
- The shape of the file teeth is the same, and the file is stable and fast
- Special heat treatment coating on the surface of file teeth, durable and wear-resistant
- Two-color soft adhesive handle, comfortable and anti-skid

6pcs File Set



Item NO.	Size			RMB
CL612701	3X150	12/72		
CL612702	4X160	12/72		
CL612703	5X180	12/72		

• Configuration:
square file, round file, half round file, triangle file, flat file, pointed file

Round File



Item NO.	Size			RMB
CL612651	6"	12/72	0.11	
CL612652	8"	12/72	0.16	
CL612653	10"	12/72	0.22	
CL612654	12"	10/40	0.34	
CL612655	14"	10/40	0.48	

- The file is forged with high hardness steel containing chromium and manganese elements
- The shape of the file teeth is the same, and the file is stable and fast
- Special heat treatment coating on the surface of file teeth, durable and wear-resistant
- Two-color soft adhesive handle, comfortable and anti-skid

Flat File



Item NO.	Size			RMB
CL612611	6"	12/72	0.15	
CL612612	8"	12/72	0.22	
CL612613	10"	12/72	0.36	
CL612614	12"	10/40	0.50	
CL612615	14"	10/40	0.74	

- The file is forged with high hardness steel containing chromium and manganese elements
- The shape of the file teeth is the same, and the file is stable and fast
- Special heat treatment coating on the surface of file teeth, durable and wear-resistant
- Two-color soft adhesive handle, comfortable and anti-skid

Semicircle File



Item NO.	Size			RMB
CL612621	6"	12/72	0.15	
CL612622	8"	12/72	0.22	
CL612623	10"	12/72	0.34	
CL612624	12"	10/40	0.66	
CL612625	14"	10/40	0.65	

- The file is forged with high hardness steel containing chromium and manganese elements
- The shape of the file teeth is the same, and the file is stable and fast
- Special heat treatment coating on the surface of file teeth, durable and wear-resistant
- Two-color soft adhesive handle, comfortable and anti-skid

Triangle File



Item NO.	Size			RMB
CL612631	6"	12/72	0.15	
CL612632	8"	12/72	0.22	
CL612633	10"	12/72	0.33	
CL612634	12"	10/40	0.46	

- The file is forged with high hardness steel containing chromium and manganese elements
- The shape of the file teeth is the same, and the file is stable and fast
- Special heat treatment coating on the surface of file teeth, durable and wear-resistant
- Two-color soft adhesive handle, comfortable and anti-skid

Pin Punch



Item NO.	Size			RMB
CL612801	2X150mm		0.06	
CL612802	3X150mm		0.06	
CL612803	4X150mm		0.06	
CL612804	5X150mm		0.06	
CL612805	6X150mm		0.10	
CL612806	8X150mm		0.10	

- Octagonal cone mandrel hardened by oil
- high strength and good toughness, hardness HRC58°±2°
- The surface is chrome plated with strong rust resistance
- Used for positioning in machinery or bench work, abrasive tool manufacturing and subsequent processing

5pcs File



Item NO.	Size			RMB
CL612661	8"	24	0.96	

- The file is forged with high hardness steel containing chromium and manganese elements
- The shape of the file teeth is the same, and the file is stable and fast
- Special heat treatment coating on the surface of file teeth, durable and wear-resistant.
- Two-color soft adhesive handle, comfortable and anti-skid

Chisel



Item NO.	Size			RMB
CL613504	4mm	10/200	0.06	
CL613505	5mm	10/100	0.06	

- Octagonal cone mandrel hardened by oil
- High strength and good toughness
- The surface is chrome plated with strong rust resistance
- Used for machining of machinery or parts, so as to facilitate the leading position in subsequent processing

13pcs Chisel Set



Pin punch: 2X150 3X150 4X150 5X150 6X150 8X150
 Flat chisel : 18X175 15X150 12X130
 Center punch: 5X150 4X120
 Conical punch : 3X120
 Bore bit: 5X130

Item NO.	Size			RMB
CL613013	13PCS	8	1.25	

- The surface is chrome plated with strong rust resistance
- Used for positioning in machinery or bench work, abrasive tool manufacturing and subsequent processing

Chisel



Item NO.	Size			RMB
CL612309	90mm	30/200	0.06	
CL612312	120mm	50/200	0.08	
CL612315	150mm	50/200	0.13	

- High strength and good toughness
- The surface is treated by electrophoresis, with strong rust resistance
- Used for machining of machinery or parts, so as to facilitate the leading position in subsequent processing



5pcs Chisel Set



Item NO.	Size	Weight	Volume	RMB
CL613005	5PCS			

- It is made of 60cr-v chrome vanadium steel and is subject to overall heat treatment
- The mirror surface is chrome plated, suitable for machinery maintenance, abrasive manufacturing, fitter and other industries

Woodworking Planer



Item NO.	Size	Weight	Volume	RMB
CL619144	44X185X3.0	10/200		
CL619151	51X185X3.0	10/200		

- It is made of high-quality alloy steel, forged and forged, and the edge is fired and ground flat
- Sharp blade, smooth and durable, long service life

Chisel



Item NO.	Size	Weight	Volume	RMB
CL613401	3/8"	12/60	0.15	17.62
CL613402	1/2"	12/60	0.16	17.78
CL613403	5/8"	12/60	0.18	17.95
CL613404	3/4"	12/60	0.21	18.35
CL613405	1"	12/60	0.22	18.72
CL613406	1-1/4"	12/60	0.28	26.62
CL613407	1-1/2"	12/60	0.31	29.57

- The cutter bar is forged with 65# steel and heat treated as a whole
- The blade is finely polished and durable, and can be repeatedly sharpened to make it sharp
- Monochrome adhesive handle, beautiful and comfortable

Pin Punch



Item NO.	Size	Weight	Volume	RMB
CL611801	16X300mm	4/20	0.58	
CL611802	18X300mm	4/24	0.69	

- Made of chrome-vanadium steel, special three-layer deep treatment process, strong impact resistance
- Suitable for construction, decoration and stone processing industries

Woodworking Chisel



Item NO.	Size	Weight	Volume	RMB
CL613411	3/8"	12/72		
CL613412	1/2"	12/72		
CL613413	5/8"	12/72		
CL613414	3/4"	12/72		
CL613415	1"	12/72		
CL613416	1-1/4"	12/72		
CL613417	1-1/2"	12/72		

- The cutter bar is made of high-quality alloy steel and precision forged by steel, and the overall heat treatment is carried out.
- The blade is finely polished and durable. It can be repeatedly polished to make it sharp.
- Two color handle, comfortable to handle.

Pin Punch



Item NO.	Size	Weight	Volume	RMB
CL611701	22X16X300mm	6/24	0.61	
CL611702	26X18X300mm	6/24	0.72	

- Chrome-vanadium steel manufacturing, humanized design, special three-layer deep processing technology, strong impact resistance
- Suitable for construction, decoration and stone processing industries

Pin Punch



Item NO.	Size			RMB
CL613215	15X150mm	10/100	0.13	
CL613218	18X175mm	10/50	0.20	
CL613220	20X200mm	5/60	0.30	
CL613222	22X250mm	6/24	0.59	

- Forged with 60Cr-V chromium vanadium steel, with high strength and good toughness.
- Used for slotting, welding slag removal, shaping, engraving and other work

6 Pcs Pin Punch



Item NO.	Size			RMB
CL613106	6PCS	5/25	0.41	

- Meet DIN 6458 D standard manufacturing requirements
- The surface is sprayed with green plastic, and the 60CR-V integral heat treatment is adopted;The hardness of punching head is HRC48-58, and the hardness of tail is GRC32-46 after tempering
- Used for mechanical processing and maintenance, fitter and mold manufacturing

Pin Punch: 1.5X6X150 4X8X150 6X10X150
3X8X150 5X8X150 8X10X150

Pin Punch



Item NO.	Size			RMB
CL613316	16X10X150mm	10/100	0.16	
CL613317	17X11X175mm	10/50	0.21	
CL613320	20X12X200mm	10/50	0.31	
CL613323	23X13X250mm	10/30	0.48	

- Forged with 60Cr-V chromium vanadium steel, with high strength and good toughness
- Used for slotting, welding slag removal, shaping, engraving and other work

3pcs Pin Punch



Item NO.	Size			RMB
CL613103	3PCS	16	1.20	145.20

- Chromium vanadium steel manufacturing, integrated heat treatment
- Suitable for construction, decoration and stone processing industries

12pcs Pin Punch



Conical punch: 2X10X140
Central punch: 6X10X100, 8X11X115
Flat chisel: 10X8X140, 12X10X150,
16X12X170
Cylindrical punch: 1.5X6X150, 3X8X150,
4X8X150, 5X8X150,
6X10X150, 8X10X150

Item NO.	Size			RMB
CL613112	12PCS	5/10	1.00	

- Forged with 60Cr-V chromium vanadium steel, with high strength and good toughness
- Surface spray green plastic, 60CR-V, integral heat treatment;Punch hardness HRC48-58°, tail hardness HRC32-46°
- Used for mechanical processing and maintenance, fitter and mold manufacturing

6 PCS Pin Punch



Flat chisel 16X16X200mm 13X13X175mm
10X10X165mm
Cylindrical punch 4.8X10X150mm
Center punch 4.8X10X150mm
Cone punch 4.8X10X150mm

Item NO.	Size			RMB
CL611506	6PCS	10/20	1.22	


- Comply with DIN 7254 A, B DIN 6254 standard manufacturing requirements
- Forged with 60Cr-V chromium vanadium steel, with high strength and good toughness
- Suitable for construction, decoration and stone processing slotting, welding slag removal, shaping, carving and other industries



MEASURING TOOLS




Ultra Wide Measuring Tape




Item NO.	Size		RMB
CL706542	5mX22mm	12/120	
CL706543	5mX28mm	12/120	

- The overall structure adopts an ultra small design, which is comfortable to grip and convenient to carry.
- Widened and thickened tape, in compliance with JIS Level 1 accuracy standards, with clear printing and precise measurement.




Size	L	B	H	W kg
5mx22mm	59.84	41.21	63.76	0.207
5mx28mm	60.25	47.47	64	0.270

T Type Measuring Tapes

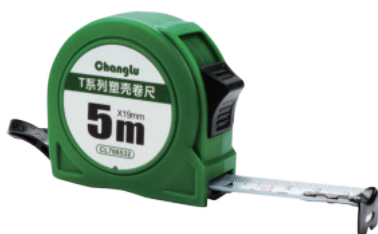


Item NO.	Size		RMB
CL706532	5mx19mm	12/180	
CL706532(B)	5mx19mm(B)	12/180	
CL706533	5mx25mm	12/120	
CL706534	7.5X25mm	12/72	
CL706535	10mX25mm	12/72	

- Second level precision tape, using sturdy and practical ABS plastic casing
- Clear and easy to read ruler with brake and automatic return buttons and stainless steel ruler hook
- Suitable for measuring home decor, water and electricity, and woodworking. Portable measuring tools for experts



Size	L	B	H	W kg
5mx19mm	63	36	61	0.160
5mx25mm	63	41	61	0.205
7.5mx25mm	78	41.5	75	0.315
5mx19mm	72.5	39.5	73	0.210

Plastic Casing Measuring Tapes



Item NO.	Size		RMB
CL706302	5mX19mm	12/120	

- 2-level precision printing of ruler belt, accurate calibration, high wear resistance
- Sturdy and practical ABS plastic shell covered with rubber sheath, strong and resistant to falling
- With brake and auto return buttons and stainless steel ruler hook, ruler belt is straight and strong
- High quality strong spring, durable, flexible ruler belt
- Side with locking device, ruler belt locking and unlocking more convenient

Plastic Measuring Tapes



Item NO.	Size			RMB
CL706312	5mX19mm	6/72	0.20	
CL706313	5mX25mm	6/72	0.25	
CL706314	7.5mX25mm	6/48	0.35	

- Transparent engineering plastic shell, durable.
- Nylon ruler belt is straight and strong, with automatic zeroing device.
- High quality strong spring, durable, flexible ruler belt.

Professional Grade Thicken Ruler Measuring Tapes



Item NO.	Size			RMB
CL706522	5mX19mm	12/120		
CL706523	5mX25mm	6/72	0.26	
CL706524	7.5mX25mm	6/48	0.41	

- New ABS engineering plastic shell, 0.135mm thick ruler belt, strong and durable
- The ruler belt is made of high-quality steel, straight and strong, with special surface treatment and clear scale
- High quality strong spring, durable, flexible ruler belt




G13 Type Measuring Tapes



Item NO.	Size		RMB
CL706515	3mX16mm	12/180	
CL706512	5mX19mm	12/120	
CL706513	5mX25mm	12/120	
CL706514	7.5mX25mm	12/72	
CL706516	10mX25mm	12/60	

- Second level precision ruler belt with solid practical ABS plastic case
- The ruler tape is legible with brake and auto return buttons and stainless steel ruler hook
- Used for measuring good measuring tools for decorative home, water and electricity, carpentry experts




Size	L	B	H	W kg
3mX16mm	57	35	56	0.100
5mX19mm	67	38.5	67	0.175
5mX25mm	67	44	66	0.230
7.5mX25mm	79	45	80	0.345
10mX25mm	79	45	79	0.405

"LUBAN" Type Measuring Tapes



Item NO.	Size		RMB
CL706517	5mX19mm	12/120	

- Second level precision ruler belt with solid practical ABS plastic case
- The ruler tape is legible with brake and auto return buttons and stainless steel ruler hook
- Used for measuring good measuring tools for decorative home, water and electricity, carpentry experts



Size	L	B	H	W kg
5mX19mm	67	39	68	0.170

T-Type Fiberglass Measuring Tapes



Item NO.	Size	Band thickness			RMB
CL713810	10m	37-39	60		
CL713820	20m	37-39	60		
CL713830	30m	37-39	60		
CL713850	50m	37-39	40		

- The ruler shell is made of brand new ABS material, which is sturdy and durable.
- PVC+fiberglass tape, anti tensile, wear-resistant, and not easily broken.
- Meets the national second level accuracy standard.
- The ruler tape is printed in metric and imperial systems, making it easy to use.

Cassette steel tape measure



Item NO.	Size	Long	Wide	High			RMB
CL708420	20m	121	111	29.5	10/40	0.50	65.08
CL708430	30m	121	112.5	28	10/40	0.67	76.91
CL708450	50m	151	137	29	6/24	1.01	102.30

- 2-level precision printing of ruler belt, accurate calibration, high wear resistance
- Sturdy and practical ABS plastic shell covered with rubber sheath, strong and resistant to falling.
- One-piece hand handle, comfortable to use, labor-saving, convenient storage

Rack tape measure



Item NO.	Size	Long	Wide	High			RMB
CL706430	30m	290	150	45	20	0.72	
CL706450	50m	320	180	45	20	1.04	

- Engineering plastic shell, strong and durable, comfortable to hold
- Nickel plated ruler belt, more wear-resistant
- Widely used in general mapping, road, railway, bridge, construction and other projects

Rack tape measure



Item NO.	Size	Long	Wide	High	Weight	Volume	RMB
CL706130	30mm	285	155	45	20	0.94	
CL706150	50mm	315	180	45	20	1.34	
CL706100	100mm	350	210	45	10	2.13	

- Reinforced all-steel case, strong and durable, comfortable to hold
- Nickel plated ruler belt, more wear-resistant
- Widely used in general mapping, road, railway, bridge, construction and other projects

Aluminum Alloy Level Ruler



Item NO.	Size	Long	Wide	High	Weight	Volume	RMB
CL706607	600mm	600	23	59	30	0.49	
CL706608	800mm	800	23	59	30	0.64	
CL706609	1000mm	1000	23	59	30	0.77	

- Aluminum alloy, antistatic coating, strong magnetic design
- Used to test the horizontal and verticality of installed equipment

Rack Tape Measure With Plastic Case



Item NO.	Size	Long	Wide	High	Weight	Volume	RMB
CL712420	20m	270	200	65	1/24	0.59	
CL712430	30m	270	200	60	1/24	0.65	
CL712450	50m	340	250	70	1/20	1.05	

- Engineering plastic shell, strong and durable, comfortable to hold
- Fiber tape, stretching is not easy to deformation
- 5 times fast recovery, save time and effort

Folding Type Aluminum Alloy Level Ruler



Item NO.	Size	Long	Wide	High	Weight	Volume	RMB
CL706651	600mm	600	21	53	30	0.64	

- Two dimensional synchronous measurement, saving time and effort.
- High precision blue blister, epoxy adhesive fixed base, stable blister, can keep accurate reading for a long time.
- High quality aluminum alloy material, strong and durable, surface oxidation treatment, antifouling, rust and wear resistance.
- Strong magnetic belt, can adsorb iron metal surface, no need to hold hands during measurement, can improve stability and accuracy.

Aluminum Alloy Level Ruler



Item NO.	Size	Long	Wide	High	Weight	Volume	RMB
CL706631	300mm	300	50	22	60	0.21	26.15
CL706632	400mm	400	49	21	60	0.20	28.14
CL706633	500mm	500	49	21	60	0.25	30.87
CL706634	600mm	600	49	21	60	0.28	32.76
CL706635	800mm	800	49	21	60	0.29	38.43
CL706636	1000mm	1000	49	21	60	0.34	43.68

- Aluminum alloy, antistatic coating, strong magnetic design
- Used to test the horizontal and vertical adjustment of installed equipment

High Precision Aluminum Alloy Level Ruler



Item NO.	Size	Long	Wide	High	Weight	Volume	RMB
CL706641	600mm	600	26	66	30	0.68	
CL706642	800mm	800	26	66	30	0.84	
CL706643	1000mm	1000	26	66	30	0.98	

- Made of aluminum alloy, antistatic coating
- Used to test the horizontal and vertical adjustment of installed equipment
- The ruler body is made of thickened aluminum alloy, and it is not easy to deform window machines subjected to external forces
- Plastic-sprayed surface treatment, fine milling bottom surface, wear-resistant, corrosion-resistant, durable
- Both ends of the ruler body are protected by soft glue and ABS (architecture patent), which is not easy to fall off during use. The handle is elastic and more impact-resistant, so as to better protect the product after falling



VDE
绝缘




Mechanical Type Vernier Calipers



Item NO.	Size		RMB
CL713215	150mm	1/50	

- Made of high quality carbon steel, heat treated and the measurement surface hardened
- 4 measurement methods: outside diameter, inside diameter, step and depth
- Shockproof dial displays precise values




Measuring range	Accuracy	L	B	A	C	D	d	W kg
0-150mm	0.02	231	78.61	40.37	16.44	15.77	3.21	0.255

Vernier Calipers



Item NO.	Size		RMB
CL710912	125mm	50	
CL710915	150mm	50	
CL710920	200mm	40	
CL710930	300mm	30	

- Made of high quality 65 high carbon steel, heat treated, the surface of the measuring body hardened
- Precision display of laser scale, precision 0.02
- With fastening screw, accurate locking reading
- 4 measurement methods: outside diameter, inside diameter, step and depth




Measuring range	Accuracy	L	B	A	C	D	d	W kg
0-125mm	0.02	211	76.50	39.83	15.52	15.99	3.15	0.285
0-150mm	0.02	235	76.65	39.90	16.01	15.94	3.42	0.310
0-200mm	0.02	299	85.40	46.66	18.59	16.02	3.13	0.440
0-300mm	0.02	416	107.08	59.87	22.59	18.45	3.45	0.795

Digital Vernier Calipers



Item NO.	Size		RMB
CL711015	150mm	1/50	

- Large display screen, with power switch, zero clearance at any position, metric inch conversion
- Precision display value, precision 0.01
- Tighten the screw to lock the reading accurately
- 4 measurement methods: outside diameter, inside diameter, step and depth
- It has the function of direct measurement and comparison measurement




Measuring range	Accuracy	L	B	A	C	D	d	W kg
0-150mm	0.01	234	76.90	40.70	16.18	15.95	3.40	0.310

Vernier Calipers With Manometer




Item NO.	Size		RMB
CL711115	150mm	1/50	

- Made of high quality 65# carbon steel, heat treated, the measurement surface hardened
- 4 measurement methods: outside diameter, inside diameter, step and depth
- Shockproof dial displays precise values



Measuring range	Accuracy	L	B	A	C	D	d	W kg
0-150mm	0.02	233	77.10	39.45	16.72	15.98	6.70	0.345

Depth Vernier Calipers

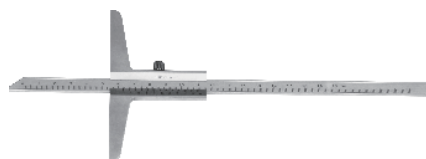

Item NO.	Size		RMB
CL711615	150mm		
CL711620	200mm	50	
CL711630	300mm	40	

- Made of stainless steel, surface hardened, scale matte finish, main scale slightly concave to prevent wear
- It is used to check and measure the size of sealing fit gap in the installation and maintenance of seals, and wooden box packaging is provided

Outside Micrometer



Item NO.	Size	📏	📦	RMB
CL711225	0-25mm	50		
CL711250	25-50mm	30	0.43	
CL711275	50-75mm	25	0.54	

- The measuring surface is made of hard alloy steel, and the cutting line is clear and easy to read, specially used for measuring the outer diameter size
- Ratchet force measuring device ensures constant measuring pressure and fasteners lock readings quickly and accurately
- Precision casting and plastic spraying ruler, high adhesion, precision 0.01
- Heat insulation protection plate on ruler can avoid the impact of human body temperature on accuracy, convenient and durable

Stainless Steel Angle Ruler



Item NO.	Size	📏	📦	RMB
CL707430	150mmX300mm	10/100	0.14	
CL707450	250mmX500mm	10/100	0.23	

- Made of cold rolled stainless spring steel, laser graduated, matte hardened surface
- Wear-resistant, non-reflective, double-sided scale, scale accuracy class II

Stainless Steel Ruler



Item NO.	Size	📏	📦	RMB
CL707015	150mm	10/500	0.02	
CL707030	300mm	10/300	0.05	
CL707050	500mm	10/200	0.11	
CL707010	1000mm	10/100	0.33	
CL707002	1500mm	10/30	0.69	
CL707003	2000mm	10/30	1.10	

- According to standard EC grade II
- Made of cold rolled stainless spring steel, matte finish, rounded edges, laser scale, double sided scale, metric scale on front and Inch scale on back
- Used for measuring length in testing workshops and routine work

Combination Angle Ruler



Item NO.	Size	📏	📦	RMB
CL712730	300mm	10/100	0.16	
CL712750	500mm	12/60	0.28	

- Ruler made of aluminum, surface matte passivation treatment
- Blister on handle for horizontal and vertical positioning
- Double-sided metric scale, accurate scale

Stainless Steel Angle Ruler



Item NO.	Size	📏	📦	RMB
CL707220	200mm	6/120	0.14	
CL707230	300mm	6/60	0.09	
CL707250	500mm	6/60	0.21	

- Stainless steel material, laser scale, matte hardened surface, wear-resistant and non-reflective.
- Double-sided scale, accurate scale, in line with GB standard.
- The handle is made of thickened aluminum alloy, which is durable and stable in standing

Combination Ruler



Item NO.	Size	📏	📦	RMB
CL707130	300mm	12/60	0.21	

- Used for Angle, length and height positioning in machining and wood molding
- The calibrated groove slide ruler is coated with anti-rust coating
- The handle is equipped with drawing needle and hand controlled measuring bubble, leveling device, aluminum alloy ruler seat is wear-resistant and deformable
- Used for mirror surface measurement of working right-angle correlation vertically and correlation parallelism



VDE
绝缘



Stainless Steel Triangular Rule



Item NO.	Size	Weight	Volume	RMB
CL712815	150mm	10/100	0.10	
CL712820	200mm	10/100	0.13	

- Made of spring stainless steel, accurate scale
- Aluminum base, strong and durable


Compass



Item NO.	Size	Weight	Volume	RMB
CL709615	150mm	150	0.12	
CL709620	200mm	50	0.16	
CL709625	250mm	50	0.31	
CL709630	300mm	50	0.36	
CL709640	400mm	14	0.64	
CL709650	500mm	20	0.73	

- Used in machine repair and mold drawing and making

Aluminum Alloy Triangular Rule

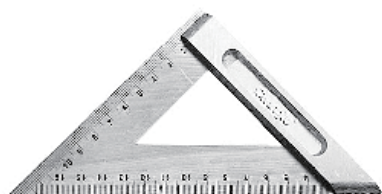

Item NO.	Size	Weight	Volume	RMB
CL703215	150mm	10/80		
CL703220	200mm	10/80		

- Stainless steel ruler body, aluminum alloy ruler base, durable

Feeler Gauge



Item NO.	Size	Weight	Volume	RMB
CL706201	100x10	10/300	0.04	
CL706202	100x14	10/300	0.05	
CL706203	100x17	10/300	0.05	
CL706204	150x14	10/100	0.10	
CL706205	150x17	10/100	0.11	
CL706206	200x14	10/100	0.14	
CL706207	200x17	10/100	0.15	
CL706209	300x17	10/50	0.30	
CL706210	500x20	1/20	0.87	
CL706211	1000x20	1/12	1.70	

- Plug is made of hard spring steel with specification identification code and nickel plated and polished
- Used to check and measure the size of sealing fit gap in the installation and maintenance of seals

Degree Rule



Item NO.	Size	Weight	Volume	RMB
CL707301	90X150mm	10/100	0.05	

- Made of 1.2mm stainless steel
- Used to detect the straightness and Angle of the workpiece

Elbow Feeler Gauge



Item NO.	Size	Weight	Volume	RMB
CL706221	100X16			

- The ruler is made of spring steel and has good toughness.
- Laser scale, clear and easy to read, durable and wear-resistant.
- The ruler can rotate 360 degrees, making it easy to expand and shrink, and convenient for storage.
- Elbow design, suitable for measuring gaps in narrow and special environments.
- Measurement range: 0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.50, 0.55, 0.60, 0.70, 0.75, 0.80, 0.90, 1.00

8PCS Brake Disc Thickness Gauges



Item NO.	Size	📏	📦	RMB
CL708208	8PCS		0.26	

Colour	Thickness	Size
Green	8、10、12mm	0.3150"-0.4724"
Yellow	4、5、6mm	0.1575"-0.2362"
Red	2、3mm	0.0787"-0.1181"

Multifunctional Slope Measuring Instrument



Item NO.	Size	📏	📦	RMB
CL713325	250mm	8/64		

- There are two ways to use it: measuring and setting the slope.
- The instrument body is made of ABS engineering plastic, which is easy to operate.
- Adopting high strength and simple level bubbles (double line water bubbles).
- Using a large digital dial for clearer clarity. Comparison table with slope and angle.

Laser Level



Item NO.	Size	📏	📦	RMB
CL706662	Two lines	8		
CL706663	Three lines	8		
CL706665	Five lines	8		

- It has 360° automatic leveling and laser line precision function
- Tilt Angle 3° alarm function, with bracket can be fixed
- Widely used in building home decoration and hanging decoration
- For indoor use, precise height positioning with construction

Digital Ranging Round



Item NO.	Size	📏	📦	RMB
CL710803	Digital display big wheel	5	1.90	

Product advantages:

1. The wheels are made of new ABS engineering plastics, outfitted with super-wear-resistant rubber leather, durable and high strength
2. Large LCD digital display, more convenient reading
3. Aluminum alloy pull rod, three joints telescopic, can be easily put into the backpack, easy to carry
4. The button can be waterproof and dustproof; Can be converted to male feet, with memory function; Blu-ray display that works well at night; Side brace foot, stable and reliable, easy to use.

Technical parameters:

Maximum measuring range: 99999.9 m / 99999.9 ft
 Measurement accuracy: $\pm 0.5\%$
 Minimum display value: 0.1m/0.5ft
 Suitable temperature: -10°C -- 45°C
 Wheel diameter: 318mm/12.5"
 Measurement unit: m/in
 Battery: Two size 7 (AAA) batteries

Mechanical Folding Rangefinder



Item NO.	Size	📏	📦	RMB
CL710802	Mechanical big wheel	6	1.86	

- There is a mounted calculator in the solid anti-vibration roller, and the counter can calculate the forward and backward stroke
- The measuring wheel is driven by a precise toothed belt, and the counter is reset by a reset dial lever
- The wheels are made of new ABS engineering plastics and are covered with ultra-wear-resistant rubber leather with high strength
- Side brace foot, convenient parking stability, easy to use



A collection of various tools from the Changlu brand, including two spray guns (one with a green handle and one with a silver handle), a green level, a silver tape measure, a silver torch, and a green-handled tool. The tools are arranged on a dark, reflective surface. The text "DECORATING COMPREHENSIVE" is overlaid in white, bold, sans-serif font across the top half of the image. The Changlu logo is visible on several tools, including the spray guns and the level. The tape measure has "3m" and "Changlu" printed on it. The torch has "Changlu" printed on its handle. The level has "Changlu" and "BL-300" printed on it. The green-handled tool has "Changlu" printed on its handle. The spray gun with the green handle has "Changlu" and "608608" printed on its body. The spray gun with the silver handle has "Changlu" and "608608" printed on its body. The level has "Changlu" and "BL-300" printed on its handle. The tape measure has "3m" and "Changlu" printed on it. The torch has "Changlu" printed on its handle. The green-handled tool has "Changlu" printed on its handle. The text "DECORATING COMPREHENSIVE" is overlaid in white, bold, sans-serif font across the top half of the image. The background is a dark, reflective surface. The tools are arranged in a way that shows their different functions and designs. The overall aesthetic is professional and modern. The image is likely intended for a catalog or a website showcasing the company's product range. The text "DECORATING COMPREHENSIVE" suggests that the tools are used in a wide range of decorative applications. The Changlu logo is prominently displayed on the tools, reinforcing the brand identity. The image is well-lit, highlighting the details of the tools and their finishes. The dark background provides a strong contrast for the tools, making them stand out. The overall composition is balanced and visually appealing. The image effectively communicates the variety and quality of the tools offered by Changlu. The text "DECORATING COMPREHENSIVE" is a key message, indicating the versatility of the tools. The image is a high-quality representation of the company's products, suitable for marketing and promotional purposes. The tools shown are essential for many decorative tasks, and the image demonstrates the range of options available from Changlu. The professional presentation of the tools suggests a commitment to quality and reliability. The image is a clear and effective way to showcase the company's offerings to potential customers. The overall impression is one of a well-equipped and professional tool manufacturer. The image is a valuable asset for any company looking to promote its products in the decorative tool market. The tools shown are of high quality and are designed for durability and performance. The image is a testament to the company's commitment to excellence in tool manufacturing. The overall image is a strong and effective marketing tool for Changlu, showcasing its products in a clear and professional manner. The text "DECORATING COMPREHENSIVE" is a key message that is clearly visible and easy to read. The image is well-organized and visually appealing, making it an effective way to present the company's products. The tools shown are of various types and sizes, demonstrating the range of options available from Changlu. The image is a clear and effective way to showcase the company's offerings to potential customers. The overall impression is one of a well-equipped and professional tool manufacturer. The image is a valuable asset for any company looking to promote its products in the decorative tool market. The tools shown are of high quality and are designed for durability and performance. The image is a testament to the company's commitment to excellence in tool manufacturing. The overall image is a strong and effective marketing tool for Changlu, showcasing its products in a clear and professional manner.

DECORATING COMPREHENSIVE

—141—

Single Riveters



Item NO.	Size		RMB
CL608510	10.5"	10/40	

- riveting head is made of high carbon alloy steel with hardness HRC54-56
- With anti-slip plastic handle, with buckle protection at the end and plastic sprayed surface
- Pull stainless steel and aluminum rivets, one-hand operation, easy to use
- Suitable for riveting metal, leather, fiber and other materials


Industrial Grade Double Handle Riveters



Item NO.	Size		RMB
CL608701	12"	20	

- Black tip treatment, anti-slip handle jacket, gravity type labor-saving design
- 5 different specifications of rivets can be used, such as pullable aluminum, steel plate and stainless steel rivets
- Riveting for metal, automotive sheet metal, machinery, fiber, plastic and many other different

	2.4mm(3/32)	3.2mm(1/8)	4.0mm(5/32)	4.8mm(3/16)	5.4mm(1/4)
Aluminum	•	•	•	•	•
Steel	•	•	•	•	•
Stainless steel	•	•	•	•	•




L	L1	L2	D	B	H	W kg
297	37	113	28.00	142.00	44.00	0.750

Electrophoresis Double Handle Riveters



Item NO.	Size		RMB
CL608614	14"	1/20	

- Black tip processing, with magnetic anti-slip function, square pipe handle design
- With anti-slip handle, black and rust-proof treatment, pull stainless steel and aluminum rivets
- Suitable for riveting of metal, automotive sheet metal, leather, plastic, fiber and other materials




L	L1	L2	D	B	H	W kg
360	40	122	27.00	113.00	37.50	0.830

Advanced Double Handle Riveter



Item NO.	Size		RMB
CL608608	17"	1/20	

- riveting head is made of high carbon alloy steel with hardness HRC54-56
- With anti-slip handle, electroplated anti-rust handle, spring can spring out rivet
- Pull stainless steel and aluminum rivets, patented handle, comfortable to use
- Suitable for riveting of metal, automotive sheet metal, leather, plastic, fiber and other materials
- Equipped with 4 different specifications of replacement head, easy to use




L	L1	L2	D	B	H	W kg
420	40	138	21.50	120.00	39.00	0.920

Advanced Double Handle Riveter



Item NO.	Size		RMB
CL608717	17"	1/20	

- riveting head is made of high carbon alloy steel with hardness HRC54-56
- With anti-slip handle, internal rivet waste collection bucket, surface electrophoresis anti-rust
- Pull stainless steel and aluminum rivets
- Suitable for riveting of metal, automotive sheet metal, leather, fiber and other materials
- Patented handle, comfortable to use




L	L1	L2	D	B	H	W kg
426	38	138	22.00	112.00	41.00	0.920

M017 Rivet Nut Gun



Item NO.	Size	Configuration		RMB
CL608501	17"	7 nut gun heads	5	

- Rivet head is made of high-carbon alloy steel and hardened by high-frequency fired fire
- Push the pull rod to the head to rotate the fastening nut to the right and loosen the nut to the left
- Easy to disassemble and install nuts, with black surface and anti-rust treatment.
- Nuts with specifications ranging from M3 to M12 are available



L	L1	L2	D	B	H	W kg
435	63	124	32.20	167.00	48.60	3.360




M012 Rivet Nut Gun



Item NO.	Size	Configuration	Icon	RMB
CL608502	12"	5 nut gun heads		20

- Rivet head is made of high-carbon alloy steel and hardened by high-frequency fired fire
- Push the pull rod to the head to rotate the upper nut to the right, and loosen the nut to the left
- Easy to disassemble and install nuts, with black surface and anti-rust treatment.
- Nuts with specifications from M3 to M8 are available



L	L1	L2	D	B	H	W kg
300	57	111	28.10	124.00	32.10	0.955

Rivet Nut




Item NO.	Size	Icon	Icon	RMB
CL608511	M3			
CL608512	M4			
CL608513	M5			
CL608514	M6			
CL608515	M8			
CL608516	M10			
CL608517	M12			

M012 Rivet Nut Gun



Item NO.	Size	Icon	RMB
CL608703	11"		6

- Rivet components: sleeve + rivet pull rod (guide tip: 2.4/3.2/4.0/4.8/6.4)
- Rivet nut assembly: sleeve + rivet nut pull rod (gun head: M3/M4/M5/M6/M8/M10)
- Reaming assembly: curved edge/square edge
- Sleeve fixing nut
- Multi-purpose wrench



L	L1	L2	D	B	H	W kg
261	42	123	24.00	126.00	48.00	2.750

Conversion Connector For Electric Riveting Gun



Item NO.	Size	Icon	Icon	RMB
CL608702	170mm			0.51

- Forged by alloy steel, 3 claw pieces, hardened by heat treatment, strong and durable clamping
- Usage: Adjust the electric bit to the appropriate opening and insert the hexagon adapter into the drill collet
- Positive turn clamp the joint, put in the rivet to open the positive turn rivet to pull the rivet, reverse exit rivet
- Used for automobile or machinery, sheet metal, instrument, train body, aviation, home decoration and riveting of aluminum window, etc


Labor-saving Bearing Glue Gun



Item NO.	Size	Icon	RMB
CL800606	15"		24

- Adopting multi position bearing design, large stroke push, comfortable large handle, ergonomic design, quick and effortless gluing.

- The tail is equipped with an anti drip device, and the switch is pushed upwards to prevent glue leakage during construction.




L	L1	B	D Outside barrel diameter	L2 trip	d Inner diameter	W kg
630	377	208.00	67	330	51.65	0.935

Structural Glue Gun



Item NO.	Size	Icon	RMB
CL800603	9"		2/24
CL800604	15"		2/24

- Aluminum alloy gun body, pointed nozzle, equipped with replaceable rubber nozzle
- Suitable for 793 soft sealant, 995 structural adhesive, curtain wall adhesive, etc., easy to use




L	L1	B	D Outside barrel diameter	L2 trip	d Inner diameter	W kg
367	238	190.00	65.45	191	51.7	0.575
497	390	190.00	65.63	340	51.5	0.670

Glass Glue Gun



Item NO.	Size		RMB
CL800602	9"	6/36	

- Steel structure gun body, very strong, beautiful, feel good, force stop glue
- Beautiful and durable, labor-saving ideal glass glue extruding tool



L	L1	B	D	L2	d	W
356	244	210.00	56.1	229	51.8	0.595

Single-Claws Glass Sucker



Item NO.	Size			RMB
CL709801	Single-Claw	20	0.45	


- High strength aluminum alloy die casting disc body, durable, rubber pad
- It is made of natural rubber with precise formula, with strong suction and 50KG horizontal suction of single claw

Glass Glue Gun (Economical Type)



Item NO.	Size		RMB
CL800605	9"	40	

- Steel structure gun body, very strong, beautiful, feel good, force stop glue
- Beautiful and durable, labor-saving ideal glass glue extruding tool



L	L1	B	D	L2	d	W
383	249	208.00	56	231	52.2	0.535

Double-Claws Glass Sucker



Item NO.	Size			RMB
CL709802	Double-Claw	20	0.84	


- High strength aluminum alloy die casting disc body, durable, rubber pad
- It is made of natural rubber with precise formula, with strong suction force of 100KG for two PAWS

360-degree Rotation Oppression Glue Gun



Item NO.	Size		RMB
CL800601		2/24	

- The grip design can rotate 360° for accurate alignment even at crevices or entry angles
- Silica gel is injected by 4-point force, with dual thrust system (TT structure)
- At the end of one stroke, the push rod automatically retracts millimeters to release pressure on the silicone
- This prevents fluid from flowing out and makes the grip soft, secure and resistant to slipping
- Conveying board and propelling rod are processed by fired fire and are firm and durable



L	L1	B	D	L2	d	W
362	246	190.00	53.66	231	50.2	0.650

Three-Claws Glass Sucker



Item NO.	Size			RMB
CL709803	Three-Claws	10	1.11	

- High strength aluminum alloy die casting disc body, durable, rubber pad
- Made of natural rubber with precise formula, strong suction, three-claw suction 150KG





Three-Claws High Grade Glass Sucker



Item NO.	Size			RMB
CL709804	tee	10	2.46	

- High strength aluminum alloy die casting disc body, durable, rubber
- Handle, not easy to slip, rubber pad made of natural rubber through precise formula, strong suction,
- Three claw suction 225KG.

Scraper Cutter



Item NO.	Size			RMB
CL801106	102MM	12/144	0.13	
CL801101	blade	10/100	0.07	

- Adopt new ABS plastic handle, high quality high carbon steel blade, durable.
- Used for cleaning glass surface sundries, floors, floor tiles, wall paint removal, wallpaper and other uses

Glass Cutter



Item NO.	Size			RMB
CL800801		6/120	0.10	

- High cutting precision, high efficiency and long life
- Seiko production, durable, sharp edge, smooth cutting, not afraid of heavy mouth, easy to break

Steel pipe handle cleaning knife



Item NO.	Size			RMB
CL801112	300mm	6/54	0.28	
CL801124	600mm	6/60	0.39	
CL801136	900mm	6/48	0.49	

- Handle made of aluminum alloy and steel pipe, high quality high carbon steel blade, durable and practical
- Used for cleaning glass surface sundries, floors, floor tiles, wall paint removal, wallpaper and other uses

Glass Cutter



Item NO.	Size			RMB
CL800803		10/120		


- Glass knife wheel sharp cutting, longer knife wheel, large cutting range, thickened axis, long service life.
- The head is made of metal, which is used to break the glass by knocking the blocks or padding in the glass scratch after cutting the glass.
- Easy to use, comfortable to grip, no fatigue for a long time.

Putty Knife




Item NO.	Size		RMB
CL811000	1"	12/240	
CL811001	2"	12/240	
CL811002	2.5"	12/240	
CL811003	3"	12/240	
CL811004	4"	12/240	
CL811005	5"	8/160	

- 3Cr13 stainless steel forged with strong corrosion resistance, bremsstrahlung is good and not easy to break, and the surface is fine polished
- Double color injection molding design, TPR plastic wrap comfortable grip without falling edge, superior to plastic or wood handle



Size	L	L1	A	H	B	W
1"	203	88	25	0.63	34.11	0.060
2"	210	94	50	0.80	34.15	0.070
2.5"	208	92	65	0.75	34.22	0.075
3"	208	92	75	0.83	34.40	0.080
4"	215	100	100	0.70	34.10	0.085
5"	216	100	125	0.74	34.01	0.100

Drywall Moving Tool



Item NO.	Size			RMB
CL802501		6/24	0.59	

- Zinc aluminum die-casting, lightweight and durable, reinforced bottom plate design, increase the weight of construction board
- For plasterboard (can also be used for various decorative boards) to pad up to the appropriate position
- One person can easily move, install and fix the plate

Keel Clamp With Double Color Handle



Item NO.	Size			RMB
CL802311	13"	6/36	0.83	

- Punch is made of special alloy and handle is cast in high carbon steel
- Professional tools for light steel keel partition construction,
- Used for connecting and fixing between horizontal and vertical light steel keels with wall thickness of 0.6-0.8mm, construction

Plate Lifter



Item NO.	Size			RMB
CL802401		6/24	0.40	

- According to the ergonomic design of the plate lift, ABS engineering material, firm and not easy to deformation
- TPR handle is comfortable, two people can lift the board without fatigue

Magnetism Plumb Line



Item NO.	Size			RMB
CL801006	6mx400g	6/36	0.59	
CL801003	3mx300g	6/36	0.44	

- Lock function, strong magnetic, wire retracting freely, fast positioning
- Rubidium magnet with excellent magnetic energy is adopted to realize miniaturization, lightweight and magnetic capacity up to 2000 Gauss
- With automatic balance adjustment function. Wood with inserts, steel with magnets, concrete, etc., with hooks to fix
- Adopt yellow eye-catching silk thread, easy to measure, heavy hammer can stop quickly

American Heavy Duty Keel Pliers



Item NO.	Size			RMB
CL802301		6/24	0.97	

- Zinc aluminum die-casting, lightweight and durable, reinforced bottom plate design, increase the weight of construction board
- For plasterboard (can also be used for various decorative boards) to pad up to the appropriate position
- One person can easily move, install and fix the plate

Automatic Coil Ink Fountain



Item NO.	Size			RMB
CL801201	15M	6/48	0.17	

- Automatic recovery, light and convenient, small volume, light weight, prevent ink volatilization structure design
- Durable, uniform ink on ink line, bright ink line, prevent reverse ink line structure design



VDE
绝缘



Manual Nail Gun



Item NO.	Size			RMB
CL810801		6/24	0.06	

- Place the nail gun horizontally on the surface of the object to be hit, and place the left hand on the nail gun if necessary Hold down the upper screw for better stitching effect
- Used for wood, strong plastic, foam board, etc., small volume, easy to carry
- Tip: Do not point the nail gun at any person or work subject When the nail gun is not in use, the nail should be removed from the gun
- Scope of use



Multifunctional Angle Shears



Item NO.	Size			RMB
CL618001	9"	1/72	0.35	

- Suitable for cutting thickness of 1mm, width of 30mm or less paint-free sealing edge card, electrical wiring groove, etc
 - Adjustable from 45° to 135°, clear dial for easy adjustment and accurate operation
 - Hardened blade, sharp shearing, can replace SK-5 blade, widely applicable
- Note: Do not cut steel, aluminum and other metal materials

Plastic Handle Foam Gun



Item NO.	Size			RMB
CL700712		2/40		

- High carbon steel seamless tube, smooth glue
- Anti-slip glue release regulator design, precise control of the amount of glue
- Used for decoration, filling crevices and foaming
- Place the foam glue over the foaming gun to fix it

Automatic Hose Reel (Drums)



application	hose	pressure	temperature
Air	8mmX10m	8-12bar	-15°C—60°C

Item NO.	Size			RMB
CL705101	8mmx10m	4	4.27	

- Easy to install, can be hoisted, wall mounted, or installed on the spot beside the station screw arrangement design, Ensure smooth, complete and orderly shrinkage of products
- Arbitrary locking and automatic retracting function, easy operation, safe closed structure, Increased safety protection and sealing, prolong the hose life

Automatic Cord Rewind (Drum)



Application	Electricity	Electric current	Voltage	Rated power
Electricity	1.5mm X12m	10A	220V	2000w (Complete pull out)

Item NO.	Size			RMB
CL705102	1.5mmx12m	4	5.08	

- Equipped with safety overheating protection device, high toughness wire and high quality drop-resistant socket
- Unique arbitrary lock function, can arbitrarily choose the required working length Occupies less space, the appearance design is fashionable and beautiful

Steel Code



Item NO.	Size			RMB
CL800203	3mm	25/100	0.41	20.26
CL800204	4mm	25/100	0.62	23.05
CL800205	5mm	25/50	0.72	27.52
CL800206	6mm	25/50	1.04	37.42
CL800208	8mm	25/50	1.39	47.00

- Solid number steel seal 0-9
- Made of high quality vanadium steel tool steel, the font is sharp and clear
- Used for mold or metal material labeling and marking
- Matte surface treatment, strength of 600-800N/m square meters

12PCS Belt Impulse



Item NO.	Size			RMB
CL800312	12PCS	10/20	1.14	

- Made of high carbon steel, the whole punch is treated by high-frequency quenching and hardening
- With waterproof Oxford zipper bag, practical, convenient and durable
- Configuration: 3, 4, 5, 6, 8, 9, 10, 11, 12, 14, 16, 19mm

Steel Letter



Item NO.	Size			RMB
CL800103	3mm	10/30	0.16	
CL800104	4mm	10/30	0.21	
CL800105	5mm	10/20	0.25	
CL800106	6mm	10/20	0.35	
CL800108	8mm	5/10	0.46	

- Formal English letters stamped a-Z capital letters
- Made of high quality vanadium steel tool steel, the font is sharp and clear
- Used for mold or metal material labeling and marking
- Matte surface treatment, strength of 600-800N/m square meters

15PCS Belt Impulse



Item NO.	Size			RMB
CL800315	15PCS	5/10	2.04	

- Made of high carbon steel, the whole punch is treated by high-frequency quenching and hardening
- With waterproof Oxford zipper bag, practical, convenient and durable
- Configuration: 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 14, 16, 19,

Leather Punch



Item NO.	Size			RMB
CL800401	2.0-4.5mm	6/48	0.44	

- The whole is made of special steel for advanced tools, with rapid, accurate and precise drilling
- The handle is designed with advanced PVC wrapping glue, which is comfortable and more conducive to long-term use
- Unique labor-saving lever design, easy to operate
- Used for punching leather, belts, shoes and plastics

11pcs Hole Saw Set



Item NO.	Size			RMB
CL801602	11件套	20		

- Subtractive smooth, high precision opening, can be used in walls, wood, plastic and other soft materials.
- 8-piece hole saw 19mm=3/4" 25mm=1" 29mm=1-1/8"
 32 mm = 1-1/4" 38 mm = 1-1/2" 44 mm = 1-3/4"
 51 mm = 2" 64 mm = 2-1/2"
- Two central axis and one inner hexagon wrench



VDE
绝缘



3 Pcs Hole Saws Set



Item NO.	Size	🚚	📦	RMB
CL801601	3PCS	10/50	0.20	

Product features:

Subtractive smooth, high precision opening, can be used in walls, wood, plastic and other soft materials
 1 piece hole saw 54mm=2-1/8"
 1 piece flat drill for woodworking
 1 piece large center shaft


Dust Blowing Gun



Item NO.	Size	🚚	📦	RMB
CL801311	8X110mm	12/120		
CL801312	8X270mm	12/120		

- The gun body is made of POM material, which provides a comfortable grip and is sturdy and durable. The air outlet is made of 201 stainless steel material with an outer diameter of 8mm and a wall thickness of 0.5mm. The air outlet is finely processed and shrunk, and the nozzle spraying speed is high.
- The spring and O-ring are made of imported materials and have been effectively tested 800000 times.
- Suitable for cleaning and dust removal of various mechanical equipment.

Aluminum Hand Pump

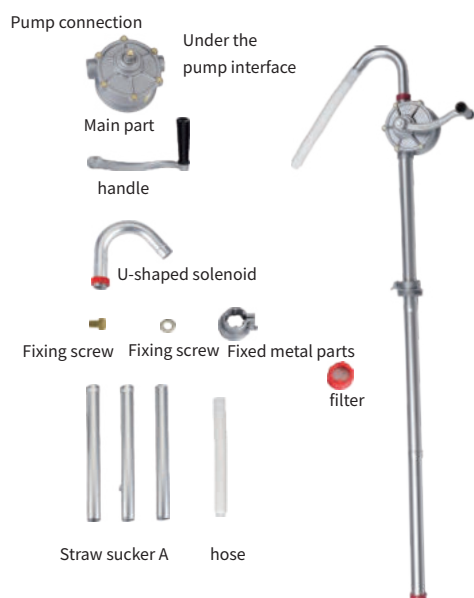

Technical Description:		Pumpable liquid	Lamp oil, light oil, heavy oil
model:	25MM	Extraction capacity	28
type:	Hand crank1.5m	Number of rotations	70/min
Pumping distance:	6m	Number of rotations:	1.3
Oil pressure distance:		length:	1.3

Item NO.	Size	🚚	📦	RMB
CL800901	Φ25mm	10	1.68	
CL800902	Φ32mm	10	2.17	

- The product is made of high-quality aluminum alloy with high precision and strong wear resistance, which can be widely used Gasoline, light oil, kerosene and cooking oil and other oil extraction transfer
- The product structure is exquisite and beautiful, removable, easy to use, carry and save

Dust Blowing Gun



Item NO.	Size	🚚	📦	RMB
CL801301	6mmx100mm	12/96	0.14	
CL801302	6mmx230mm	10/60	0.18	

- The joint is made of all copper to prevent sliding teeth and be durable
- The gun body adopts ergonomic design principle, with hook hole attached
- High quality PVC injection molding, comfortable feel
- Used to remove dust, powder, dust and moisture

Dust Blowing Gun



Item NO.	Size	🚚	📦	RMB
CL801303	5mmX80mm	25/100	0.20	

- Made of alloy material, strong and durable
- Comfortable feel, stable center of gravity.Strong blower, low consumption, energy saving slender tube nozzle spray High Speed, narrow airflow, can be shot into deep holes, blind holes, narrow cracks and other difficult to clean occasions
- The airflow is small, dispersed, smooth and easy to grasp;Suitable for any machine and equipment cleaning dust

Fast Precision Connector Series



Item NO.	Size	重量	长度	RMB
CL750901	20SM*1/4	0.04		
CL750902	30SM*3/8	0.04		
CL750903	40SM*1/2	0.05		
CL750911	20SF*1/4	0.04		
CL750912	30SF*3/8	0.05		
CL750913	40SF*1/2	0.05		
CL750921	20SP*5*8PU	0.05		
CL750922	30SP*6.5*10PU	0.05		
CL750923	40SP*8*12PU	0.05		
CL750931	20SH*5/16	0.06		
CL750932	30SH*3/8	0.06		
CL750933	40SH*1/2	0.06		
CL750941		0.01		

- PP plastic material, beautiful appearance, corrosion resistance
- Wear resistance of more than 100,000 times
- Cold resistance, can be used in the environment of minus 30 degrees
- Oil and corrosion resistance, rolling, air leakage, safe and reliable, one-hand, easy to operate

Fast Precision Connector Series



Item NO.	Size	重量	长度	RMB
CL750102	2分	0.22		
CL750103	3分	0.21		
CL750104	4分	0.22		
CL750202	2分	0.25		
CL750203	3分	0.23		
CL750303	20长	0.10		
CL750304	30长	0.21		
CL750402	5X8	0.11		
CL750403	6.5X10	0.12		
CL750404	8X12	0.13		
CL750502	2分	0.03		
CL750503	3分	0.03		
CL750504	4分	0.03		
CL750602	2分	0.03		
CL750703	20	0.03		
CL750704	30	0.03		
CL750802	5X8	0.04		
CL750803	6.5X10	0.04		
CL750804	8X12	0.05		

- Use of special steel, overall pressing molding, beautiful appearance, corrosion resistance
- With one-way valve, when the joint is disconnected, it can effectively prevent the working medium from coming out
- The flow can also prevent harmful substances from entering the pipeline
- The structure adopts the eccentric principle to implement the braking lock, which is safe, reliable and easy to operate

Fast Precision Connector Series



Item NO.	Size	重量	长度	RMB
CL750001	tee	50	0.29	

- Use of special steel, overall pressing molding, beautiful appearance, corrosion resistance with check valve
- When the joint is disconnected, it can effectively prevent the outflow of working medium and prevent harmful substances The mass goes into the pipe
- The structure adopts the eccentric principle to implement the braking lock, which is safe, reliable and easy to operate

Fast Precision Connector Series



Item NO.	Size	重量	长度	RMB
CL750002	too	50	0.22	

- Use of special steel, overall pressing molding, beautiful appearance, corrosion resistance with check valve
- When the joint is disconnected, it can effectively prevent the outflow of working medium and prevent harmful substances The mass goes into the pipe
- The structure adopts the eccentric principle to implement the braking lock, which is safe, reliable and easy to operate



Full Cowhide Protective Gloves



Item NO.	Size			RMB
CL801702	11"	12/60	0.18	

- Made of first-class cowhide, fine workmanship, comfortable and durable
- Anti-cut, anti-oil, anti-wear, suitable for building decoration and other industries

Half Leather Riveter's Gloves



Item NO.	Size			RMB
CL801711	10.5"	12/120		

- Features: wear resistance, slip resistance, high temperature resistance, puncture resistance, sweat absorption, breathable. It can still keep hand lubrication under low temperature condition.
- Application: suitable for various industries, is the best choice for handling and assembly.

All Cowhide Long Welding Gloves (One Layer Of All Leather)



Item NO.	Size			RMB
CL801703	15"	12/72		

- Made of first-class cowhide, fine workmanship, comfortable and durable
- Anti-cut, anti-oil, anti-wear, suitable for welder cutting and welding operations
- Class I Protection

Oxygen Welding Gloves



Item NO.	Size			RMB
CL801712	10"	12/144		

- Features: wear resistance, slip resistance, high temperature resistance, puncture resistance, sweat absorption, breathable. It can still keep hand lubrication under low temperature condition.
- Application: suitable for argon arc welding, oxygen welding and other precision welding, industrial assembly with oil pollution and car maintenance.

Double Layer Overhead Welding Gloves



Item NO.	Size			RMB
CL801714	14"	12/72		

- Comply with EN 420 standard manufacturing requirements
- Features: the whole inner layer is designed to enhance the heat insulation effect and comfort. Double glove leather design, The gloves are more resistant to high temperature, wear resistance and durability, and have puncture proof, sweat absorption, air permeability and other characteristics.
- It can still keep hand lubrication under low temperature condition.
- Application: suitable for high temperature welding, such as electric welding, oxidation day welding.

Single Layer Flat Welding Gloves



Item NO.	Size			RMB
CL801713	14"	12/72		

- Features: wear resistance, slip resistance, high temperature resistance, puncture resistance, sweat absorption, breathable.
- It can still keep hand lubrication under low temperature condition.
- Application: suitable for flat welding.

Dual Turn Welding Goggles



Item NO.	Size			RMB
CL801811	Double flip	10/200	0.12	

- Flexible PVC lens body, transparent PVC inner lens and colored PVC outer lens
- Clamshell design, open and close double lock positioning, easy to use
- It is suitable for the protection of gas welding, brazing and gas cutting

Plain Glass



Item NO.	Size			RMB
CL801814	Flat light	16/480	0.04	

- Fashion style welder sunglasses, radian lens design, more fashion sense
- Breathable grille design on both sides makes it more humanized

Welding Glasses



Item NO.	Size			RMB
CL801813	dark green	16/480	0.04	

- Fashion style welder sunglasses, radian lens design, more fashion sense
- Breathable grille design on both sides makes it more humanized

Welding Glasses



Item NO.	Size			RMB
CL801812	grey	16/480	0.04	

- Fashion style welder sunglasses, radian lens design, more fashion sense
- Breathable grille design on both sides makes it more humanized

Friction Particles Industrial Oil Hand Sanitizer



BEFORE



after

Item NO.	Size			RMB
CL830001	2000ML	10		

- This product is specialized in cleaning heavy hand oil stains: oil, diesel oil, butter, hydraulic oil, lubricating oil, Anti-rust oil and other stubborn oil.
- Main ingredients: fatty alcohol polyoxyethylene ether, (AEO-9) glycerol (glycerol), Environmental protection decontaminate friction particles, additives, ionic water, essence, Kason preservative



Spray Gun



Item NO.	Size	Weight (kg)	Volume (L)	RMB
CL800701	PQ-2	10	0.89	

- Nozzle diameter: 1.5mm.
- Suitable for medium and low viscosity coating media (19--23s), such as automobiles, furniture, Home appliances and other finishing paint spraying
- It has convenient and reasonable functions of air intake, spraying width, coating adjustment, etc., stainless iron nozzle and coating needle
- Different feeding methods (suction type, gravity type, pressure type), nozzle of different caliber, And different hole number of atomizing cap design, better meet the requirements of spraying under a variety of conditions

Spray Gun



Item NO.	Size	Weight (kg)	Volume (L)	RMB
CL800702	F-75	20	0.70	

- Nozzle diameter: 1.5mm
- Suitable for medium and low viscosity coating media (19--23s), such as automobile, furniture, household appliances, etc The paint spraying
- It has convenient and reasonable functions of air intake, spraying width, coating adjustment, etc., stainless iron nozzle and coating needle
- Different feeding methods (suction type, gravity type, pressure type), nozzle of different caliber, And different hole number of atomizing cap design, better meet the requirements of spraying under a variety of conditions

Spray Gun



Item NO.	Size	Weight (kg)	Volume (L)	RMB
CL800704	K-3	20	0.34	

- Nozzle diameter: 0.5mm
- Spray gun is manufactured with high strength and precision structure
- Tighten the lid of the tank, connect the gas pipe, and press the trigger to enter the working air pressure
- Simple structure, small volume, light weight, uniform paint, beautiful shape, easy to use
- Suitable for vehicle, aircraft, ship, furniture, instrument, mechanical equipment and other purposes of painting

Spray Gun



Item NO.	Size	Weight (kg)	Volume (L)	RMB
CL800703	W-71	20	0.62	

- Nozzle diameter: 1.5mm.
- Suitable for medium and low viscosity coating media (19--23s), such as automobiles, furniture, Home appliances and other finishing paint spraying
- With convenient and reasonable air intake, spray width, paint regulation and other functions of stainless iron nozzle, paint needle
- Different feeding methods (suction type, gravity type, pressure delivery type), different caliber nozzle, And different hole number of atomizing cap design, better meet the requirements of spraying under a variety of conditions



ELECTRONIC TOOLS



Wire Stripper



Item NO.	Size	Long	Wide	High	Width of opening	Weight	Volume	RMB
CL609507	7"	177	55	12.38	40.23	10/120	0.14	

- High quality cold rolled steel plate manufacturing, high frequency heat treatment of edge
- Jaw hardness reaches HRC45°
- Easy to peel 0.5~2.5mm copper wire from the insulation skin without damaging the inner wire
- The calibration is clear and easy to operate, and the line can be arranged and bent
- Handle with spring, one hand can unscrew the lock, more convenient operation

Stainless Steel Multifunctional Wire Stripper



Item NO.	Size	Long	Wide	High	Width of opening	Weight	Volume	RMB
CL609501	7.5"	186	57	17.21	48.57	10/120	0.18	50.00

- The clamp body is made of high-quality stainless steel, which is not easy to rust, has good toughness, high hardness, and sharp cutting
- Equipped with functions such as wire stripping, cutting, clamping, branching, pressing, and winding, the wire stripping cut is neat and not easy to damage the wire core.
- The wire stripping edge is suitable for 0.8-2.8mm multi-core soft wires.
- Stripping range: 0.8 1.0 1.3 1.6 2.0 2.4 2.8mm

Bending Handle Stripping Pliers



Item NO.	Size	Long	Wide	High	Width of opening	Weight	Volume	RMB
CL609509	7.5"	184	65.25	13	24.37	12/72	0.18	

- High quality cold rolled steel plate manufacturing, high frequency heat treatment of edge
- Jaw hardness reaches HRC45°
- It can easily peel 0.8~2.6mm copper wire from the insulation skin without damaging the inner wire
- The calibration is clear and easy to operate, and the line can be arranged and bent
- Handle with spring, one hand can unscrew the lock, more convenient operation

Multifunctional Wire Stripper



Item NO.	Size	Long	Wide	High	Width of opening	Weight	Volume	RMB
CL609505	7"	181	61.17	13.50	34.10	10/120	0.16	

- This product is made of 65 manganese steel with integral heat treatment.
- New environmental protection PP+TPR non-slip handle, comfortable to use.
- It has the functions of high-precision grinding mouth, multi-hole stripping, shearing and crimping.

Wire Crimping And Stripping Pliers



Item NO.	Size	Long	Wide	High	Width of opening	Weight	Volume	RMB
CL609485	8.5"	213	66.15	15.40	28.14	12/72	0.23	

- Made of high quality cold rolled steel plate, the head is blackened and rust-proof, with 3 pressing positions
- Used for cable cutting, peeling, and terminal crimping 2.6~M4
- Warning: Handle does not resist electricity

High Precision Wire Stripping Pliers



Item NO.	Size	Long	Wide	High	Width of opening	Weight	Volume	RMB
CL609506	6"	161	54.00	11.50	29.62	20/120	0.15	

- Made of high-quality cold-rolled steel plate, the edge is subject to high frequency heat treatment.
- The insulation skin can be easily stripped of 0.6~2.6mm copper wire without damaging the inner wire.
- The scale is clear and easy to operate, and can manage and bend lines.
- The handle is equipped with a spring, and the lock can be unscrewed with one hand, making the operation more convenient.

Heavy Duty Automatic Wire Strippers



Item NO.	Size	Long	Wide	High			RMB
CL609408	8"	205	108.79	32.13	6/36	0.38	

- Strip, cut and press wire in one
- Stripping range: 0.2-6mm², 24-10AWG
- Wire stripper blade material is Cr12, heat treatment
- With wire stripping force adjustment nut, in case of slip and wire breaking
- Please fine-tune the copper nut and press the insulated and non-insulated terminals

Multifuntion Stripping Pliers



Item NO.	Size	Long	Wide	High	Width of opening			RMB
CL609407	7"	181	59.25	19.87	34.10	10/60	0.22	

- High quality cold rolled steel plate manufacturing, high frequency heat treatment of edge
- Cutting and stripping in one, convenient for coaxial cable cutting and internal wire cutting
- wire stripping capacity 14, 12, 10, 8AWG
- Can cut 10mm² round cable, not suitable for cutting steel wire
- Two-color TPR non-slip handle, comfortable to use

High-grade Automatic Wire Stripper



Item NO.	Size	Long	Wide	High	Width of opening			RMB
CL605307	7"	175	75.32	30.03	25.50	6/48	0.30	

- Wire stripper and cutter functions in one.
- Adaptive mechanical structure according to wire size, providing strong wire
- Film stripping function without damaging the wire
- Applicable wire range is 1mm-3.2mm
- The dial can be easily adjusted according to the thickness of the insulated wire, and the pressure of the knife edge can be adjusted

Multifuntion Wire Stripper



Item NO.	Size	Long	Wide	High	Width of opening			RMB
CL616608	8"	204	55.21	17.83	36.50	10/60	0.27	

- This product is made of 65Mn material and cold forged as a whole
- With peeling, wire stripping, wire pressing, shearing and other functions.
- Range of pressing line: 5.5-2.5mm² 1.5-1mm² 0.5-0.25mm²
- Range of stripping line: 8.5mm² 5.5mm² 4.0mm² 2.5mm² 1.5mm²

Duckbill Type Multi-purpose Wire Strippers



Item NO.	Size	Long	Wide	High			RMB
CL609607	7"	170	730.5	22.54	10/50	0.21	

- Suitable for multi-ply wire with rubber insulation and fine full-line wire
- It can be adjusted automatically according to different cross sections of wires to prevent damage to wires.
- Wire stripping capacity: 0.08~4.0mm², no need to adjust the aperture, automatic wire stripping
- Suitable for stripping all rows of wire, the pressure can be adjusted to avoid hurting the wire core during stripping

Cold Crimping Pliers



Item NO.	Size			RMB
CL610001	1/2/5mm ²	6/36	0.54	

- Suitable for inserting spring and connecting end
- High-precision terminal crimping hole, crimping tightly with the terminal does not damage the terminal
- The clamp body is made of high-end steel plate, with high strength and long service life, which is not easy to distort and bend
- Ratchet crimping mode, equipped with clip spring self-locking device, flexible opening and closing
- Pressure adjusting knob design, suitable for a variety of terminals
- Ergonomic handle design, labor-saving, durable and comfortable grip



Ratchet Crimping Plier



103 AWG:22-10AWG
Leagth:230mm
Capacity:0.5-6.0mm



Item NO.	Size	Long	Wide	High			RMB
CL610011	CL-103 (9")	225	68.00	22.00	10/40	0.55	

- Comply with DIN 46228 standard manufacturing requirements
- Ratchet clamp components are made of special steel;
- Ergonomic structure design, section crimping, 50% labor saving;
- Sophisticated line pressing module and integral locking (automatic release mechanism) design
- Ensure that high quality line pressing standards can be maintained during repeated pressing;It has been carefully adjusted before leaving the factory

Ratchet Crimping Plier



CL-04WF Capacity:1.0-5
AWG:17-10AWG
Leagth:230mm



Item NO.	Size	Long	Wide	High			RMB
CL610014	CL-04WF (9")	226	70.00	22.00	10/40	0.56	

- Comply with DIN 46228 standard manufacturing requirements
- Ratchet clamp components are made of special steel;
- Ergonomic structure design, section crimping, 50% labor saving;
- Sophisticated line pressing module and integral locking (automatic release mechanism) design
- Ensure that high quality line pressing standards can be maintained during repeated pressing;It has been carefully adjusted before leaving the factory

Ratchet Crimping Plier



CL-101 Capacity:1.5-10mm²
AWG:17-7.0AWG
Leagth:230mm



Item NO.	Size	Long	Wide	High			RMB
CL610012	CL-101 (9")	225	74.00	22.00	10/40	0.55	

- Comply with DIN 46228 standard manufacturing requirements
- Ratchet clamp components are made of special steel;
- Ergonomic structure design, section crimping, 50% labor saving;
- Sophisticated line pressing module and integral locking (automatic release mechanism) design
- Ensure that high quality line pressing standards can be maintained during repeated pressing;It has been carefully adjusted before leaving the factory

Ratchet Crimping Plier



CL-06WF2C Capacity:0.5-2.5mm²
AWG:20-13AWG
Leagth:230mm



Item NO.	Size	Long	Wide	High			RMB
CL610015	CL-06WF2C (9")	238	74.00	22.00	10/40	0.58	

- Comply with DIN 46228 standard manufacturing requirements
- Ratchet clamp components are made of special steel;
- Ergonomic structure design, section crimping, 50% labor saving;
- Sophisticated line pressing module and integral locking (automatic release mechanism) design
- Ensure that high quality line pressing standards can be maintained during repeated pressing;It has been carefully adjusted before leaving the factory

Ratchet Crimping Plier



CL-03C Capacity:0.5-6.0mm²
AWG:20-10AWG
Leagth:230mm



Item NO.	Size	Long	Wide	High			RMB
CL610013	CL-03C (9")	228	72.00	22.00	10/40	0.55	

- Comply with DIN 46228 standard manufacturing requirements
- Ratchet clamp components are made of special steel;
- Ergonomic structure design, section crimping, 50% labor saving;
- Sophisticated line pressing module and integral locking (automatic release mechanism) design
- Ensure that high quality line pressing standards can be maintained during repeated pressing;It has been carefully adjusted before leaving the factory

Ratchet Crimping Plier



CL-16 Capacity:1.25-16mm²
AWG:16-5.0AWG
Leagth:270mm



Item NO.	Size	Long	Wide	High			RMB
CL610016	CL-16 (9")	273	100.00	23.50	10/40	0.49	

- Comply with DIN 46228 standard manufacturing requirements
- Ratchet clamp components are made of special steel;
- Ergonomic structure design, section crimping, 50% labor saving;
- Sophisticated line pressing module and integral locking (automatic release mechanism) design
- Ensure that high quality line pressing standards can be maintained during repeated pressing;It has been carefully adjusted before leaving the factory

Socket Type Special Crimping Plier



CL-6-4

Capacity:0.25-6.0mm
AWG:23-10AWG
Length:175mm



Item NO.	Size	Long	Wide	High			RMB
CL610021	CL6-4 (7")	172	78.00	17.00	10/40	0.39	

- Comply with DIN 46228 standard manufacturing requirements
- Created by super-grade chromium-vanadium steel and treated by oil fired stiff, the head is black and rust resistant.
- Optimized crimping with precision moulded profile and releasable ratchet,
- Suitable for tubular bare terminal and tubular pre-insulated terminal, as long as the terminal side into the crimping clamp, according to the required squeeze force of the terminal reached, the forced brake device will make the crimping clamp automatically released, to ensure that the high quality of the crimping standard can be maintained during repeated crimping

Electric Knife(Straight Edge)



Item NO.	Size			RMB
CL614212	Straight	12/72	0.13	

- Made of special manganese steel, with a blade hardness of HRC56~60 °
- Imitation rosewood handle design, sturdy and wear-resistant

Socket Type Special Crimping Plier

Capacity:0.25-6.0mm
AWG:23-10AWG
Length:175mm
For casing end



Item NO.	Size	Long	Wide	High			RMB
CL610022	CL6-6 (7")	172	80.00	17.00	10/40	0.40	

- Made of alloy high carbon steel and created by high frequency fired stiff HRC35~42°
- Unique hexagonal socket clamp head compression design, precision terminal crimping hole does not damage the wire,
- PVC anti-slip sheath design, thickened and comfortable for users to hold
- For non-welded and standard electrical connections, suitable for tubular bare terminals and tubular pre-insulated terminals

Electric Knife(Bend Edge)



Item NO.	Size			RMB
CL614211	Curved	12/72	0.13	

- Made of special manganese steel, with a blade hardness of HRC56~60 °
- Imitation rosewood handle design, sturdy and wear-resistant

Soldering Iron



Item NO.	Size	Long	Wide	High			RMB
CL609201	8P8C 6P6C 4P4C	195	64.00	17.76	10/50	0.39	

- Made of super grade chromium-vanadium steel, after oil quenching and hardening, the parallel crimping is very accurate.
- Smooth releasing ratchet ensures crimping quality, and labor-saving rod rod design reduces operating fatigue.
- Crimping range: RJ 10(4 cores)7.65mm RJ 11/12 (6 cores) 9.65mm;RJ 45 (8-core)11.68mm, three-use network pliers, can make 8-core network cable, 6-core, 4-core
- Application: it can cut and strip unshielded flat telephone lines and crimp butt parts

Curved Blade Cable Stripper Knife



Item NO.	Size			RMB
CL614221	Curved blade	12/72	0.08	

- The blade is made of alloy steel and has undergone oil quenching and hardening treatment, making it sharp and durable
- The back of the knife is covered with an insulated plastic sheath, which is comfortable to grip and comes with a protective knife cover



Internally Heated Type Thermostat Electric Soldering Iron



Item NO.	Size		RMB
CL611043	60W	20/80	

- Adopting PTC ceramic heating core, a new electronic temperature control circuit board, with fast heat recovery and high work efficiency
- Equipped with room temperature compensation function (room temperature -45°C), it can reach the required temperature in 30 seconds
- Adopting a long-lasting and environmentally friendly soldering iron tip, stainless steel seamless steel pipe, and environmentally friendly handle
- The temperature adjustment button can adjust the temperature as needed, with a temperature adjustment range of 200-450°C




L	L1	L2	L3	d1	d	B1	B	W	Wire length
205	18	53	134	1.20	8.08		22.60	0.150	1460

Internally Heated Type Thermostat Electric Soldering Iron



Item NO.	Size		RMB
CL611044	80W	8/80	

- Adjustable temperature electric soldering iron adopts new electronic temperature control circuit board, with rapid reheating and high working efficiency
- Equipped with room temperature compensation function (room temperature -45°C), can reach the required temperature in 1 minute
- Adopt long life environmental friendly soldering iron tip, stainless steel seamless steel pipe, PC handle
- Temperature adjustment button can adjust the temperature according to the need, temperature adjustment range: 200-450°C




L	L1	L2	L3	d1	d	B1	B	W	Wire length
236	18	71	145	1.25	9.10		27.90	0.175	1465

Externally Heated Type Thermostat Electric Soldering Iron



Item NO.	Size		RMB
CL611033	60W	8/96	

- Adjustable temperature electric soldering iron adopts new electronic temperature control circuit board, with rapid reheating and high working efficiency
- Equipped with room temperature compensation function (room temperature -450°C), 3-5 minutes to reach the required temperature
- Long life environmental friendly soldering iron tip, stainless steel seamless steel pipe, transparent environmental friendly handle
- Temperature adjustment button can adjust the temperature according to the need, temperature adjustment range: 200-450°C




L	L1	L2	L3	d1	d	B1	B	W	Wire length
244	23	77	144	1.30	4.60		26.00	0.150	1475

Externally Heated Type Soldering Iron



Item NO.	Size		RMB
CL611004	80W	8/48	
CL611005	100W	8/48	
CL611006	150W	8/48	
CL611007	200W	6/24	
CL611008	300W	6/24	

- High quality imported heating core
- The handle adopts the latest PBT plastic material, with high temperature resistance, fast heat dissipation and no hot hand
- Advantages of fast heat transfer, rapid heat recovery and high efficiency
- The replacement of heating core device is simple, convenient and quick, saving time and effort




Size	L	L1	L2	L3	d1	d	B1	B	W	Wire length
80W	256	30	98	128		6.80	9.56	28.00	0.260	1380
100W	268	30	109	128		8.00	11.25	28.50	0.285	1395
150W	280	34	115	128		9.00	14.15	28.40	0.320	1395
200W	303	43	129	131		15.00	20.85	30.70	0.480	1400
300W	335	51	152	130		18.00	33.39	30.40	0.655	1385

Externally Heated Type Soldering Iron



Item NO.	Size		RMB
CL611001	30W	8/96	
CL611002	40W	8/96	
CL611003	60W	8/96	

- Easy to replace heating core device, more convenient to use
- High quality double coil heater design to prevent local temperature increase
- Natural mica heating core, rapid heat transfer, high efficiency
- The handle adopts the latest PBT plastic material, with high temperature resistance, fast heat dissipation and no hot hand




Size	L	L1	L2	L3	d1	d	B1	B	W	Wire length
30W	208	22	76	108	0.70	3.60		26.00	0.130	1425
40W	215	22	83	107	1.00	4.60		26.00	0.135	1425
60W	219	23	86	117	1.30	5.70		26.00	0.140	1425

Externally Heated Type Soldering Iron



Item NO.	Size		RMB
CL611021	30W	8/96	
CL611022	40W	8/96	
CL611023	60W	8/96	
CL611024	80W	8/48	
CL611025	100W	8/48	
CL611026	150W	8/48	

- High quality imported heating core
- The handle adopts the latest PBT plastic material, with high temperature resistance, fast heat dissipation and no hot hand
- Advantages of fast heat transfer, rapid heat recovery and high efficiency
- The replacement of heating core device is simple, convenient and quick, saving time and effort




Size	L	L1	L2	L3	d1	d	B1	B	W	Wire length
30W	207	24	69	113	0.80	3.60		23.00	0.120	1420
40W	213	21	76	113	0.80	4.50		23.00	0.120	1410
60W	220	21	84	112	1.00	5.70		23.00	0.130	1410
80W	229	23	83	122	1.20	5.80		26.00	0.155	1400
100W	256	30	103	121		7.00	11.74	26.00	0.190	1415
150W	264	28	111	123		8.00	15.43	26.00	0.220	1410

Externally Heated Type Electric Soldering Iron With Lamp




Item NO.	Size		RMB
CL611011	30W	8/96	
CL611012	40W	8/96	
CL611013	50W	8/96	
CL611014	60W	8/96	

- High quality imported heating core, black soldering head
- The handle adopts the latest PBT plastic material, with high temperature resistance, fast heat dissipation and no hot hand
- Advantages of fast heat transfer, rapid heat recovery and high efficiency
- The replacement of heating core device is simple, convenient and quick, saving time and effort



Size	L	L1	L2	L3	d1	d	B1	B	W	Wire length
30W	247	22	72	153	0.80	3.65		28.20	0.130	1380
40W	254	22	78	152	1.00	4.60		28.20	0.145	1470
50W	265	26	84	153	1.00	5.70		28.30	0.150	1375
60W	265	25	84	151	1.00	5.65		28.24	0.150	1375

Soldering Iron



Item NO.	Size			RMB
CL612501	30W	2/200	0.01	
CL612502	40W	2/200	0.01	
CL612503	60W	2/200	0.01	
CL612504	80W	2/100	0.02	
CL612505	100W	2/100	0.03	
CL612506	150W	1/100	0.05	
CL612507	200W	1/50	0.07	
CL612508	300W	1/50	0.07	

- Made of imported nickel chromium wire, high quality natural mica sheet
- Double coil design, longer life

Solder Wire



Item NO.	Size			RMB
CL612451	0.8		0.30	
CL612452	1.0		0.30	
CL612453	1.2		0.30	
CL612454	1.6		0.30	

- High purity tin-lead alloy
- No spatter, little smoke and less residue during soldering operation
- Used for electronic, electrical, assembly and welding of copper, brass, silver, nickel, tin, cadmium, etc

Solder bar(0.5KG)



Item NO.	Tin content			RMB
CL612401	33%		0.50	
CL612402	45%		0.50	
CL612403	50%		0.50	
CL612404	63%		0.50	

- High purity, less tin residue and bright welding spot.
- Excellent wettability and weldability, high production efficiency
- Suitable for various soldering operations
- The appearance is clean, bright and free from contaminants



Solder Sucker



Item NO.	Size			RMB
CL611201		100/200	0.09	

- High quality PTFE nozzle, high temperature resistance, excellent solvent resistance
- Strong suction, fast and effective removal of residual solder

Intelligent Temperature Control Digital Display Hot Air Gun



Item NO.	Size			RMB
CL800503	2000W	1/12	0.76	

- Application: used for heat shrinkage, paint removal, thawing, preheating disinfection, workshop welding Glue welding, sewing carpet, tin melting, heating liquid, cleaning experimental equipment The instrument is a practical tool for moisture-proof, drying and heating

Thermoregulation Of Hot Air Gun



Item NO.	Size			RMB
CL800502	2000W	1/12	0.87	

- Double insulation protection, more safety
- Special overheating protection device to ensure the normal operation of the original heating device
- All products are tested by actual operation before leaving the factory
- This product is mainly used for automobile film, heat shrinkable tube shrinkage, ceramic tile replacement, aging paint removal, oil removal, PVC pipe bending, pipe thawing, screw loosening, mold and electronic maintenance and other operating appliances that need to be heated within the range of 600 degrees

Split Type Thermostatic Plastic Welding Torch



Item NO.	Size			RMB
CL611402	1080W	1/8	1.59	

- Professional welding all kinds of switch plastic plate, applicable to the cross-sectional area is not more than 6m square meters of plastic electrode


Temperature Of Plastic Welding



Item NO.	Size			RMB
CL611401	700W	1/20	0.76	

- Application: used for heat shrinkage, paint removal, thawing, preheating disinfection, workshop welding glue welding, seam carpet, tin melting, heating liquid, cleaning experimental instruments moistureproof, drying and heating instruments is a practical tool

Heating Core



Item NO.	Size	RMB
CL611402-1	CL611402 1080W	
CL800502-1	CL800502 2000W	

Anti-static stainless steel elongated pointed straight tweezers



Item NO.	Size			RMB
CL810702	Slender pointed straight head	20	0.02	

- Acid-resistant, non-magnetic chrome-nickel stainless steel, the clamping block is frosted, and the clamping force is large
- Black anti-static coating, surface resistant to insulation resistance, soft tip non-reflective
- Application: for fine work in electrostatic protection (EPA) field

Antistatic stainless steel elbow tweezers



Item NO.	Size			RMB
CL810706	Elbow	20	0.02	

- Acid-resistant, non-magnetic chrome-nickel stainless steel, the clamping block is frosted, and the clamping force is large
- Black anti-static coating, surface resistant to insulation resistance, soft tip non-reflective
- Application: for fine work in electrostatic protection (EPA) field

Anti-static stainless steel straight pointed tweezers



Item NO.	Size			RMB
CL810703	Straight point	20	0.02	

- Acid-resistant, non-magnetic chrome-nickel stainless steel, the clamping block is frosted, and the clamping force is large
- Black anti-static coating, surface resistant to insulation resistance, soft tip non-reflective
- Application: for fine work in electrostatic protection (EPA) field

Anti-static stainless steel round head tweezers



Item NO.	Size			RMB
CL810704	Round head	20	0.02	

- Acid-resistant, non-magnetic chrome-nickel stainless steel, the clamping block is frosted, and the clamping force is large
- Black anti-static coating, surface resistant to insulation resistance, soft tip non-reflective
- Application: for fine work in electrostatic protection (EPA) field

Anti-static stainless steel straight tweezers



Item NO.	Size			RMB
CL810701	Straight head	20	0.02	

- Acid-resistant, non-magnetic chrome-nickel stainless steel, the clamping block is frosted, and the clamping force is large
- Black anti-static coating, surface resistant to insulation resistance, soft tip non-reflective
- Application: for fine work in electrostatic protection (EPA) field

Anti-static stainless steel needle tip tweezers



Item NO.	Size			RMB
CL810705	Needle tip	20	0.02	

- Acid-resistant, non-magnetic chrome-nickel stainless steel, the clamping block is frosted, and the clamping force is large
- Black anti-static coating, surface resistant to insulation resistance, soft tip non-reflective
- Application: for fine work in electrostatic protection (EPA) field



VDE
绝缘

Mine Test Pencil



Item NO.	Size	Weight	Volume	RMB
CL501504	150-1500V	12/240	0.02	

- Tested and approved to DIN 57680/6 VDE 0680/6
- Measuring range $\leq 1000V$, with metal pen holder at plastic handle for easy carrying
- Material: high quality tool steel shank, full hard heat treatment, durable

Multifunctional Colored Led Test Pencil



Item NO.	Size	Weight	Volume	RMB
CL501407	70-250V	24/480		

- Induction measurement, direct measurement, and breakpoint detection; Second level tube luminous design, high brightness;
- The pen holder is made of highly transparent PC material, which has good durability; Compact structural design, exquisite and compact,
- Equipped with a pen clip design, convenient to carry;
- Direct test AC/DC70-250V induction test within 600V.

Digital Test Pencil



Item NO.	Size	Weight	Volume	RMB
CL501401	12V-220V	30/480	0.03	

- Measurement range direct AC test: 12V to 250V
- Material: high quality tool steel shank, hardened heat treatment, durable
- Dual display: LCD and neon lamp, LCD shows ac voltage

145MM Common Test Pencil



Item NO.	Size	Weight	Volume	RMB
CL501405	3X145mm	24/480	0.02	

- Material: high quality tool steel shank, fully hardened heat treatment, durable
- Metal pen holder at plastic handle for easy carrying
- Measurement range: $\leq 500V$ The product conforms to CE standard Do not use it as an ordinary screwdriver

With illumination induction digital display Test Pencil



Item NO.	Size	Weight	Volume	RMB
CL501404	12V-250V	12/120		

- The pen rod is made of high quality chromium-vanadium steel, and the pen tip is embossing technology to prevent slipping in the process of screw twisting
- Long life neon lamp: on/off more than 30000 times
- Induction test Can easily carry out induction breakpoint test, breaking point test
- Detect microwave radiation and leakage
- Special lighting function makes it more convenient to use at night. The LED display reads the value clearly

Non Contact Test Pencil



Item NO.	Size	Weight	Volume	RMB
CL501406	90V-1000V	12/120	0.06	

- Comply with CE safety codes and standards
- This product is safe to use and can measure ac voltage 90-1000V
- Light shape, pen holder design, double insulation protection, easy to carry
- Test induction lamp and buzzer prompt sound to quickly respond to charged environment
- Used to locate cable damage, test botry balance, phase sequence test in three-phase system

Intelligent Non-contact Test Pencil



Item NO.	Size	🚗	📦	RMB
CL501408	Intelligent	12/240		

- This product is mainly used for line break point search, can be operated through walls, convenient and safe.
- Newly designed circuit board, sensitive, stable, intelligent, capable of detecting both neutral and live wires.
- Using precise NCV sensing head, sensitive measurement, one click sensitivity switching, external PC protective case, sturdy and durable, anti wear.
- Equipped with LED flashlight lighting, when the power is turned off, click the flashlight button to activate the LED flashlight.
- Frequency: 50Hz/60Hz Alarm method: Sound/Light
- Flashlight: White LED lighting
- Safety level: CECATII 100 CATIV 600V
- Power supply: 2X1.5V
- Operating temperature: 0-40 degrees Celsius
- AC voltage: indicator light on/12-1000V indicator light off/48-1000V

Lithium LED strong light hand lamp



Item NO.	Size	🚗	📦	RMB
CL712501	Portable	1/24	0.97	

- Double lithium electric bright light can reach 6-8 hours
- When charging, first plug the charging AC end directly into the AC110-240V/50-60Hz power socket.
- Then pull out the protective cover on the DC charging base of the product and insert the other end of the charger (DC plug) directly into the product
- In the DC socket, the indicator light is red. When the red light turns to green, it means that the battery is full.
- When fully charged, it takes about 6 hours to use, press the front switch down once for strong light, and press it twice for weak light.

High pressure explosion-proof mine Test Pencil



Measurement range: AC380-2000V
Insulation voltage: AC2800V
Anti breakdown and withstand voltage: AC2500V for 5 seconds

Item NO.	Size	🚗	📦	RMB
CL501505	380V-2000V	30/360		

- This product is a professional explosion-proof, waterproof mining high-voltage test pencil
- The pen body adopts imported high-insulation ABS engineering plastics, with safety isolation ring design to prevent creeping electricity
- Double seal waterproof
- Probe head meets German GS requirements.

Led Head Lamp



Item NO.	Size	🚗	📦	RMB
CL712502	Headworn	60/120	0.17	

- Long life, high efficiency and energy saving LED bulb, energy saving and environmental protection, not easy to damage, super brightness
- Made of double anodized alumina with pressure switch (on/off)
- Dustproof and splash proof design, operating temperature from -20°C to +50°C

Strong Aluminum Alloy LED Flashlight



Item NO.	Size	🚗	📦	RMB
CL711302	4"	10/100	0.12	

- Made of dual anodized aluminum, waterproof and shockproof with pressure switch (on/off)
- High quality LED bulb with long service life, low power consumption and high brightness
- Please use alkaline battery, which can last for 300 minutes. Operating temperature from -20 °C to +50°C

Magnetic Working Lamp



Item NO.	Size	🚗	📦	RMB
CL712310	10M	30		

- Power: 10W-100W Power supply mode: 220V Power cable length: 10M
- The lampshade is made of galvanized steel plate, and the handle is ABS engineering plastic, resistant to corrosion and fall
- Advanced sheath wire, 0.75 square single strand copper wire, to ensure safety
- Net type protective cover can be opened and closed, convenient and quick replacement of the bulb
- 360-degree rotating hook, convenient to adjust the lighting Angle arbitrarily
- Strong magnet inlaid behind the work lamp can be hung about 1.2kg



Led Working Lamp



Item NO.	Size	Weight	Volume	RMB
CL709505	COB LED	12/72		

- Dual lamp design, multiple hanging ways, with strong magnet
- Adjustable brightness, easy to read digital display of electric quantity
- COB main light LED top secondary light has long life, good brightness and stability
- Smart charging can be USB car charging, PC and mobile power charging
- Built-in 18650 lithium battery, supporting 6H COB lighting, small size and easy to carry
- Used for life lighting, car maintenance, cycling, outdoor travel, etc

Plastic pipe hot melt device (constant temperature)



Item NO.	Size	Weight	Volume	RMB
CL614511	20-32mm	10	2.26	
CL614512	20-63mm	10	2.91	

- Mirror polished pure aluminum heating plate, high performance electronic temperature controller
- New ABS handle, flame retardant and ironing silicone rubber wire
- The whole heating speed is fast, the temperature control performance is high, and the wall tube is not adhered to

Premium Hot Melt Glue Gun



Item NO.	Size	Weight	Volume	RMB
CL619960	60W	6/30		
CL619900	100W	6/30		

- Quickly heat up and power on for 5 minutes before normal use.
- Temperature regulation and automatic constant temperature design, suitable for EVA resin synthetic rubber strips, polyurethane synthetic rubber strips, and various low melting point rubber strips.
- Efficient and energy-saving constant temperature working mode reduces the power consumption of the sol gun by 50%
- The sol gun adopts an integrated temperature control heating element, which is durable and has a long service life.

T Type Digital Multimeter



Item NO.	Size	Weight	Volume	RMB
CL700507		100		

- This product is a pocket digital multimeter that can be used to measure parameters such as DC voltage and AC voltage, DC current, resistance, diodes, on/off tests, etc.

Hot Glue Gun



Item NO.	Size	Weight	Volume	RMB
CL611160	60W	6/48	0.30	51.82
CL611180	80W	6/48	0.30	

- Meet the manufacturing requirements of QB/T 5128 standard
- Using high-tech ceramic PTC thermistor as heating component, fast temperature rise
- PTC thermistor automatically keeps constant temperature to prevent damage to glue gun due to heating, saving energy and extending service life
- The electrical insulation strength does not break down when 3750V/min is energized, and is between 110V/240V
- Normal use in AC or DC, not limited by voltage fluctuation, safe use of built-in safety wire

Digital Multimeter



Item NO.	Size	Weight	Volume	RMB
CL700505		1/40	0.39	

- Housing made of impact-resistant plastic, double insulation safety test protection line including battery
- Large screen display, clear handwriting; Strong anti-interference ability
- Full protection function, anti-high-voltage touch circuit design
- Measuring range: DC voltage, AC and DC current, resistance, diode, triode measurement
- Low voltage indication to keep the measured data for easy viewing of test results
- Please refer to the instruction manual before use

Digital Multimeter



Item NO.	Size			RMB
CL700503		1/50	0.24	

- Ammeter housing is made of impact-resistant ABS material with rubber protective outer frame on the outer edge
- Used for DC and AC/DC voltage/current measurement, resistance measurement, frequency and capacitance measurement channels and diode and transistor measurement

Intelligent digital multimeter



Item NO.	Size			RMB
CL700506		90		

- This product is a portable digital multimeter with stable performance, high accuracy, low power consumption, novel structure, safety and reliability.
- It can measure DC voltage, AC voltage, etc., and has non-contact voltage detection function.

Intelligent Clamp Multimeter



Item NO.	Size			RMB
CL700508		50		

- This product is battery driven and features an automatic range clamp digital multimeter with true RMS.
- The instrument has a display of 6000 words and adopts an LCD display screen with backlight display. The reading is clear and the measurement is accurate.

Infrared temperature instrument



Item NO.	Size			RMB
CL713501		60		

- The thermometer adopts non-contact infrared sensing technology to safely, accurately, quickly, and reliably measure targets.
- Widely applicable for measuring high temperatures, hazards, and difficult to access surface temperatures in industries such as machinery, chemical engineering, ceramics, light industry, food, metallurgy, power, and heat treatment.
- Temperature measurement range: -50 °C -600 °C (-58 °F -1112 °F)
- Accuracy: $\pm 2^{\circ}\text{C}$ or $\pm 2\%$ °C

Clamp Multimeter



Item NO.	Size			RMB
CL700504		100	0.20	

- The design meets the safety standards of DIN EN 61010
- The housing is made of impact-resistant plastic with a maximum current range of AC600V
- Double insulation safety test protection line with battery
- Large screen display, clear handwriting;Strong anti-interference ability
- Full protection function, anti-high-voltage touch circuit design
- Measuring range: can detect conventional AC/DC, voltage and resistance
- Low voltage indication to keep the measured data for easy viewing of test results
- Please refer to the instruction manual before use



Mechanical Protection Type Digital Multimeter



Item NO.	Size	30	30	RMB
CL700502	mechanical			

- The housing is made of impact-resistant plastic with a maximum current range of AC600V
- Double insulation safety test protection line with battery
- Large screen display, clear handwriting; Strong anti-interference ability
- Full protection function, anti-high-voltage touch circuit design
- Measuring range: can detect conventional AC/DC, voltage and resistance
- Low voltage indication to keep the measured data for easy viewing of test results
- Please refer to the instruction manual before use

Muti-function Automobile Maintenance Multimeter



Item NO.	Size	30	30	RMB
CL700501	multi-function			

- The design meets the safety standards of DIN EN 61010
- The case is made of impact-resistant plastic with a protective rubber outer frame
- Double insulation safety test protection line with battery
- Large screen display, clear handwriting; Strong anti-interference ability
- Full protection function, anti-high-voltage touch circuit design
- Measuring range: auto speed, auto closure Angle, air conditioning temperature test
- Please refer to the instruction manual before use



VDE
绝缘

WELDING&CUTTING TOOLS



Oxygen Reductor



Item NO.	Input	Output	🔧	📦	RMB
CL604410	15MPa	1.5MPa	12	0.83	

- Valves are made of high quality brass for greater thickness and durability
- Handwheel screw is manufactured and has a pinball design for more free regulation of the intake pipe with sintered brass filter
- Tip: The oxygen pressure reducing valve should be strictly prohibited from contacting corrosive liquid or grease. When it stops working, the remaining air in the pressure reducing valve should be discharged, and then the adjusting screw should be loosened to avoid long-term compression deformation of the elastic component and impact vibration

Carbon dioxide regulator



Item NO.	Input	Output	🔧	📦	RMB
CL604225	15MPa	0.15MPa	12		

- Valves are made of high quality brass for greater thickness and durability
- Used for flame cutting, welding or high flow gas decompression, etc
- Tip: the carbon dioxide pressure reducing valve should be strictly prohibited from contacting corrosive liquid or grease. When it stops working, the remaining air in the pressure reducing valve should be discharged, and then the adjusting screw should be loosened to avoid long-term compression deformation of the elastic component and impact vibration

Acetylene pressure reducer



Item NO.	Input	Output	🔧	📦	RMB
CL604515	1.6MPa	0.15MPa	12	0.98	

- Valves are made of high quality brass for greater thickness and durability
- Handwheel screw is manufactured with marble design for more free regulation, and intake pipe with sintered brass filter
- Tip: Acetylene reducing valve should be strictly prohibited from contacting corrosive liquid or grease. When it stops working, the remaining air in the reducing valve should be discharged, and then loosen the adjusting screw to avoid long-term compression deformation of the elastic component and to avoid impact and vibration

Argon pressure reducer



Item NO.	Input	Output	🔧	📦	RMB
CL604306	15MPa	0.15MPa	12		

- Valves are made of high quality brass for greater thickness and durability
- Used for flame cutting, welding or high flow gas decompression, etc
- Tip: the carbon dioxide pressure reducing valve should be strictly prohibited from contacting corrosive liquid or grease. When it stops working, the remaining air in the pressure reducing valve should be discharged, and then the adjusting screw should be loosened to avoid long-term compression deformation of the elastic component and impact vibration

Propane Reductor



Item NO.	Input	Output	🔧	📦	RMB
CL604610	1.6MPa	0.15MPa	12	0.83	

- Valves are made of high quality brass for greater thickness and durability
- Handwheel screw is manufactured and has a pinball design for more free regulation of the intake pipe with sintered brass filter
- Tip: The propane pressure reducing valve should be strictly prohibited from contacting corrosive liquid or grease. When it stops working, the remaining air in the pressure reducing valve should be drained, and then the adjusting screw should be loosened to avoid long-term compression deformation of the elastic component to avoid impact and vibration

Q3 Propane pressure reducer



Item NO.	Size	🔧	📦	RMB
CL604623	0-0.3MPa	12	0.83	

- The body is made of high-quality aluminum alloy by forging and pressing, with shot blasting and chrome plating and dual-color oxidation treatment on the surface
- Body and valve cover are connected by integral thread, labeled with laser marking and mold protruding
- Tip: The propane pressure reducing valve should be strictly prohibited from contacting corrosive liquid or grease. When it stops working, the remaining air in the pressure reducing valve should be discharged, and then loosen the adjusting screw to avoid long-term compression deformation of the elastic component to avoid impact and vibration

Q3 Argon pressure reducer



Item NO.	Size	Weight	Volume	RMB
CL604624	0-32l/MIN	12	1.00	

- The body is made of high-quality aluminum alloy by forging and pressing, with shot blasting and chrome plating and dual-color oxidation treatment on the surface
- Body and valve cover are connected by integral thread, labeled with laser marking and mold protruding
- Tip: The argon gas reducing valve should be strictly prohibited from contacting corrosive liquid or grease. When it stops working, the remaining air in the reducing valve should be discharged, and then loosen the adjusting screw to avoid long-term compression deformation of the elastic component to avoid impact and vibration

Drop proof oxygen meter



Item NO.	Size	Weight	Volume	RMB
CL604401		30	0.28	

- Anti-fall, small, refined, durable, efficient and safe;
- Small volume, large flow, compact structure, good impact resistance;
- Double meter head, clear scale, adjustable switch embossing design, air inlet adopts built-in precision filter
- Filter impurities, save oxygen gas by 30%, the flow is stable in the specified range under the change of input pressure, and can be adjusted arbitrarily, and maintain the set flow value.
- Display of memory capacity for high-pressure oxygen cylinders
- Input pressure: 15MPa Output pressure: 0.8mpa Output volume: 20m3/h

Oxygen Reductor



Item NO.	Size	Weight	Volume	RMB
CL604621	0-25.MPa	12	1.00	

- The body is made of high-quality aluminum alloy by forging and pressing, with shot blasting and chrome plating and dual-color oxidation treatment on the surface
- The body and the valve cover are connected by integral thread, labeled with laser marking and mold embossed, and the intake pipe is equipped with sintered brass filter
- Tip: The propane pressure reducing valve should be strictly prohibited from contacting corrosive liquid or grease. When it stops working, the remaining air in the pressure reducing valve should be drained, and then the adjusting screw should be loosened to avoid long-term compression deformation of the elastic component and impact vibration

Drop proof acetylene meter



Item NO.	Size	Weight	Volume	RMB
CL604501		30	0.45	146.28

- Anti-fall, small, refined, durable, efficient and safe;
- Small volume, large flow, compact structure, good impact resistance;
- Double meter head, clear scale, adjustable switch embossing design, air inlet adopts built-in precision filter
- Filter impurities, save oxygen gas by 30%, the flow is stable in the specified range under the change of input pressure, and can be adjusted arbitrarily, and maintain the set flow value
- Memory capacity display for gas cylinders

Acetylene Reductor



Item NO.	Size	Weight	Volume	RMB
CL604622	0-0.25MPa	12	1.19	

- The body is made of high-quality aluminum alloy by forging and pressing, with shot blasting and chrome plating and dual-color oxidation treatment on the surface
- Body and valve cover are connected by integral thread, labeled with laser marking and mold protruding
- Tip: Acetylene pressure reducing valve should be strictly prohibited from contacting corrosive liquid or grease. When stopping working, the remaining air in the pressure reducing valve should be discharged, and then loosen the adjusting screw to avoid long-term compression deformation of the elastic component and impact vibration

Soldering Torch(Professional)



Item NO.	Size	Weight	Volume	RMB
CL605206	6	15		
CL605212	12	20	0.27	

- The main body is cast in copper, polished as a whole, with pure copper knob, which can be fastened and precise
- Stainless steel conduit does not oxidize and keeps the surface clean
- Good wind resistance and stable outdoor performance.



T Type Cutting Torch



Item NO.	Size	🔧	📦	RMB
CL605111	30	1/20		
CL605112	100	1/20		

- The main body is made of all copper, with overall polishing treatment, pure copper screws, and precise fastening.
- Pure copper conduit, cutting nozzle, strong firepower, good windproof performance, stable performance, safe and durable.

Welding Nozzle Ring



Item NO.	Size	🔧	📦	RMB
CL606001-1	30-1	5/300	0.04	
CL606001-2	30-2	5/300	0.04	
CL606001-3	30-3	5/300	0.03	
CL606002-1	100-1	5/300	0.05	
CL606002-2	100-2	5/300	0.05	
CL606002-3	100-3	5/300	0.05	

- It is made of high quality brass and machined with high precision, the center hole is smooth and clean, the wind line is clear and straight, and the preheating is uniform. It has the characteristics of fast cutting speed, small cutting seam, stable cutting, smooth and durable cutting surface, and special cutting torch with 45° taper

Cutting Torch(Professional)



Item NO.	Size	🔧	📦	RMB
CL605101	30	15	0.60	
CL605102	100	15	0.69	

- The main body is cast in copper, polished as a whole, with pure copper knob, which can be fastened and precise
- Stainless steel conduit does not oxidize and keeps the surface clean
- Good wind resistance and stable outdoor performance

Propane nozzle



Item NO.	Size	🔧	📦	RMB
CL606201-1	30-1	5/300	0.04	
CL606201-2	30-2	5/300	0.04	
CL606201-3	30-3	5/300	0.03	
CL606202-1	100-1	5/300	0.05	
CL606202-2	100-2	5/300	0.05	
CL606202-3	100-3	5/300	0.05	

- It is made of high quality brass and machined with high precision, the center hole is smooth and clean, the wind line is clear and straight, and the preheating is uniform. It has the characteristics of fast cutting speed, small cutting seam, stable cutting, smooth and durable cutting surface, and special cutting torch with 45° taper

Cutting Torch(Professional)



Item NO.	Size	🔧	📦	RMB
CL605103	300	15	1.02	

- The main body is cast in copper, polished as a whole, with pure copper knob, which can be fastened and precise
- Stainless steel conduit does not oxidize and keeps the surface clean
- Good wind resistance and stable outdoor performance

Gas Shielded Welder's pliers



Item NO.	Size	🔧	📦	RMB
CL618408	8"	6/60		

- Made of high-quality high carbon steel precision forging, sturdy and durable, with high-frequency quenching of the cutting edge and sharp shearing
- According to the requirements of gas shielded welding, audit exclusive rights are used for disassembling and pulling welding wires and nozzles, removing welding slag inside and outside the nozzle, cutting welding wires, and simple hammering functions.
- Dual color handle, comfortable grip, suitable for long-term work.

Lpg Torch(single open)



Item NO.	Size			RMB
CL611930	30	36		
CL611935	35	36		
CL611950	50	30		


- This product is a welding tool made of liquefied gas, with low cost, safety and convenience, no pollution and stable performance
- It can be used for metal welding, heat treatment of mechanical parts, roof repair, meat processing, communication cable maintenance, wood baking, granite surface treatment, etc

Bent Handle Pure Copper Electric Welding Pliers




Item NO.	Size		RMB
CL604908	800A	40	

- The pliers are made of high-quality pure purple copper with excellent conductivity.
- The handle adopts a curved design, making it comfortable to grip. It is made of special insulation materials, which are resistant to high temperatures and not prone to fatigue or hot hands after long-term use.



L	A	H	W kg
265	91.00	38.00	0.415

Lpg Torch(Double open)

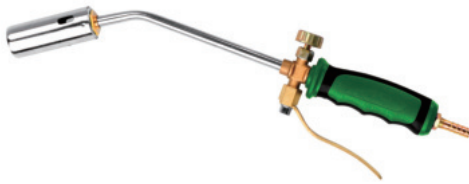

Item NO.	Size			RMB
CL611901	30	36		
CL611902	35	36		
CL611903	50	30		

- This product is a welding tool made of liquefied gas, with low cost, safety and convenience, no pollution and stable performance
- It can be used for metal welding, heat treatment of mechanical parts, roof repair, meat processing, communication cable maintenance, wood baking, granite surface treatment, etc

Not Hot Electric Welding Pliers



Item NO.	Size		RMB
CL604901	500A	30	

- The clamp head is made of copper, and the handle is made of special insulating and heat-resistant material, which is safe, reliable and leakproof
- Professional heavy-duty electric welding clamp is adopted, which is highly professional



L	A	H	W kg
269	99.00	36.75	0.485

Quick Install Type Welding Clamp



Item NO.	Size		RMB
CL615701	600-800a	30	
CL615702	1000a	30	

- The clamp head is made of high-quality pure copper, and the handle is made of special insulating and heat-resistant material, which is safe, reliable and leakproof
- Easy to use, no disassembly handle wiring



Size	L	A	H	W kg
600-800A	256	90.00	35.85	0.555
1000A	285	101.00	41.00	0.725

Not Hot Electric Welding Pliers



Item NO.	Size		RMB
CL604902	800A	30	

- The clamp head is made of copper, and the handle is made of special insulating and heat-resistant material, which is safe, reliable and leakproof
- Professional heavy-duty electric welding clamp is adopted, which is highly professional



L	A	H	W kg
293	99.00	36.00	0.595



Pure Copper Not Hot Electric Welding Pliers(Professional)



Item NO.	Size	Icon	RMB
CL605008	800A	5/30	

- The clamp head is made of high quality copper with good electrical conductivity
- The handle is made of special insulation material, which can withstand high temperature and is not hot when used for a long time



L	A	H	W kg
295	107.00	39.43	0.630

High Pressure Resistance Oxygen Hose (Professional Grade)



Item NO.	Size	Icon	Icon	RMB
CL604708	Φ8X28m	5		

- Hose with special formula treatment, flexible bremsstrahlung strong, high temperature and cold resistance
- Working pressure: 2.0mpa, blasting pressure: 6.0mpa

MINI Not Hot Electric Welding Pliers



Item NO.	Size	Icon	RMB
CL604903	300A	50	

- The clamp head is made of high quality copper with good electrical conductivity
- The handle is made of special insulation material, which can withstand high temperature and is not hot when used for a long time



L	A	H	W kg
202	74.00	31.34	0.285

High Pressure Resistance Ethine Hose (Professional Grade)



Item NO.	Size	Icon	Icon	RMB
CL604808	Φ8X28m	5		

- Hose with special formula treatment, flexible bremsstrahlung strong, high temperature and cold resistance
- Working pressure: 2.0mpa, blasting pressure: 6.0mpa


Conjoined Hose (Oxygen Acetylene)



Item NO.	Size	Icon	Icon	RMB
CL604748	Φ8X20m	5		

- Hose with special formula treatment, flexible bremsstrahlung strong, high temperature and cold resistance
- Suitable for oxygen, acetylene gas, with cylinder pressure reducer, welding and cutting torch
- Working pressure: 2.0mpa Blasting pressure: 6.0Mpa

High-pressure gas Air Hose(Professional)



Item NO.	Size	Icon	Icon	RMB
CL614604	Φ10X30m	5		
CL614605	Φ10X100m	1		

- Aging resistance. The material of this product is PVC plus a small amount of LG NBR
- High pressure resistance. The working pressure is 30KG and the bursting pressure is 120KG, which is 5 times of the ordinary inflatable tube
- Cold-resistant agent is added to the material to make the pipe have good weather resistance. Summer is not soft, winter is not hard
- Good wear resistance. The pipe is made of polyester line and goods woven bonding technology, so that the pipe is self
- Very light weight, about 30% lighter than rubber hose. About 50% lighter than steel tube

High Pressure Gas Tube (Professional Grade)



Item NO.	Size	🔧	📏	RMB
CL614601	Φ10X28mm	5		

- Hose with special formula treatment, flexible bremsstrahlung strong, high temperature and cold resistance
- Working pressure: 0.8-1.0mpa, bursting pressure: 3.0mpa

High pressure resistance Air cannon tube (Industrial grade)



Item NO.	Size	🔧	📏	RMB
CL710704	Φ13X20m	4	8.23	
CL710703	Φ13X20m	5	7.52	

- Hose with special formula treatment, flexible bremsstrahlung strong, high temperature and cold resistance
- Working pressure: 0.8-1.0mpa, bursting pressure: 3.0mpa

Handheld welding mask



Item NO.	Size	🔧	📏	RMB
CL605401		60	0.22	

- You can hold it with either hand and observe it from a free Angle
- Enhanced composite material manufacturing, anti - fall, anti - ene, heat resistance, prevent ultraviolet through

Head-mounted welding mask



Item NO.	Size	🔧	📏	RMB
CL605402		40	0.42	

- Comfortable to wear and easy to use, it can effectively prevent strong light and hot spatter from hurting eyes and face
- Made of composite materials, it is resistant to ene and heat resistant, and can prevent ultraviolet rays from passing through

Semi-helmet type auto-dimming welding mask



Item NO.	Size	🔧	📏	RMB
CL605406		32	0.35	93.33

- Portable and practical, used for face protection, no light leakage, no face baking, comfortable to wear
- Automatic light change, can prevent infrared and ultraviolet rays in arc light, effectively protect glasses

Head-mounted Automatic dimming welding mask



Item NO.	Size	🔧	📏	RMB
CL605405		2/16	0.65	188.89

- Solar panels automatically charge when welding, super long life
- High-frequency photosensitive probe instantly detects arc light generated or disappeared by welding
- Automatic light changing screen prevents infrared and ultraviolet rays in arc light, effectively protecting eyes
- Dust baffle design According to ergonomic design, arc dust baffle plate protective cover according to
- Press the button to remove the external protective cover
- Brightness adjustment knob can freely adjust the brightness during welding
- Head hoop adjustment knob adjusts the tightness of head hoop
- Round protective cover double protective glasses and protective refractive lens



WRENC SERIES



Transparent Tube Zipper Grease Gun



Item NO.	Size	🔧	📦	RMB
CL700416	600cc	15	1.52	

- Maximum pressure of oil gun: 10,000 psi
- Transparent plastic tube can see the refueling situation clearly
- 600cc butter can be used in bulk or in barrels
- Double pistons, 2.4cc oil output from pressure rod at one time
- Suitable for: trucks, ships, lawn mowers, roller and excavators and other mechanical equipment

Double Piston Replaceable Grease Gun



Item NO.	Size	🔧	📦	RMB
CL700406	600cc	10	3.01	

- High strength pressure resistant zinc alloy casting head, high strength steel gun body, oil resistant and non-slip jacket, safe and durable Alloy material exhaust valve, convenient exhaust
- Suitable for use in narrow Spaces, easy to fill oil even if the handle is not fully opened
- Unique design, with a variety of refueling methods, bulk oil is used in normal state, if it is necessary to fill oil barrel Remove the handle and turn over the rubber stopper inside the barrel
- Unique design, the pull rod can drive the rubber piston to move at the same time, which is beneficial to expel the air inside the cylinder
- When you rotate 90 degrees, the piston disengages from the pull rod
- Suitable for 3 types of oil filling: barrel filling, sealed oil tank, bulk oil
- High strength heat treatment spring ensures constant pressure balance during oil filling
- Special self-locking device makes perfusion safe and convenient
- The special design of the nozzle increases the self-locking device of the steel ball to ensure that the oil does not backflow during work
- The maximum pressure of the oil gun can reach 700KG/cm

G17 High Pressure Grease Gun



Item NO.	Size	🔧	📦	RMB
CL700414	400CC	12	1.39	

- High strength zinc alloy die casting head design. High compressive strength
- Deflating nozzle and oil injection design, more convenient and quick to use
- Self-locking steel ball device is installed in the oil outlet hole of the nozzle to ensure no oil backflow during work
- High strength heat treated spring ensures constant pressure balance

T Type Grease Gun



Item NO.	Size	🔧	📦	RMB
CL700434	400cc	1/20		76.00

- Working pressure 4500PSI Burst pressure: 6000PSI
- Green painted oil barrel, wear-resistant, with a longer service life.
- Double vent nozzles and self-locking design make oil transportation more convenient.
- Standard 14 ounce plain butter, sealed oil tank, and 400cc bulk oil can be used.
- Suitable for: mechanical equipment such as cars, trucks, ships, lawn mowers, rollers, and tractors.

High Pressure Grease Gun



Item NO.	Size	🔧	📦	RMB
CL700446	600cc	1/20		

- Maximum pressure resistance of oil gun: 10000PSI
- Green spray coating, wear-resistant, and has a longer service life.
- The sealed leather ring design can strongly absorb oil, and can absorb up to 90% butter in one go.
- Suitable for: mechanical equipment such as cars, trucks, ships, lawn mowers, rollers, and tractors.

Stainless Steel Tube Gear Type Grease Gun



Item NO.	Size	🔧	📦	RMB
CL700418	800CC	15		

- Two-stage reduction gear drive, more labor-saving, every part of your force can be balanced to the mandrel, the consistency of butter easy filling.
- Super long handle, more labor-saving, precise processing of rack and pinion to reduce wear, more durable.



VDE
绝缘



Industrial Pneumatic Oiler



Item NO.	Size	Icon	Unit	RMB
CL700846	45L	1		

Technical parameters:

Input air pressure: $\leq 1.0\text{mpa}$

Oil outlet pressure: 40-45mpa

Oil output: 2.2L/min

Gas consumption: $0.6\text{m}^3/\text{Min}$

Noise: 80dB

- Corrosion resistant design, key components are made of nickel aluminum and hard chromium to extend their service life.
- The pneumatic motor assembly uses a small number of moving parts to reduce downtime and maintenance costs.
- The large ventilation port design can effectively use the supplied compressed air to ensure the continuous operation of the pump without icing.
- The shell of the die-casting aluminum pneumatic motor adopts advanced die-casting machine equipment and technology to ensure that the pump body has no air holes, Extend service life.
- The oil pump is equipped with a filter to ensure that the nozzle is not easily blocked and improve the user's work efficiency.
- The barrel body adopts a high-density pickling board one-time stamping type, which is sturdy and durable.
- Comfortable armrest grip, equipped with swivel casters, flexible and convenient movement, time-saving and labor-saving.

High Pressure Pneumatic Oiler



Item NO.	Size	Icon	Unit	RMB
CL700808	12L	1		
CL700840	40L	1		

Pedal Grease Gun



Item NO.	Size	Icon	Unit	RMB
CL700812	12L	1		

- It is suitable for various machines and vehicles to add lubricating oil.
- Easy to operate and move.

High Pressure Pneumatic Oiler Head



Item NO.	Size	Icon	Unit	RMB
CL700841	12L	4		

- This product is an accessory for high-pressure pneumatic oiler
- Suitable for all kinds of power machinery butter filling operations

High Pressure Pneumatic Oiler Gauge



Item NO.	Size	Icon	Unit	RMB
CL700845		1		

- This product is an auxiliary part of high-pressure pneumatic oiler
- Suitable for various types of high-pressure pneumatic oiler

VDE
绝缘

Engine oil pot(Iron)



Item NO.	Size			RMB
CL700201	250CC	10/120	0.10	

- Thickened metal pot body, aluminum alloy body, high pressure configuration, not easy to leak oil, firm and practical
- Used for: machine tools, motorcycles, electric vehicles, cars, excavators, bicycles, household appliances and daily maintenance

Ultra-low-level Dual-pump Horizontal Jack



Item NO.	Size			RMB
CL707723	3T	1		

- Double cylinder rapid lifting, lifting force saving range, lightweight, durable, safe and reliable
- Load 3 tons, lifting range 73~495mm
- Wider and thicker tray, more stable roof, wider 4 wheels, more stable when lifting standing
- Jack oil: Please use no. 32 hydraulic oil

Engine oil pot(Iron)



Item NO.	Size			RMB
CL700102	250CC	10/60	0.17	17.24
CL700103	450CC	10/60	0.18	

- Thickened metal pot body, aluminum alloy body, high pressure configuration, not easy to leak oil, firm and practical
- Used for: machine tools, motorcycles, electric vehicles, cars, excavators, bicycles, household appliances and daily maintenance

Horizontal Jack



Item NO.	Size			RMB
CL707712	2T	1	8.78	

- Load 2 tons, lifting range 130~330mm weight 7.28kg
- Wider and thicker tray, more stable roof, wider 4 wheels, more stable when lifting standing
- Jack oil: Please use no. 32 hydraulic oil

Engine oil pot(Plastic)



Item NO.	Size			RMB
CL700202	250CC	10/120	0.08	

- Using engineering plastic body, aluminum alloy body, not easy to leak oil, solid and practical
- Used for: machine tools, motorcycles, electric vehicles, cars, excavators, bicycles, household appliances and daily maintenance

Horizontal jack



Item NO.	Size			RMB
CL707733	3T	1		

- Load 2 tons, lifting range 130~460mm
- Wider and thicker tray, more stable roof, wider 4 wheels, more stable when lifting standing
- Jack oil: Please use no. 32 hydraulic oil



Vertical Jack



Item NO.	Size	🔧	📏	RMB
CL713402	2t	10	2.40	120
CL713403	3.5t	8	2.60	
CL713405	5t	5	3.60	
CL713408	8t	4	5.50	
CL713410	10t	4	6.00	
CL713412	12t	4	6.90	
CL713416	16t	2	8.50	
CL713420	20t	2	11.00	
CL713432	32t	2	16.00	
CL713450	50t	1	22.00	

- It is made of high-quality steel and has the advantages of high strength and long service life
- The plug is designed with a special anti slip surface for better anti slip. It is equipped with a safety valve structure, which can effectively avoid danger caused by overload during use
- Advanced sealing system and excellent sealing parts significantly improve the service performance and service life of the jack
- The main parts of the jack are thickened to effectively improve the mechanical 123 performance and service life of the jack

Vertical Jack



Item NO.	Size	🔧	📏	RMB
CL707602	2T	10	2.35	
CL707603	3.2T	4	3.10	
CL707605	5T	4	5.72	
CL707608	8T	4	6.68	
CL707610	10 T	4	6.66	
CL707612	12 T	4	7.37	
CL707616	16 T	2	8.39	
CL707620	20 T	2	10.60	
CL707632	32 T	1	22.36	
CL707650	50 T	1	26.79	

- Made of high quality steel, with advantages of high strength and long service life head adopts special torx antiskid surface design, prevent slippery, attached to the relief valve structure, which can effectively avoid the risk caused by overload, in use process advanced sealing system and excellent sealing parts, obviously improve the use performance and service life of jack, oil injection hole design adopts screw type, easy tear open outfit, easy for injection, oil drain
- The main parts of the jack are thickened and enlarged, effectively improving the mechanical properties and service life of the whole jack
- Widely used in factories, mines, transportation and other departments as vehicle repair and other lifting, supporting and other work

Hydraulic Jack (Industrial Grade)



Item NO.	Size	对应泵浦	RMB
CL707501	RMC-101	CP-180	
CL707502	RMC-201	CP-180	
CL707503	RMC-301	CP-180	
CL707504	RMC-501	CP-700	
CL707505	RMC-1001	CP-700	
CL707506	RSC-1050	CP-180	
CL707507	RSC-2050	CP-700	
CL707508	RSC-3050	CP-700	
CL707509	RSC-5050	CP-700	
CL707510	RSC-10050	CP-700	
CL707511	RSC-10100	CP-180	
CL707512	RSC-10150	CP-700	
CL707513	RSC-20100	CP-700	
CL707514	RSC-20150	CP-700	
CL707515	RSC-30100	CP-700	
CL707516	RSC-30150	CP-700	
CL707517	RSC-50100	CP-700	
CL707518	RSC-50150	CP-700	
CL707519	RSC-100100	P-801	
CL707520	RSC-100150	P-801	



This product should be equipped with hand pump deer use

Changlu outside surface roasts the paint processing using hydraulic jacks, the luster bright, not easy to rust, piston made from high carbon steel material, and the hard chromium plating processing, has small volume, ability to work, especially in the use of narrow space, flexible and convenient and has great strength, and other functions, widely used in automobile, electric power, chemical industry, shipbuilding, machinery and other industries

Detail parameters of hydraulic jack

型号	吨位	行程	有效面积	储油量	本体高度	延长高度	外形尺寸	油缸内径	柱塞直径	接头尺寸	重量
RMC-101	10	11	11.3	0.01	47	58	81*56	43	38	3/8"-19	1.5
RMC-201	20	11	22	0.03	52	63	100*77	60	53	3/8"-19	2.7
RMC-301	30	12	31.1	0.05	63	75	115*95	75	63	3/8"-19	4.5
RMC-501	50	16	56.7	0.11	69	85	138*115	95	85	3/8"-19	7
RMC-1001	100	16	95	0.21	86	102	185*160	130	110	3/8"-19	15
RMC-2001	200	25	240	0.74	96	121	265*240	195	175	3/8"-19	37
RSC-1050	10	50	13.8	0.07	106	238.9	58	43	38	3/8"-19	3
RSC-10100	10	100	13.8	0.14	156	389	58	43	38	3/8"-19	3.5
RSC-101500	10	150	13.8	0.22	206	239	58	43	38	3/8"-19	4.3
RSC-2050	20	50	26.39	0.14	106	257	88	65	58	3/8"-19	5.5
RSC-20100	20	100	26.39	0.28	156	407	88	65	58	3/8"-19	9
RSC-20150	20	150	26.39	0.42	206	557	88	65	58	3/8"-19	10
RSC-3050	30	50	41.8	0.2	111	257	106.9	75	68	3/8"-19	6.8
RSC-30100	30	100	41.8	0.41	161	407	106.9	75	68	3/8"-19	12
RSC-30150	30	150	41.8	0.62	211	361	106.9	75	68	3/8"-19	14
RSC-5050	50	50	78.5	0.35	111	161	127	95	85	3/8"-19	9.8
RSC-50100	50	100	78.5	0.7	161	261	127	95	85	3/8"-19	18
RSC-50150	50	150	78.5	1.06	211	361	127	95	85	3/8"-19	22
RSC-10050	100	50	103.7	0.66	121	171	177	130	110	3/8"-19	24
RSC-100100	100	100	103.7	1.32	171	271	177	130	110	3/8"-19	30
RSC-100150	100	150	103.7	2	221	371	177	130	110	3/8"-19	36
QF50T-125	50	125	78.5	0.98	263	388	Φ132*263	100	70	3/8"-19	23
QF50T-160	50	160	78.5	1.25	298	458	Φ132*298	100	70	3/8"-19	25
QF50T-200	50	200	78.5	1.5	338	538	Φ132*338	100	70	3/8"-19	31
QF100T-125	100	125	103.7	1.92	291	416	Φ172*291	140	100	3/8"-19	44
QF100T-160	100	160	103.7	2.46	326	486	Φ172*326	140	100	3/8"-19	49
QF200T-200	100	200	103.7	3.08	366	566	Φ172*366	140	100	3/8"-19	54
QF200T-125	200	125	266.3	3.93	321	446	Φ244*321	200	150	3/8"-19	99
QF200T-160	200	160	266.3	5.01	356	516	Φ344*356	200	150	3/8"-19	108
QF200T-200	200	200	266.3	6.28	396	596	Φ244*396	200	150	3/8"-19	118
QF320T-200	320	200	432.1	9.81	427	627	Φ315*427	250	180	3/8"-19	113

Hand Pumping



Item NO.	Size	Icon	Weight (kg)	RMB
CL707550	CP-180		4.47	
CL707570	CP-700		10.73	
CL707580	P-801		18.50	

- Manual pump is easy to operate and has the same function as the electric one
- Pressure can keep the middle stop, internal design of high pressure safety protection hydraulic valve
- 2M high pressure oil pipe with quick joint
- Suitable for hydraulic jacks, split hydraulic pliers, cutting row, bending row, punching tools, etc
- Thickened metal body, aluminum alloy body, strong and durable

Chain Block



Item NO.	Size	Lifting weight (T)	Lifting height (m)	System load (T)	Minimum distance between two hooks (mm)	Full load bracket pull (N)	Number of lifting strokes	Diameter of chain (mm)	RMB
CL802801	1TX3m	1	3	1.5	306	304	1	6	
CL802802	2TX3m	2	3	3	444	314	2	6	
CL802803	3TX3m	3	3	4.5	486	343	2	8	
CL802804	5TX3m	5	3	7.5	616	383	2	10	
CL802805	10TX3m	10	3	12.5	700	392	4	10	
CL802811	1TX6m	1	6	1.5	306	304	1	6	
CL802812	2TX6m	2	6	3	444	314	2	6	
CL802813	3TX6m	3	6	4.5	486	343	2	8	
CL802814	5TX6m	5	6	7.5	616	383	2	10	
CL802815	10TX6m	10	6	12.5	700	392	4	10	

- The central lifting chain wheel is made of precision casting, with high-frequency quenching for durability; Special bearings are used at both ends, with a tight structure and flexible transmission;
- Alloy steel plate gears, spline gears, upper and lower hooks, and hook frames are forged with high-quality alloy steel, with high strength and toughness, not easy to break, and safe and reliable.

Hand Hoist



Item NO.	Size	Weight (kg)	RMB
CL802000	0.75TX1.5m		
CL802001	1TX1.5m	8.00	
CL802002	1.5TX1.5m	11.50	
CL802003	2TX1.5m	12.50	
CL802004	3TX1.5m	20.00	
CL802005	6TX1.5m	33.00	
CL802010	0.75TX3m	8.50	
CL802011	1TX3m	9.00	
CL802012	1.5TX3m	13.50	
CL802013	2TX3m	14.50	
CL802014	3TX3m	23.00	
CL802015	6TX3m		

- Meet GB/T 7334 standard manufacturing requirements
- Fully enclosed gear, optimized transmission design, gear and bearing body made of alloy steel structure, high bremsstrahlung, not easy to break; Sprocket adopts precision casting, high frequency quenching, durable, labor-saving wrench, high safety factor
- Used for lifting operations in mines, steel mills, construction sites, power plants, warehouses and docks
- Safety tips: It is strictly prohibited to use cable pull overload, and it is strictly prohibited to operate with power other than manpower



Chain Hoists



Item NO.	Size	Weight	RMB
CL801901	1TX3m	12.50	
CL801903	2TX3m	20.50	
CL801904	3TX3m	42.00	
CL801905	5TX3m		
CL801906	10TX3m	17.50	
CL801911	1TX6m	27.00	
CL801913	2TX6m	34.00	
CL801914	3TX6m	55.00	
CL801915	5TX6m		
CL801916	10TX6m		
CL801913	2TX6m		

- Meet GB/T 7334 standard manufacturing requirements
- The center sprocket adopts precision casting, high frequency quenching and durable;Both ends use special bearings, compact structure, flexible transmission; Alloy steel sheet gear, spline gear, upper and lower hook and hook frame are forged by high quality alloy steel, high bremsstrahlung, not easy to break;The sprocket adopts high quality chromium vanadium steel forging heat treatment, lifting operation is safe and reliable, spline shaft adopts patent technology, convenient disassembly and assembly
- Used for lifting operations in mines, steel mills, construction sites, factories, warehouses and wharves.
- Safety tips: It is strictly prohibited to use cable pull overload, and it is strictly prohibited to operate with power other than manpower

1/2" Series Air Impact Wrench



Item NO.	Size	Weight	Price	RMB
CL802101	Single exhaust	1/5	4.31	

- Equipped with: pneumatic electrophoresis sleeve 10, 11, 13, 14, 17, 19, 22, 24mm Pneumatic electrophoresis 5" rod double hammer structure, large power, light weight, front exhaust, 1/2" mortise: maximum torque 640n. m rotational speed 7500RPM gas consumption 11L/S, air inlet 1/4" Air pressure: 6-8KG/cm2 Total length 192mm, inner pipe diameter 9.5mm
- Suitable for assembly, disassembly and maintenance of cars and motorcycles

1/2" Series Air Impact Wrench



Item NO.	Size	Weight	Price	RMB
CL802102	Double exhaust	1/5	4.40	712.32

- Equipped with: pneumatic electrophoresis sleeve 10, 11, 13, 14, 17, 19, 22, 24mm Pneumatic electrophoresis 5" connecting rod double hammer structure, large power, light weight, double exhaust structure 1/2" square tenon: maximum torque 720N.m speed 8000RPM gas consumption 11L/S Air inlet 1/4" Air pressure: 6-8kg/cm2 Total length 192mm, inner pipe diameter 9.5mm
- Suitable for assembly, disassembly and maintenance of cars and motorcycles

1/2" Series Pneumatic Impact Wrench



Item NO.	Size	Weight	Price	RMB
CL802104	1100Nm.			

- All components are processed with precision machine tools for high-precision machining, with precise machining surface dimensions. High quality steel is selected for all impact structural components, and the intelligent control processing system strengthens the ultra long service life design, which is resistant to impact and wear.
- This pneumatic wrench has a delicate structure and an ergonomic appearance design, which makes the operator feel comfortable while working and greatly reduces operational fatigue.

1/2" Series Air Impact Wrench



Item NO.	Size	Icon	Weight (kg)	RMB
CL802103	1/2"		1.49	1500.00

- Double hammer structure, large power, light weight, lower exhaust structure 1/2" square tenon: maximum torque 745n. m/15sec, rotational speed 8000RPM, air consumption 129/MIN, air inlet 1/4", air pressure: 6.3kg/cm² /90Psi, total length 160mm, inner diameter φ9.5mm, product weight: 1.3kg
- Suitable for automobile maintenance, mechanical equipment, and motorcycle assembly, disassembly and maintenance

3/4" Impact Pneumatic Wrench



Item NO.	Size	Icon	Weight (kg)	RMB
CL802111	3/4"		6.80	1635.56

- Double hammer structure, large power and torque, light weight, lower exhaust structure 3/4" square tenon: maximum torque: 1400N.m/15sec; Speed: 4500RPM; Air consumption: 800L/min air inlet; 3/8" air pressure: 6~8kg/cm² /90Psi; Spindle length: 1.5"; Weight: 6.8kg
- Suitable for automobile maintenance, woodworking machinery and other industries and maintenance assembly, installation and disassembly

1" Impact Pneumatic Wrench



Item NO.	Size	Icon	Weight (kg)	RMB
CL802121	1"		20.80	

- Single hammer clutch without pin design, large torque, long service life, lightweight and durable, side exhaust structure 1" square tenon; Maximum torque 5200n.m /15sec; Speed: 2800RPM; Air inlet: 1/2"; Air pressure: 8-10kg/cm² Spindle length: 9"; Product weight: 19.9kg
- Suitable for automobile maintenance, mechanical equipment, and motorcycle assembly, disassembly and maintenance

Multifunctional Hydraulic Gear Puller



Item NO.	Size	Icon	Security load (T)	Axis effective distance (mm)	Maximum vertical distance (mm)	Transverse maximum outside diameter (mm)	RMB
CL608205	5T		2	5	50	140	200
CL608210	10T		2	10	50	160	250
CL608215	15T		2	15	50	200	350
CL608220	20T		2	20	75	200	350
CL608230	30T		1	30	80	250	400
CL608250	50T		1	50	80	350	500

- Pull grab is forged and pressed by chromium-vanadium steel, with integral heat treatment, high structural strength and wide range of use
- Used for disassembling bearing, pulley, flange and other workpiece of mechanical equipment
- Industrial manufacturing standard, strong drawing force and long life
- Oil tip: use (GB443-84) N15 mechanical oil in -5°C~45°C
- Used in -20°C~-5°C, using (GB442-64) synthetic spindle oil

Split Hydraulic Puller



This product should be equipped with manual pump

Item NO.	Size	Maximum travel	Number of claws	Range of spacing	Equipped with pumps	RMB
CL618805	5T	50mm	3	50-200	CP-180	
CL618810	10T	52mm	3	50-250	CP-180	
CL618820	20T	75mm	3	100-350	CP-700	
CL618830	30T	75mm	3	150-400	CP-700	
CL618850	50T	75mm	3	200-500	CP-700	

- 2/3 claws shared, can be removed according to work needs, suitable for different working environment.
- Split design, need to be used with manual hydraulic pump or electric hydraulic pump.
- The hook and hook frame are forged with high-strength alloy steel, which is not easy to deform.
- The hydraulic cylinder is made of solid steel with high safety factor.
- High strength sealing ring, long service life.



VDE
绝缘



3-jaw Gear Puller



Item NO.	Size	Weight	Pull(T)	Drawing diameter	Price	RMB
CL608403	3"	40	1.50	15-80mm	0.59	
CL608404	4"	20	3.00	20-100mm	1.07	
CL608406	6"	12	6.00	25-160	2.53	
CL608408	8"	4	8.80	30-210mm	5.12	
CL608410	10"	4	10.60	30-260mm	7.34	
CL608412	12"	2	13.10	50-310mm	10.83	

- The puller is forged by chromium vanadium steel, bremsstrahlung is good and the top drawing force is strong, and the whole heat treatment
- High structural strength, wide range of use
- Used for disassembling bearing, pulley, flange and other workpiece of mechanical equipment.
- Industrial manufacturing standard, strong drawing force and long life

2-jaw Heavy Duty Gear Puller



Item NO.	Size	Weight	Pull(T)	Drawing diameter	Price	RMB
CL608303	3"	40	0.80	15-80mm	0.46	
CL608304	4"	20	2.00	20-100mm	0.77	
CL608306	6"	12	4.00	25-160	1.67	
CL608308	8"	6	6.10	30-210mm	3.86	
CL608310	10"	4	7.40	30-260mm	4.92	
CL608312	12"	2	9.10	50-310mm	8.65	

- The puller is forged by chromium vanadium steel, bremsstrahlung is good and the top drawing force is strong, and the whole heat treatment
- High structural strength, wide range of use
- Used for disassembling bearing, pulley, flange and other workpiece of mechanical equipment
- Industrial manufacturing standard, strong drawing force and long life

T17 3-jaw Gear Puller



Item NO.	Size	Weight	Price	RMB
CL608423	3"	40	0.48	
CL608424	4"	20	0.95	
CL608425	5"	20	1.04	
CL608427	7"	6	2.86	
CL608429	9"	6	3.14	

- The puller is forged by chromium vanadium steel, bremsstrahlung is good and the top drawing force is strong, and the whole heat treatment
- Used for disassembling bearing, pulley, flange and other workpiece of mechanical equipment
- Industrial manufacturing standard, strong drawing force and long life

T18 Gear Puller



Item NO.	Size	Weight	Price	RMB
CL608523	3"	40	0.40	
CL608524	4"	20	0.73	
CL608525	5"	20	0.76	
CL608527	7"	6	1.04	
CL608529	9"	6	2.33	

- The puller is forged by chromium vanadium steel, bremsstrahlung is good and the top drawing force is strong, and the whole heat treatment
- Used for disassembling bearing, pulley, flange and other workpiece of mechanical equipment

T19 2-jaw Gear Puller



Item NO.	Size	Weight	Price	RMB
CL608323	3"	60	0.35	
CL608324	4"	24	0.69	
CL608327	7"	8		
CL608329	9"	8	2.24	

- The puller is forged by chromium vanadium steel, bremsstrahlung is good and the top drawing force is strong, and the whole heat treatment
- Used for disassembling bearing, pulley, flange and other workpiece of mechanical equipment
- Industrial manufacturing standard, strong drawing force and long life

Single Hook And Two Claw Puller



Item NO.	Size	Claw length	The screw rod's long	The bracket's long	Pull	Weight	Volume	RMB
CL608331	4"	100mm	130mm	110mm	1.5t	50		
CL608332	6"	140mm	160mm	160mm	3.0t	40		
CL608333	8"	160mm	190mm	200mm	4.0t	30		
CL608334	10"	210mm	235mm	285mm	6.0t	12		
CL608335	12"	230mm	285mm	315mm	7.0t	12		
CL608336	14"	285mm	330mm	360mm	9.0t	4		

- The puller is forged by chromium vanadium steel, bremsstrahlung is good and the top drawing force is strong, and the whole heat treatment
- Used for disassembling bearing, pulley, flange and other workpiece of mechanical equipment
- Industrial manufacturing standard, strong drawing force and long life

Belt Oil Filter Wrench



Item NO.	Size	Weight	Volume	RMB
CL704904	9"	10/60	0.33	
CL704905	11"	4/48	0.52	

- Aluminum alloy die cast rod body, strong and light
- Electrostatic spraying surface treatment, beautiful and durable
- Strong rubber belt, tensile resistance
- Used for fast disassembly of various vehicle oil filters

Chaining Oil Filter Wrench



Item NO.	Size	Weight	Volume	RMB
CL710016	16"	6/24	1.22	
CL710024	24"	1/12	1.77	

- The clamp handle is forged with high quality alloy steel and heat treated as a whole
- Assembly and disassembly of various filters used for rapid disassembly of various large buses, heavy trucks, bulldozers and other imported or domestic vehicles. At the same time, it is also suitable for the disassembly of all kinds of cylindrical objects, such as water pipes and other widely used

Filter Wrench with Aluminum Handle (Wire Belt)



Item NO.	Size	Weight	Volume	RMB
CL704901	12"	5/40	0.42	

- This product is suitable for the installation and disassembly of all kinds of automotive filters, and can be adjusted freely according to the size of filters; Easy to use, anti-slip, close bite, improve work efficiency;It is one of the indispensable tools for car repairmen

Chaining Oil Filter Wrench



Item NO.	Size	Weight	Volume	RMB
CL710009	9"	10/60	0.45	
CL710012	12"	10/20	0.89	

- The clamp handle is forged with high quality alloy steel and heat treated as a whole
- Assembly and disassembly of various filters used for rapid disassembly of various large buses, heavy trucks, bulldozers and other imported or domestic vehicles. At the same time, it is also suitable for the disassembly of all kinds of cylindrical objects, such as water pipes and other widely used

Filter Wrench with Aluminum Handle (Nylon Belt)



Item NO.	Size	Weight	Volume	RMB
CL704902	12"	5/40	0.35	

- This product is suitable for the installation and disassembly of all kinds of automotive filters, and can be adjusted freely according to the size of filters; Easy to use, anti-slip, close bite, improve work efficiency;It is one of the indispensable tools for car repairmen



Clamp type Oil Filter Wrench



Item NO.	Size			RMB
CL705701	12"	6/36		
CL705702	10"	6/48	0.34	

- High quality CR-V forged steel manufacturing, integral heat treatment, high strength and long life
- Toothed jaws holding force is not easy to slip, used for removing all kinds of filters that are difficult to remove
- Three gears can slide positioning to meet the clamping needs of filters of different sizes
- Pockmarked PVC handle, non-slip and comfortable to hold

Flat Foot Oil Filter Wrench



Item NO.	Size			RMB
CL705503	65-110mm	10/40	0.38	

- Chromium vanadium steel manufacturing, special heat treatment
- High-precision gear design, three-jaw two-way rotation uniform, flexible, high strength, no deformation
- Use with 1/2" square hole drive tool
- Chrome sandblasted surface treatment, beautiful and wear-resistant

Adjustable Oil Filter Wrench



Item NO.	Size			RMB
CL705001	95-115	6/48	0.46	
CL705002	75-95	6/48	0.37	
CL705003	55-75	6/48	0.33	

- The working end of four-section riveting structure has strong torsion after heat treatment.
- With sliding groove at the front of the handle, the working end can move freely, and the filters of various sizes can be grasped quickly to achieve rapid disassembly
- The inner side of the working end adopts the tooth pulling process to increase the locking force and prevent the filter from slipping during disassembly
- Aperture can be adjusted freely, easy to use

Round Foot Oil Filter Wrench



Item NO.	Size			RMB
CL705501	65-110mm	10/40	0.63	

- Chromium vanadium steel manufacturing, special heat treatment
- High-precision gear design, three-jaw two-way rotation uniform, flexible, high strength, no deformation
- Use with 1/2" square hole drive tool
- Chrome sandblasted surface treatment, beautiful and wear-resistant

Stainless steel adjustable filter wrench



Item NO.	Size			RMB
CL705012	75-95	6/60	0.35	
CL705013	55-75	6/60	0.32	

- Made of pure 304 stainless steel, with mirror surface treatment, coarse tooth design, durable
- Suitable for disassembly and assembly of all kinds of automobile filters

Oil Filter Wrench



Item NO.	Size			RMB
CL702730	70-76mm	12/48	0.30	

- Suitable for most small cars and trucks; Adopts 3/8" square hole drive

Oil Filter Wrench



Item NO.	Size			RMB
CL709144	16P/87	6/60	0.21	

- Made of high-quality alloy steel, stamping molding, strong and durable
- 1/2" square drive hole is made of chromium-vanadium steel for long service life
- Application: BMW, VOLVO
- Used for the installation and removal of vehicle filters

Oil Filter Wrench



Item NO.	Size			RMB
CL709141	6P/27	10/120	0.06	
CL709142	6P/32	10/120	0.06	
CL709143	6P/36	10/120	0.07	

Size	Applicable Vehicle type
6P/27	Mercedes:aclass
6P/32	VAUXHALL OPRL:ASTRA CORSA ZATIRA CADILLAC
6P/36	VAUXHALL/OPEL OMRGA DL 16V VECTRA FORD:MONDEO TRANSIT/ BMW AUDI/VW

- Made of high-quality alloy steel, stamping molding, strong and durable
- 1/2" square drive hole is made of chromium-vanadium steel for long service life
- Application: Please select the applicable oil grid for the vehicle type listed in the form
- Used for the installation and removal of vehicle filters

Adjustable Oil Filter Wrench



Item NO.	Size			RMB
CL702740	63-102mm	1/24		

- Suitable for most small cars and trucks;Adopts 3/8" square hole drive

Oil Filter Wrench



Item NO.	Size			RMB
CL709151	14P/64.5	6/60	0.19	
CL709144	16P/87	6/60		

- Made of high-quality alloy steel, stamping molding
- 1/2" square drive hole is made of chromium-vanadium steel for long service life
- Application: Toyota: 3.5L 2007 model
- Lexus: IS250 IS350 GS300 GS350 GS450HE S350 RX350 LS460 LS600h
- Used for the installation and removal of vehicle filters

Oil Filter Wrench(Mirror)



Item NO.	Size			RMB
CL709131	901	6/48	0.16	
CL709132	902	6/48	0.17	
CL709133	903	6/48		
CL709134	911-1	6/48		
CL709135	905	6/48		

- Made of high-quality alloy steel, stamping molding
- 1/2" square drive hole is made of chromium-vanadium steel for long service life
- Used for the installation and removal of vehicle filters

Oil Filter Wrench(Black)



Item NO.	Size			RMB
CL709111	901	9/72	0.14	
CL709112	902	9/72	0.17	
CL709113	903	9/72	0.18	

- High quality sheet metal stamping molding, high precision and long life
- 1/2" square drive hole is made of chromium-vanadium steel for long service life
- Used for the installation and removal of vehicle filters



Single Oil Filter Wrench



Item NO.	Size	🚗	📦	RMB
CL705214	76mm(14)	6/72		
CL705221	80-82mm(14)			

- Made of high-quality alloy steel, stamped and hardened by heat treatment
- 1/2" square drive hole is made of alloy steel
- Used for the installation and removal of vehicle filters

14pcs Oil Filter Wrench Set



Item NO.	Size	🚗	📦	RMB
CL709114	14PCS	5	3.85	

- It is made of alloy steel, stamped and hardened by heat treatment with chrome plated surface
- 1/2" square drive hole is made of chromium-vanadium steel for long service life
- Used for the installation and removal of vehicle filters

22pcs Oil Filter Wrench Set



Item NO.	Size	🚗	📦	RMB
CL709122	22PCS	4	5.86	

- It is made of alloy steel, stamped and hardened by heat treatment with chrome plated surface
- 1/2" square drive hole is made of chromium-vanadium steel for long service life
- Used for the installation and removal of vehicle filters

15pcs Oil Filter Wrench Set



Item NO.	Size	🚗	📦	RMB
CL704115	15PCS	5	2.58	

- Made of high-quality alloy steel, stamped and hardened by heat treatment
- 1/2" square drive hole is made of alloy steel
- Used for the installation and removal of vehicle filters

Chaining Oil Filter Wrench



Item NO.	Size	🚗	📦	RMB
CL705601	lengthen	40		
CL705602	standard	40	0.47	

- Chromium vanadium steel material, high hardness and wear resistance
- Used for fast disassembly of refractory oil filters for various vehicles
- This product should be paired with a long deer 1/2"L rod for easy use

12PCS Brake pump adjusting set



Item NO.	Size	🚗	📦	RMB
CL703812	12PCS	10	1.90	

- Made of high quality alloy steel, practical after heat treatment hardening
- Screw finishing to ensure smooth operation of medium thread
- Sets of products, blow plastic box packaging is easy to carry and daily management
- Used for top pressure operation of brake piston of various models, press back brake piston and adjust brake pump
- Brake sub-pump adjustment tool is a special tool for auto repair that should be provided by the garage

12PCS Disc bearing wheel puller set



Item NO.	Size			RMB
CL703912	12PCS	3	7.14	

- Made of high quality carbon steel, integrated heat treatment, blackening and rust prevention treatment
- Used for the disassembly of automobile transmission bearings, tire bearings, steering wheel bearings, etc
- Drawing range: 75-105

Volkswagen Audi 2.0 Timing Tool



Item NO.	Size			RMB
CL711502		10	1.52	

- Made of special alloy steel, hardened by heat treatment, blackened and rust-proof
- Used for Volkswagen and Audi crankshaft, camshaft, rotation position adjustment and maintenance

12PCS Double disc bearing puller set



Item NO.	Size			RMB
CL704212	12PCS	5	3.85	

- Made of high quality carbon steel, integrated heat treatment, blackening and rust prevention treatment
- Used for the disassembly of automobile transmission bearings, tire bearings, steering wheel bearings, etc
- Drawing range: 30-50 50-75

Ford timing tool



Item NO.	Size			RMB
CL711501	10		0.93	

- Made of special alloy steel, hardened by heat treatment, blackened and rust-proof
- Used for adjusting and maintaining the crankshaft, camshaft and rotating position of Ford motor engine

Valve spring compressor (valve clamp)



Item NO.	Size			RMB
CL702001	16-30mm	6	1.49	

- Made of high carbon steel, hardened by integral heat treatment
- Used for disassembly and assembly of vehicle valve spring, bow type structure to ensure coaxiality with valve

Brake pump adjusting set



Item NO.	Size			RMB
CL703818	18PCS	10	2.44	
CL703821	21PCS	5	2.63	

- Made of high quality alloy steel, practical after heat treatment hardening
- Screw finishing to ensure smooth operation of medium thread
- Sets of products, blow plastic box packaging is easy to carry and daily management
- Used for top pressure operation of brake piston of various models, press back brake piston and adjust brake pump
- Brake sub-pump adjustment tool is a special tool for auto repair that should be provided by the garage



Audi 3.0 Timing Tool



Item NO.	Size			RMB
CL711503		10	2.69	

- Made of special alloy steel, hardened by heat treatment, blackened and rust-proof
- Used for Volkswagen and Audi crankshaft, camshaft, rotation position adjustment and maintenance

Fuel Pressure System Testing Efi Components



Item NO.	Size			RMB
CL701101	YZR-70A	7	1.78	

- EFT fuel pressure test kit Safely tests the vehicle's fuel pressure system, quickly and easily finding any malfunctioning fuel system faults, including fuel filters
- Pressure regulator, fuel system, fuel pump, etc.
- test range :0~100Psi (LBS) 0~700kpa/ kpa
- Pure brass fittings, pressure relief valve for safer testing

3.0 Vw Audi Timing Tool



Item NO.	Size			RMB
CL711505		5	3.08	

- Made of special alloy steel, hardened by heat treatment, blackened and rust-proof
- Used for Volkswagen and Audi automobile crankshaft, camshaft, rotation position adjustment and maintenance
- Origin: Made in Taiwan

Valve oil seal set



Item NO.	Size			RMB
CL704011	11PCS	10	1.77	

- Made of alloy steel, the surface is treated with anti-rust chrome plating
- Used for the disassembly and assembly of automobile valve oil seal and valve spring

Power Steering Disassembly Tool



Item NO.	Size			RMB
CL711701		5	0.96	

- Made of high quality tool steel, hardened by heat treatment, blackened and rust-proof
- Used for disassembly and assembly of automotive power steering wheel and pulley, transmission wheel and direction booster pump


Oil Ejector Wrench Set



Item NO.	Size			RMB
CL703712	12PCS	20	1.07	

- Made of high quality chromium-vanadium steel, hardened by heat treatment and plated with chromium to prevent rust.
- Specifications: Hexagonal 3/8"-8mm-9mm-10mm-12mm-14mm-17mm Quadrangle 8mm(5/16")-3/8"-11mm-13mm slide rod 1
- Used for the removal and installation of oil bottom screws of various types of vehicles

33pcs Of 1/2" santana Special Tools



Item NO.	Size			RMB
CL102333	33PCS	4	3.25	

- Made of high quality chromium-vanadium steel, hardened by heat treatment and plated with chromium to prevent rust
- Used for bolt installation and disassembly of Santana automobile series

7pcs Metal Plate Hammer Set



Item NO.	Size			RMB
CL704307	7PCS	5		

- Hammer head adopts high carbon steel integral forging forming, which is not easy to break after quenching
- Miniature plane, more uniform force on percussion surface when used
- TPR plastic protective handle, comfortable and non-slip
- Used for shaping of industrial car body, automobile and mechanical sheet metal

Oxygen Sensor Socket



Item NO.	Size			RMB
CL708801	standard	12/72	0.23	
CL708802	lengthen	12/72	0.21	

- Made of high quality alloy steel, practical after heat treatment hardening
- Screw finishing to ensure smooth operation of medium thread
- Sets of products, blow plastic box packaging is easy to carry and daily management
- Used for top pressure operation of brake piston of various models, press back brake piston and adjust brake pump
- Brake sub-pump adjustment tool is a special tool for auto repair that should be provided by the garage

Face finishing sheet metal hammer



Item NO.	Size			RMB
CL704311		6/36		

- Hammer head high carbon steel is formed by integral forging, which is not easy to break after quenching treatment
- Miniature plane, making the percussion surface more uniform
- Special embedding process makes hammer close not easy to fall off
- TPR plastic protective handle, comfortable and non-slip

7 Pcs Oxygen Sensor Socket Set



Item NO.	Size			RMB
CL708803	7pcs	10	2.09	

- Forged, stamped and hardened by heat treatment with high quality vanadium plated steel
- Surface treated with manganese phosphate, excellent rust resistance, 1/2" square drive hole
- Used for automotive installation and removal of oxygen sensors

Crane mouth finishing sheet metal hammer



Item NO.	Size			RMB
CL704312		6/36		

- Hammer head high carbon steel is formed by integral forging, which is not easy to break after quenching treatment
- Miniature plane, making the percussion surface more uniform
- Special embedding process makes hammer close not easy to fall off
- TPR plastic protective handle, comfortable and non-slip



Light reduction sheet metal hammer



Item NO.	Size			RMB
CL704313		6/36		

- Hammer head high carbon steel is formed by integral forging, which is not easy to break after quenching treatment
- Miniature plane, making the percussion surface more uniform
- Special embedding process makes hammer close not easy to fall off
- TPR plastic protective handle, comfortable and non-slip

Pier type sheet metal lining



Item NO.	Size			RMB
CL704316		1/30		

- Integral forging of high carbon steel, resistant to percussion after quenching
- Mirror polishing

Spade Iron Sheet Metal Lining



Item NO.	Size			RMB
CL704314		1/30		

- Integral forging of high carbon steel, resistant to percussion after quenching
- Mirror polishing

Flat sheet metal lining



Item NO.	Size			RMB
CL704317		1/30		

- Integral forging of high carbon steel, resistant to percussion after quenching
- Mirror polishing

Curved sheet metal lining



Item NO.	Size			RMB
CL704315		1/30		

- Integral forging of high carbon steel, resistant to percussion after quenching
- Mirror polishing

T-type spanner for spark plug



Item NO.	Size			RMB
CL402716	16mm	2/48	0.25	
CL402719	19mm	2/48	0.28	
CL402721	21mm	2/48	0.29	

- Chrome vanadium steel with special heat treatment
- Non-slip plastic handle, more comfortable to use
- Suitable for fastening and disassembling spark plug sleeve

1/2 "Mirror 12pt Spark plug socket (For BMW)



Item NO.	Size	Weight	Volume	RMB
CL203614	14mm	20	0.06	

- Chrome vanadium steel, special heat treatment, excellent comprehensive mechanical properties
- Product surface three layers of electroplating - nickel nickel chromium
- Thin wall design, suitable for small space

Front shock absorber dismounting Socket



Item NO.	Size	Weight	Volume	RMB
CL701801	front	25/50	0.37	

- Chrome vanadium steel, special heat treatment, excellent comprehensive mechanical properties
- The surface of the product is chrome plated
- Overall heat treatment, high strength and long life
- Professional tools are used to disassemble and assemble front shock absorbers of vehicles

Spark Plug Socket



Item NO.	Size	Weight	Volume	RMB
CL203516	1/2" 16mm	20/200	0.09	
CL203521	1/2" 21mm	12/120	0.13	
CL203616	3/8" 16mm	20/200	0.09	
CL203621	3/8" 21mm	6/200	0.13	

- Chrome vanadium steel, special heat treatment, excellent comprehensive mechanical properties
- The surface of the product is chrome plated
- Built-in strong magnetic, can easily suck out the spark plug
- Thin wall design, suitable for small space


Rear shock absorber disassembly Socket



Item NO.	Size	Weight	Volume	RMB
CL701802	after	60	0.41	

- Chrome vanadium steel, special heat treatment, excellent comprehensive mechanical properties
- The surface of the product is chrome plated
- Overall heat treatment, high strength and long life
- Professional tools are used to disassemble and assemble front shock absorbers of vehicles


Spark Plug Socket(Magnetic)

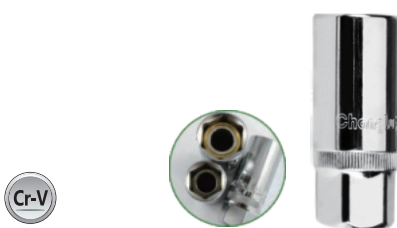

Item NO.	Size	Weight	Volume	RMB
CL205116	16mm	20	0.09	
CL205121	21mm	12	0.13	

- Chrome vanadium steel, special heat treatment, excellent comprehensive mechanical properties
- The surface of the product is chrome plated
- Built-in strong magnetic, can easily suck out the spark plug
- Thin wall design, suitable for small space

Shock absorber socket



Item NO.	Size	Weight	Volume	RMB
CL701902	B	3/126	0.05	

- Chrome vanadium steel, special heat treatment, excellent comprehensive mechanical properties.
- Product surface three layers of electroplating - nickel nickel chromium.
- Used to remove and install shock absorber top lock nut.



6pt socket for oil base screws



Item NO.	Size			RMB
CL701901	H17 (A)	3/80	0.12	

- Made of chrome-vanadium steel with mirror finish
- Special hex wrench for removing oil base screws

Special Socket Of The Screw End Of The Audi Oil



Item NO.	Size			RMB
CL701903	M16 (C)	2/80	0.12	
CL701904	M17 (C)	2/80	0.13	
CL701905	M18 (C)	2/80	0.14	

- Made of chrome-vanadium steel with mirror finish
- Used for removing and assembling audi oil base screws

Special Socket For Nissan Oil Bottom Screw



Item NO.	Size			RMB
CL701906		11/220		

- Made of chrome-vanadium steel with mirror finish
- Used for removing and assembling nissan oil base screws

Audi Maintenance Tools



Item NO.	Size			RMB
CL712903	21PCS	1		

- Made of advanced chromium-vanadium steel, high hardness, high torsion and wear resistance
- The whole set includes 20 special anti-theft sleeves and 1 long sleeve for 17mm
- A special tool for removing anti-theft screws, each sleeve has a corresponding code (the appearance of anti-theft screws is irregular, so the bolts can be removed only if the sleeve is coded in the same way)

Bmw Maintenance Tools



Item NO.	Size			RMB
CL712902	21PCS	1		

- Made of advanced chromium-vanadium steel, high hardness, high torsion and wear resistance
- The whole set includes 20 special anti-theft sleeves and 1 long sleeve for 17mm
- A special tool for removing anti-theft screws, each sleeve has a corresponding code (the appearance of anti-theft screws is irregular, so the bolts can be removed only if the sleeve is coded in the same way)

Porsche Maintenance Tools



Item NO.	Size			RMB
CL712901	20PCS	1		

- Made of advanced chromium-vanadium steel, high hardness, high torsion and wear resistance
- The whole set has 20 special anti-theft sleeves
- A special tool for removing anti-theft screws, each sleeve has a corresponding code (the appearance of anti-theft screws is irregular, so the bolts can be removed only if the sleeve is coded in the same way)

Engine cleaning gun



Item NO.	Size			RMB
CL700710	10"	6/36	0.31	

- Aluminum manufacturing structure, strong and durable
- Clean, decontaminate, clean and work with car engine and other subtle parts

Multifunctional Water Spray Gun



Item NO.	Size			RMB
CL700651		12/48		

The cleaning gun does not need any mechanical, oil or electric power. The joint at the end of the water gun is connected to the faucet through the independent principle to become a cleaning gun with pressure. It can be adjusted arbitrarily, or water column, or spray wine, or atomize, or direct. It is pressure-resistant, energy-saving and environmental friendly. It is used to wash various vehicles, wash walls, floors, clean air conditioners, and water flowers, trees and vegetables. It is convenient and practical, It is a powerful tool for your work. It can be used as a beautiful gift with the car.

J10 Engine cleaning gun



Item NO.	Size			RMB
CL700711	10"	6/36		

- Made of aluminum alloy, strong and durable structure
- Used for cleaning, decontamination, cleaning and work of automobile engine and other subtle parts

Aluminum Alloy Water Gun



Item NO.	Size			RMB
CL700652		12/48		

The cleaning gun does not need any mechanical, oil or electric power. The joint at the end of the water gun is connected to the faucet through the independent principle to become a cleaning gun with pressure. It can be adjusted arbitrarily, or water column, or spray wine, or atomize, or direct. It is pressure-resistant, energy-saving and environmental friendly. It is used to wash various vehicles, wash walls, floors, clean air conditioners, and water flowers, trees and vegetables. It is convenient and practical, It is a powerful tool for your work. It can be used as a beautiful gift with the car.

Advanced Cleaning Gun



Item NO.	Size			RMB
CL700601	Internal connection	25/50	0.42	
CL700602	External connection	25/50	0.42	

- The nozzle is made of pure copper without rust
- Used for cleaning, decontamination, cleaning, dust blowing, painting and other work

Drop Forged Coil Spring Compressor



Item NO.	Size			RMB
CL701401	Two claws	10	1.90	
CL701402	Four claws	10	3.19	

- Made of chromium-vanadium steel with blackened surface and hardened by heat treatment
- With 1/2" square drive hole, 2-claw / 4-claw design is practical and simple
- Used for spring tightening when repairing motor vehicles



Cylinder scraper knife



Item NO.	Size			RMB
CL712710	10"	16/160	0.15	

- Made of high quality chromium vanadium steel, hardened by heat treatment, blackened and rust-proof
- Double color injection molding, anti-slip and anti-oil handle design, comfortable to hold and durable
- It is mainly used to remove oil stains from cylinders and equipment, which is convenient to use

V Type For Teeth



Item NO.	Size			RMB
CL712817	10"	12/72	0.29	

- Made of high quality chromium-vanadium steel, hardened by heat treatment and plated with chromium to prevent rust
- Double color injection molding, anti-slip and anti-oil handle design, comfortable to hold and durable
- It is mainly used to remove oil stains from cylinders and equipment, which is convenient to use

Plastic rivet removal pliers(cotter pin pliers)



Item NO.	Size			RMB
CL710101		6/36		

- Made of alloy steel, high frequency hardening of clamp mouth, blackening and rust proof
- Special flat mouth design, safe pulling of rivets and open pin with high practicability
- Suitable for the extraction of plastic rivets for automobile body and industrial applications

Portable Car Pump (Single cylinder)



Item NO.	Size			RMB
CL706001	single-cylinder	8	2.89	

- Fast pumping speed, a completely flat tire can be filled in 5-7 minutes.
- When charging, the instrument pointer rises with the tire saturation degree. When the pointer reaches the appropriate tire pressure (generally car tire pressure is 2.3-2.6kg/cm), take out the plug and air nozzle, and the work is completed
- Used for fast tire inflation, with high brightness work lamp, easy to use.
- Warm tip: When using, please start the car engine to enhance the power and reduce the consumption of car battery power
- The machine can only use DC power supply (DC12V 10A), not household high-voltage power supply

Clip forceps



Item NO.	Size			RMB
CL710102	6/54		0.17	

- Created by high-grade chromium-vanadium steel and fired by high-frequency oil only to create black and prevent rust
- Anti-slip and anti-oil handle design, comfortable to hold and durable
- The return spring saves more energy, and the clamp mouth is sharp and not easy to cut off the buckle directly
- It is used for cutting operation which is not easy to disassemble buckle in automobile maintenance

Portable Car Air Pump(Double-cylinder)



Item NO.	Size			RMB
CL706002	Double cylinder	6	0.42	

- Fast air pumping speed of double cylinders, a completely flat tire can be filled in 3-5 minutes.
- When charging, the instrument pointer rises with the tire saturation degree. When the pointer reaches the appropriate tire pressure (generally car tire pressure is 2.3-2.6kg/cm), take out the plug and air nozzle, and the work is completed
- Used for fast tire inflation, with high brightness work lamp, easy to use.
- Warm tip: When using, please start the car engine to enhance the power and reduce the consumption of car battery power
- The machine can only use DC power supply (DC12V 10A), not household high-voltage power supply

Diesel Pump



Item NO.	Size			RMB
CL800911	24V	6	3.77	
CL800912	12V	6	3.99	

- Use voltage DC12V, rated power 200W, rated flow 40L, speed 3800r/min, suction range 5M, head 10-15m
- Use voltage DC24V, rated power 200W, rated flow 40L, speed 3500r/min, suction range 5M, head 10-15m
- Used for refueling and transportation of oil consuming equipment such as mining machinery, generator sets, fishing boats, vehicles and small refueling points, cast iron pump body, anti-corrosion coating, internal and external filter net, easy to clean, aluminum alloy mechanical and electrical, with the advantages of fast self-priming, high head, small volume, convenient to carry, etc

Tyre Inflator



Item NO.	Size			RMB
CL700707		6/48	0.43	

- It has the functions of deflating, inflating and measuring tires
- Use the built-in scale value to display the tire pressure, which is more stable than the general instrument inflating meter

Professional-grade Bicycle Pump



Item NO.	Size			RMB
CL707801		1/10	0.81	

- The product is reasonable in structure, novel in style, durable, reliable in quality, practical, lightweight and easy to carry. It is suitable for inflating cars, basketball, volleyball, football and other ball games and inflatable toys. Universal, compact design, solid structure

Tyre Inflator



Item NO.	Size			RMB
CL700703		10/50	0.53	

- Adopt precision oil pressure indicator display, more accurate for tire pressure detection
- With inflating and deflating valve control switch, thickening anti-shock rubber sleeve, anti-fall and anti-earthquake, and dust blowing function
- Used for inflating and deflating maintenance of automobile tires and air tires

Quick Inflator



Item NO.	Size			RMB
CL709701		1	10.58	

- It is made by welding the left and right sides of seamless tube, and the product has passed CE safety certification. It is used for quick inflating repair of tire with vacuum tire leakage caused by wheel hub deformation

T13 Digital Tyre Inflator



Item NO.	Size			RMB
CL700706	1/12		0.99	

- This product is reasonable in structure, novel in style, durable, reliable in quality, practical and lightweight. Easy to carry, suitable for cars, basketball, volleyball, football and other balls and inflatable toys. Universal, compact design, solid structure




Digital Tyre Inflator



Item NO.	Size			RMB
CL700704		10/50		

- Adopt precise arithmetic core chip, digital display indicates tire pressure
- With inflating and deflating valve control switch, thickening anti-shock rubber sleeve, anti-fall and anti-earthquake, and dust blowing function
- Used for inflating and deflating maintenance of automobile tires and air tires

Industrial Grade Balancing Pliers



Item NO.	Size			RMB
CL702402	9"	6/48	0.37	

- Forged with chromium-vanadium steel, integrated heat treatment, nickel chromium plating and rust prevention treatment
- Used for dynamic balancing, disassembling, cutting lead sheet of tire rims balance block and installation

Tyre Inflator B



Item NO.	Size			RMB
CL700702		10/50	0.43	

- Adopt precise pointer display to detect tire pressure accurately
- With inflatable and deflated valve control switch thickened anti-shock rubber cover, anti-fall and anti-earthquake and dust blowing function
- Used for inflating and deflating maintenance of automobile tires and air tires

Tyre Extend Tools



Item NO.	Size			RMB
CL710901	400mm	10	1.53	

- Made of high carbon alloy steel, with galvanized surface and anti-rust treatment
- With precision tooth groove and ratchet gear clamping function
- Expansion repair AIDS for tire repair

Wheel Repairing Needle



Item NO.	Size			RMB
CL704702	8PCS	6/72		

- The product is reasonable in structure, novel in style, durable, reliable in quality, practical, lightweight and easy to carry, suitable for cars, basketball, volleyball, football and other ball games and inflatable toys. This product is the use of cold repair rubber strip, tire rolling to complete vulcanization process and make repair rubber strip and tire firmly stick as one of the tire repair method. With the characteristics of fast, convenient, reliable and safe, it has become a universal choice of portable tire repair products with versatility, compact design and strong structure

Labor Saving Wrench



Item NO.	Size			RMB
CL704401	1:58	4	7.43	

- Made of advanced alloy steel, integrated heat treatment, manganese phosphate rust proof
- The internal mechanism adopts planetary gear type, small torque conversion and large torque output is a good tool for the safety of disassembly of large equipment screw explosion-proof shock
- Used for the installation and quick removal of tire nuts of large vehicles


Labor Saving Wrench



Item NO.	Size			RMB
CL704403	1:78	3	6.17	

- Made of high quality carbon steel, integrated heat treatment, blackening and rust prevention treatment
- Used for the disassembly of automobile transmission bearings, tire bearings, steering wheel bearings, etc
- Use alone with rama
- Sets of products, blow plastic box packaging is easy to carry and daily management.

Magnetic Bar



Item NO.	Size			RMB
CL702206	1KG	50/200		

- Super magnetic force, can absorb up to 1kg of metal objects
- Plastic handle and bendable rod are used for convenient bending space picking up
- Used to pick up metal objects left behind in a small space in shaanxi that are difficult to reach by hand

Spark Plug Pliers



Item NO.	Size			RMB
CL708701		6/36	0.29	

- Made of high quality carbon steel, head with plastic sleeve, effective clamping to ensure no slip, handle with spring design, labor saving, long time operation without fatigue
- Two-color environmentally friendly non-slip handle, comfortable and ergonomic, comfortable and labor-saving
- Used to remove spark plug in high temperature and remove

Magnetic Bar



Item NO.	Size			RMB
CL702205	2KG	25/100		

- Super magnetic force, can absorb up to 2kg of metal objects
- Plastic handle and bendable pole are adopted to facilitate the picking up of bending space
- Used to pick up metal objects left behind in a small space in shaanxi that are difficult to reach by hand

Flexible Magnetic Bar



Item NO.	Size			RMB
CL710301	3.5LB	25/100	0.05	
CL710302	1.5LB	50/300	0.03	

- Super magnetic force, can absorb metal objects
- Pen telescopic rod, easy to carry
- Used to pick up metal objects left behind in a small space in shaanxi that are difficult to reach by hand

Magnetic Bar



Item NO.	Size			RMB
CL702207	8LB	25/50		

- Super magnetic force, can absorb up to 8LB of metal objects
- Plastic handle and bendable pole are adopted to facilitate the picking up of bending space
- Used to pick up metal objects left behind in a small space in shaanxi that are difficult to reach by hand



Magnetic Bar with lamp



Item NO.	Size			RMB
CL702208	8LB	25/50		

- Super magnetic force, can absorb up to 8LB of metal objects
- Plastic handle and bendable pole are adopted to facilitate the picking up of bending space
- Used to pick up metal objects left behind in a small space in shaanxi that are difficult to reach by hand

Armature Bearing Puller



Item NO.	Size			RMB
CL701301	12-38mm	20	1.16	

- Made of chromium-vanadium steel, hardened by integral heat treatment
- Screw thread precision machining, strong solid practical drawing
- Drawing range for bore bearings: 12~38mm

Telescopic View Mirror



Item NO.	Size			RMB
CL710311	30mm	100	0.04	
CL710312	50mm		0.08	

- High quality mirror material made of reinforced glass, metal telescopic handle
- 360° to universal mirror, mirror diameter 32mm
- Used for dim space and corner or container inspection where eyes are not easily discernible

3pcs brake spring repair set



Item NO.	Size			RMB
CL702736	3PCS	12/24	0.60	

- Made of high quality alloy steel, the surface is galvanized to prevent rust
- Used to remove and install the return spring on the brake (return spring hook in place)
- Suitable for most domestic and imported vehicles

Bearing puller



Item NO.	Size			RMB
CL701701	AB-1	12/48	0.34	
CL701702	AB-2	6/36	0.75	
CL701703	AB-3	6/12	1.71	

- Made of special steel forging, integral heat treatment
- Screw thread is precisely machined, and the top drawing is strong, solid and practical
- Used for drawing and disassembling of external bearing of precision machinery or automobile

Engine Stethoscope



Item NO.	Size			RMB
CL702708		6/36		

- The diagnostic tube is made of stainless steel, which can quickly and accurately determine abnormal sound problems of the engine and driving parts. It is composed of super sensitive plastic ball diaphragm of earphone and two sensing probes
- Used for engine abnormal sound diagnosis, through which parts and components can be determined

Piston Ring Compressor



Item NO.	Size	🚗	📦	RMB
CL705801	3"	50		
CL705802	4"	50		
CL705803	6"	32		75.45

- Steel belt made of high strength spring steel, after precision heat treatment, equipped with ratchet locking device
- 3-inch piston ring compressor: expansion range 53mm-175mm Piston ring height: 76mm
- 4-inch piston ring compressor: expansion range 53mm-175mm Piston ring height: 100mm
- 6 inch piston ring compressor: expansion range 53mm-175mm Piston ring height: 150mm
- For reference only, subject to actual size.
- A snap tool for removing pistons from automobile engines

8pcs Seal Ring Set Of Drawing And Screws



Item NO.	Size	🚗	📦	RMB
CL702703	8PCS	12/48	0.26	

- Used for installation and disassembly of nuts, shrapnel, springs, pins and washers in oil seals and O-rings

Elbow Hose Clamps



Item NO.	Size	🚗	📦	RMB
CL702728	bend	6/36PCS	0.31	

- Made of high-carbon alloy steel, labor-saving design, high-end practical
- Black, galvanized treatment, anti-rust, plastic coated with 2-color design
- Used to replace fuel hoses and water hoses with bevel Angle and flat Angle pliers

4pcs Seal Ring Set And Screws



Item NO.	Size	🚗	📦	RMB
CL702704	4PCS	10/100	0.13	

- Made of high gold steel, oil proof handle, chrome plated surface
- Remove or install oil seals, O-rings, nuts, shrapnel, springs, inserts, washers

Flat Hose Clamps



Item NO.	Size	🚗	📦	RMB
CL702729	straight	6/36PCS	0.32	

- Made of high carbon alloy steel with PVC sheath for handle
- Special ratchet lock for easy repair of radiator and tank hoses
- And disassembly; Swivel joints are suitable for tight Spaces
- Mainly used for the disassembly of vehicle line hose and gas pipe buckle

Tubing pliers with two-color handle



Item NO.	Size	🚗	📦	RMB
CL712601		6/42	0.33	

- Made of high-quality alloy steel, two-color handle, beautiful and durable
- Thickening design of clamp mouth can effectively prevent damage of clamp head
- Mainly used for the disassembly of vehicle oil pipeline joint



4 Pcs Crowbar Set



Item NO.	Size	🚗	📏	RMB
CL702786	4PCS	6/12	1.02	

- Forged by high quality alloy steel and heat treated as a whole
- Suitable for automobiles, factories, agricultural products, families, industry, etc

Nut Splitter



Item NO.	Size	🚗	📏	RMB
CL708001	5/8"-7/8"	12/48	0.43	
CL708002	1/2"-5/8"	12/30	0.20	

- Made of chromium-vanadium steel, threaded screw with fine tooth design, overall heat treatment
- Used to remove the damage and shear damage of various tightened or rusted nuts

6pcs pry bar set



Item NO.	Size	🚗	📏	RMB
CL702757	6PCS	6/12	1.19	

- Made of high alloy steel, thermoplastic rubber handle, quenched
- Used for rapid panel separation and removal of various fasteners

European ball head extractor



Item NO.	Size	🚗	📏	RMB
CL701501	European style	24	1.42	

- Made of chromium vanadium steel, integrated heat treatment, high strength and good accuracy
- High strength bolts extend the service life of products
- Used for ejecting the valve ball of the vehicle engine

Fork Type Crowbar



Item NO.	Size	🚗	📏	RMB
CL708125	250mm	30	0.73	
CL708130	300mm	30	0.99	

- Forged from high quality chromium vanadium steel, sandblasted chrome plated surface treatment
- Overall heat treatment, high strength and long service life, adding temper process at the tail
- High toughness and percussive characteristics
- Used for separating automobile ball head from steering knuckle and stripping tires

Japanese ball head extractor



Item NO.	Size	🚗	📏	RMB
CL701601	Japanese Style	20	1.17	

- Made of chromium vanadium steel, integrated heat treatment, high strength and good accuracy
- High strength bolts extend the service life of the product, and the surface is treated with chrome anti-rust
- Used for ejecting the valve ball of the vehicle engine

Bolt Extractor



Item NO.	Size			RMB
CL703301		40		

- It is made of high carbon steel, with integral heat treatment and chromium plating on the surface to prevent rust
- Suitable for stud diameter of 5~19mm, take out bolt counterclockwise
- Can be used to tighten or loosen: offset raised stud

Double Seal Ring Pull



Item NO.	Size			RMB
CL702737	300mm	6/36	0.33	

- Made of high alloy steel, the handle PP injection is comfortable and non-slip
- Double hook head, thickened handle body, easy disassembly of two specifications
- Tools for drawing and disassembly of automobile oil seals

Pull rod ball end extractor



Item NO.	Size			RMB
CL707902	Small	50	0.50	

- Forged with high quality chromium vanadium steel, integral heat treatment, high strength and long life
- High strength bolts extend the service life of the product, and the surface is sandblasted and chrome plated, beautiful and corrosion resistant
- Used for removing bar ball heads of most cars and light trucks

Two Sets Of Crochet



Item NO.	Size			RMB
CL708302	2PCS	24/144		

- The hook is made of special steel, hardened by heat treatment, and the handle has a rubber sleeve to prevent slip
- Used to pull the car O-ring, gasket, split pin, etc

Belt removal tool



Item NO.	Size			RMB
CL702784	650mm	6/12	0.22	

- Non-slip handle design, double hook adopts alloy steel heat treatment hardening, blackening and rust prevention
- Used to place double crochet needles, remove and install serpentine belt v-belt, synchronous belt, etc

Outside The Box High-grade Car Test Pencil



Item NO.	Size			RMB
CL501503	6V-24V	6/60	0.16	

- Made of high voltage resistant insulating material, telescopic spring wire
- With probe protective sleeve, crocodile chuck, test range of 6~12V~24V
- With standby neon lamp and LED light tube, no heat is generated when working
- Designed for detecting the fault of transportation machinery and low voltage circuit
- Used for maintenance of large vehicles, automobiles, motorcycles, bulldozers, rollers and other transport machinery



Top Grade Electric Test Pencil



Item NO.	Size			RMB
CL501403	6V-24V	12/120	0.06	

- Made of high voltage resistant insulating material, telescopic spring wire
- With probe protective sleeve, crocodile chuck, test range of 6~12V~24V
- With standby neon lamp and LED light tube, no heat is generated when working
- Designed for detecting the fault of transportation machinery and low voltage circuit
- Used for maintenance of large vehicles, automobiles, motorcycles, bulldozers, rollers and other transport machinery

Emergency Car Battery Line



Item NO.	Size			RMB
CL711401	400A	10	1.36	

- High quality copper wire, outer diameter 10mm, wire diameter 0.35x100 strands
- Red wire is connected to (+) level, black wire is connected to (-) level
- Used for vehicles with displacement below 3.0

Electric Circuit Test Pencil



Item NO.	Size			RMB
CL501502	6V-24V	25/100	0.12	

- Made of high voltage resistant insulation material, the spring sheath protects the measuring wire
- With probe, crocodile chuck, test range of 6~12V~24V
- Used for measurement of large vehicles, automobiles, motorcycles, bulldozers, rollers, etc

Cylinder head handle



Item NO.	Size			RMB
CL710201		6/72	0.11	

- For grinding cylinder heads
- Synthetic plastic grinding head, can prevent chemical invasion

Electric Circuit Test Pencil



Item NO.	Size			RMB
CL501501	6V-24V	20/240	0.04	

- Made of pure copper, telescopic spring line, with probe protection head
- Crocodile collet, test range of 6~12V~24V low voltage circuit detection
- Used for maintenance of large vehicles, automobiles, motorcycles, bulldozers, rollers and other transport machinery


Repairing Remover



Item NO.	Size			RMB
CL702306	6"	8/72	0.46	

- Chrome-vanadium steel manufacturing, integrated heat treatment, chromium plating on the surface of rust prevention
- Used for disassembly and assembly of car ornaments and nails, dual-color handle design

Big Crowbar

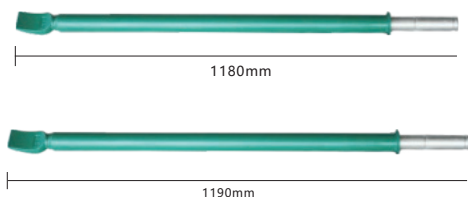

Item NO.	Size			RMB
CL709401	large	4	12.55	
CL709402	Small	5	10.31	

- Forged with 35 manganese steel and hardened by fine forging
- Used for the disassembly and installation of large car wheel ring tires

Large vacuum tire removal tool



Item NO.	Size			RMB
CL710401	3PCS	4	10.74	

- Forged with 35 manganese steel and hardened by fine forging
- Used for the removal and installation of vacuum tires for large vehicles

Repair the car lying board



Item NO.	Size			RMB
CL709201	1010X475X115mm	1	6.08	

- The lying plate adopts the new polyethylene (PE) blow molding, bremsstrahlung strong, light weight, arc streamline design is more comfortable to use, not easy to aging in high temperature and cold areas
- Six universal wheels are set at the bottom for more convenient movement
- It is used for convenient maintenance of vehicle maintenance chassis, reducing the hard work of maintenance personnel

Lifting machine



Item NO.	Size			RMB
CL708902	3500kg	1		

- Lifting weight: 3500kg lifting height: 2130mm
- Platform length: 1540~1740mm Platform width: 550mm
- Rise time: less than 50s; Minimum height of the 50s: 330mm
- Motor power: 2.2KW Motor voltage: 220/380V
- Operating pressure: 6~8kg/cm² Packaging size: 1530x630x500mm
- Hydraulic oil: No. 32 wear-resistant hydraulic oil
- Suitable for automobile 4S shop, garage, chassis or tire repair lifting.
- Tibetan structure design, level with the ground, small space
- Square tube arm, safe and reliable mechanical locking when rising, pneumatic unlocking.
- Supporting shear arm, thickened supporting shear arm design, to ensure stable and safe quality lifting ability.
- Extended platform with pull-out type and height limit switch to ensure safety
- Overall horizontal base, easy to install, horizontal adjustable screws, and pass 115% dynamic load test 150% static load test.

Double Column Lifter



Item NO.	Size			RMB
CL708901	3.5T	1		

- 1, electric hydraulic power system and double hydraulic cylinder chain drive.
 - 2, bilateral manual unlocking device, easy to operate.
 - 3, spiral rubber tray, vehicle positioning collision free.
 - 4, column eight bending, sliding table fixed seat bending molding.
 5. Pass 115% dynamic load test and 150% static load test.
- Lifting weight: 4500kg lifting height: 1820mm
 Height: 2860mm width: 3410mm
 Rise time: less than 50s lowest height: 95mm
 Motor power: 2.2KW Motor voltage: 220/380V
 Package size: 2960x465x735mm
 Suitable for automobile 4S shop, garage, chassis or tire repair lifting.



VDE
绝缘



ELECTRIC TOOLS



Electric Hand Drill



Holding range of drill chuck: 0.8~10mm
No Load Speed: 3300r/min
Rated Input Power: 450W
Rated Voltage: 220V~
Rated Frequency: 50Hz



Item NO.	Size	Weight	Volume	RMB
ET0101	450W	10	1.36	

- Suitable for: household, decoration, maintenance or carpentry
- Meet the REQUIREMENTS of 3C certification, safe and reliable double insulation operation, thick rotor teeth, more durable gear
- Steering gear and carbon brush, imported materials, long life and more durable
- Ergonomic body design, comfortable to use

Lithium Electric Drill



Idle speed: 0-400/1500r/min
Torque setting: 18+1
Maximum torque: 30N · m
maximum clamping capacity: 10mm
Weight: 0.9kg

Item NO.	Size	Weight	Volume	RMB
ET0504	12V	10		

- 10mm high-quality chuck extends the service life of the chuck
- 18+1 gear torque adjustment maximum torque: 30N · m
- 18cm compact body design, lightweight and portable
- The power display function is convenient, allowing you to check the remaining power at any time
- Smart chip system is safe and durable

Electric Hand Drill



Holding range of drill chuck: 0.8~10mm
No Load Speed: 1100r/min
Rated Input Power: 710W
Rated Voltage: 220V~
Rated Frequency: 50Hz



Item NO.	Size	Weight	Volume	RMB
ET0102	710W	10	1.85	

- Suitable for: household, decoration, maintenance or carpentry
- Meet the REQUIREMENTS of 3C certification, safe and reliable double insulation operation, thick rotor teeth, more durable gear
- Steering gear and carbon brush, imported materials, long life and more durable
- Ergonomic body design, comfortable to use

Lithium Electric Drill



Clamping range of drill chuck: 0.8-10mm
Idle speed: 0-700rpm
Lithium battery capacity: 1200mAh
Rated voltage of lithium battery: DC12V-
Maximum torque: 20N M

Item NO.	Size	Weight	Volume	RMB
ET0501	12V	10	0.97	

- Suitable for: household and decoration, 12V strong pure copper wire brushless motor
- 1500mAh maximum capacity for greater durability
- Industrial grade lithium batteries have a lifespan of up to 400 cycles

Electric Hand Drill



Holding range of drill chuck: 3~16mm
No Load Speed: 950r/min
Rated Input Power: 1200W
Rated Voltage: 220V~
Rated Frequency: 50Hz



Item NO.	Size	Weight	Volume	RMB
ET0103	1200W	5	3.86	

- Suitable for: household, decoration, maintenance or carpentry
- Meet the REQUIREMENTS of 3C certification, safe and reliable double insulation operation, thick rotor teeth, more durable gear
- Steering gear and carbon brush, imported materials, long life and more durable
- Ergonomic body design, comfortable to use

Lithium Electric Drill



Clamping range of drill chuck: 10mm
Idle speed: 0~1550rpm
Lithium battery capacity: 1800mAh
Rated voltage of lithium battery: 21V
Maximum torque: 35N M

Item NO.	Size	Weight	Volume	RMB
ET0503	21V	10		

- Suitable for: household, decorative, 21V strong pure copper wire brushless motor
- 1800 mah maximum capacity is more durable



Rechargeable Lithium Wrench



Lithium battery capacity: 4000mAh
Rated voltage of lithium battery: DC20V~
Impact frequency: 0-3000bpm
Idle speed: 0-2300r/min
Maximum torque: 300N. m
Product weight: 3.2Kg

Item NO.	Size	🔧	🔋	RMB
ET0511	20V	6	3.20	

- Suitable for: rack pipe disassembly, assembly, auto repair
- High horsepower, high energy and powerful pure copper wire brushless motor
- 300N strong torque, low noise and durable
- Large-capacity lithium technology • Fast charging and lasting power
- Reverse mode, free switching • One-button design, easy conversion

Angle Grinder



Grinding wheel installation diameter: 100mm
Idle speed: 12000 r/min
Rated power: 720W
Rated input voltage: AC220V~
Rated frequency: 50Hz

Item NO.	Size	🔧	🔋	RMB
ET0205	720W	1/10		

- Applicable to: household, decoration, maintenance, small factories
- Manufacturing of pure copper wire motors for greater durability and longer lifespan
- High quality casing material, high strength, more durable

Rechargeable Lithium Wrench



Rated voltage: 21VDC
Rated speed: 1700/2100/2400RPM
Rated impulse frequency: 2300/2700/3000BPM
Rated shaft size: 12.5mm (1/2 ")
Torque: 1st gear 300N. m/2nd gear 450N. m
3rd gear 850N. m/reverse 900N M

Item NO.	Size	🔧	🔋	RMB
ET0512	900N.m	1/4		

- 1/2 square shaft, high torque, maximum output of 900N. m
- Intelligent 3-speed adjustment control board to meet different working conditions
- 4.5Ah 15 cell battery pack with large capacity to provide continuous power supply

Brushless Lithium Angle Grinder



Idle speed: 8500r/min
Spindle thread: M10
Grinding wheel diameter: 100mm
Grinding wheel aperture: 16mm

Item NO.	Size	🔧	🔋	RMB
ET0532	21V	1/6		

- Adopting high-power, low loss, brushless strong magnetic copper motor, no need to replace carbon brushes, strong power.
- Alloy steel gears, refined by firing, wear-resistant.
- Intelligent three speed regulation, controllable speed, suitable for different cutting operations.
- Large capacity lithium battery, fast charging, and long-lasting battery life.
- The body is designed with ergonomics, suitable for one handed grip and smooth operation.

Lithium Electric Angle Grinder



Grinding wheel installation diameter: 100mm
Idle speed: 11000r/min
Rated power: 850W
Rated input voltage: AC220V~
Rated frequency: 50Hz

Item NO.	Size	🔧	🔋	RMB
ET0204	850W	10		

- Applicable to: household, decoration, maintenance, small factories
- Manufacturing of pure copper wire motors for greater durability and longer lifespan
- High quality casing material, high strength, more durable

Lithium Electric Angle Grinder



Idle speed: 10000r/min
Spindle thread: M10
Grinding wheel diameter: Φ 100mm
Maximum cutting depth: 21mm

Item NO.	Size	🔧	🔋	RMB
ET0531	20V	10		

- Adopting high-power, low loss, brushless strong magnetic copper motor, no need to replace carbon brushes, strong power.
- Alloy steel gears, refined by firing, wear-resistant.
- Intelligent three speed regulation, controllable speed, suitable for different cutting operations.
- Large capacity lithium battery, fast charging, and long-lasting battery life.
- The body is designed with ergonomics, suitable for one handed grip and smooth operation.

Polishing Machine



Installation diameter of polishing disc: 180mm
Idle speed: 600-2700r/min
Rated power: 1100W
Rated input voltage: AC220V~
Rated frequency: 50Hz
Power cord length: 5M

Item NO.	Size			RMB
ET0701	1100W	6	3.6	

- Auto maintenance, polishing, woodworking polishing
- Personalized auxiliary handle design, smooth operation, comfortable experience
- 1100W rated output power, lightweight body, strong power
- Soft adhesive handle, comfortable to hold, prevent fatigue, suitable for long time work
- Super long power cord, more convenient to use

Electric Circular Saw



Saw blade installation diameter: 235mm
Idle speed: 4000r/min
Rated power: 2200W
Rated input voltage: AC220V~
Rated frequency: 50Hz

Item NO.	Size			RMB
ET0802	9"	4		

- Adopt double tight gear, no jitter occurs when the saw blades are connected
- Full copper wire high temperature resistant motor, strong and durable
- Oblique cutting, 0~45° cutting Angle or oblique cutting to meet the use
- Power switch with locking function, easy to use for a long time
- Professional saw cutting with hole in the bottom of circular saw to protect operator safety

Marble Cutter



Saw blade installation diameter: 110mm
Idle speed: 13000r/min
Rated power: 1450W
Rated input voltage: AC220V~
Rated frequency: 50Hz

Item NO.	Size			RMB
ET0401	1450W	6	3.03	

- Suitable for: professional, decoration, carpentry, small factories
- The base plate can be adjusted to 45 degrees, which can be used in a wide range
- Super power pure copper wire motor, stronger load capacity, better cutting effect
- Good balance of saw blade, cutting tiles without breaking edge
- Suitable for tile, wood, stone and wall cutting with large workload

Cut-off Machine



Saw blade installation diameter: 355mm
Idle speed: 3800r/min
Rated power: 2800W
Rated input voltage: AC220V~
Rated frequency: 50Hz

Item NO.	Size			RMB
ET0901	355mm	1	13.5	

- Limit screw, more accurate cutting
- Quick locking movable buckle design
- Foldable design for easy storage
- Ergonomic handle, anti-slip and shockproof
- Heat dissipation channel, not hot for a long time
- Grinding wheel protective cover to prevent accidents

Electric Circular Saw



Saw blade installation diameter: 185mm
Idle speed: 5300r/min
Rated power: 1300W
Rated input voltage: AC220V~
Rated frequency: 50Hz

Item NO.	Size			RMB
ET0801	7"	6		

- Adopt double tight gear, no jitter occurs when the saw blades are connected
- Full copper wire high temperature resistant motor, strong and durable
- Oblique cutting, 0~45° cutting Angle or oblique cutting to meet the use
- Power switch with locking function, easy to use for a long time
- Professional saw cutting with hole in the bottom of circular saw to protect operator safety

Belt Sawing Machine



Saw blade installation diameter: 255mm
Idle speed: 6000r/min
Rated power: 1400W
Rated input voltage: AC220V~
Rated frequency: 50Hz

Item NO.	Size			RMB
ET0902	255mm	1	9.6	784.00

- High precision dial 45-90 ° Angle positioning
- Humanized design can be folded for storage, saving space
- Handle adopts safety switch for safer operation
- Automatic shrinkage of double protective cover, dust protection
- Belt transmission is quieter overload skidding
- Dust cover design to prevent dust splashing



VDE
绝缘



Demolition Hammer

Maximum diameter of drill bit: 28mm
Rated power: 1150W
Rated input voltage: AC220V~
Rated frequency: 50Hz
Number of blows per minute: 4800
Idle speed: 1050r/min



Item NO.	Size	🚚	📦	RMB
ET0304	1150W	4		

- Suitable for: household, professional, construction, decoration, factory or small batch crushing
- Pure copper wire motor, precision bearing to ensure strong running performance of products, new ABS blades Durable, high wear resistance
- High strength alloy gear, secondary high temperature quenching, high strength gear, long service life
- Position card head, made of high strength steel, durable, accurate position, no turning

Demolition Hammer

Rated power: 2200W
Rated input voltage: AC220V~
Rated frequency: 50Hz
Hammer strikes per minute: 3880
Hammer force: 15J
Total product quantity: 6.06Kg



Item NO.	Size	🚚	📦	RMB
ET0305	2200W	3	6.06	

- Suitable for: household, decoration, small batch crushing
- Pure copper wire motor, precision bearing to ensure strong running performance of products, new ABS blades Durable, high wear resistance, cylinder diameter size 30mm
- High strength alloy gear, secondary high temperature quenching, high strength gear, long service life
- Position card head, made of high strength steel, durable, accurate position, no turning

Demolition Hammer

Rated power: 2500W
Rated input voltage: AC220V~
Rated frequency: 50Hz
Hammer strikes per minute: 1600
Hammer force: 48J



Item NO.	Size	🚚	📦	RMB
ET0303	2500W	1	14.25	

- Suitable for: professional, construction, decoration, maintenance, factory or batch crushing
- Pure copper wire motor, precision bearing to ensure strong running performance of products, new ABS blades Durable, high wear resistance, cylinder diameter size 45mm
- High strength alloy gear, secondary high temperature quenching, high strength gear, long service life
- Position card head, made of high strength steel, durable, accurate position, no turning

Lithium Electric Threading Machine



Item NO.	Size	🚚	📦	RMB
ET0521		1		

- High quality 10000mah lithium battery, steel wire plastic coated lead, with spring lead head Can wear 90° line tube
- Strong pulling force, automatic stop when pulling back to the original position, low dry sound in operation, fast threading speed Save time and energy and high efficiency
- Used for wiring and threading of indoor and outdoor water, electricity and pipes of buildings

Brushless Lithium Grease Gun(zipper)

Rated voltage: 18v
Maximum pressure: 10000psi/69MP
Maximum oil output: 130g/min
Lubricating oil capacity: 400cc



Item NO.	Size	🚚	📦	RMB
ET1001	400cc	6		

- Equipped with an LCD display screen, it can set a circulating quantitative oil output to easily meet work needs and reduce grease waste.
- Adopting a brushless pure copper motor, it operates stably, is not easy to burn, has strong power, provides strong pressure, and efficiently and quickly delivers oil.
- One click lock switch to prevent accidental touch when not in use, safe and worry free. Large capacity lithium battery provides long-lasting endurance.

Brushless Lithium Grease Gun(pull rod type)

Rated voltage: 18v
Maximum pressure: 10000psi/69MP
Maximum oil output: 130g/min
Lubricating oil capacity: 500cc



Item NO.	Size	🚚	📦	RMB
ET1002	500cc	6		



- Equipped with an LCD display screen, it can set a circulating quantitative oil output to easily meet work needs and reduce grease waste.
- Adopting a brushless pure copper motor, it operates stably, is not easy to burn, has strong power, provides strong pressure, and efficiently and quickly delivers oil.
- One click lock switch to prevent accidental touch when not in use, safe and worry free. Large capacity lithium battery provides long-lasting endurance.

Inverse Dc Welder



Item NO.	Size			RMB
ET0615	ZX7-400G	6	2.6	

- Adopt mature and stable two-module IGBT inverter technology, the failure rate is very low
- 24 hours non-stop welding ϕ 4.0/ ϕ 5.0 welding rod, suitable for large factories, steel structures, ships Application for trade
- Industrial grade products, welding wire can be extended to 200 meters for normal use
- Automatic compensation of voltage fluctuation, strong resistance to power grid fluctuation, stable welding current;
- Automatic over-voltage and over-current protection function;
- Good thrust compensation, good dynamic characteristics, small spatter, high efficiency, beautiful welding molding;
- Output high-power DC through pulse width modulation technology (PWM), stable performance,
- Continuous adjustable current, easy to use; Suitable for all kinds of acid alkaline electrode welding.

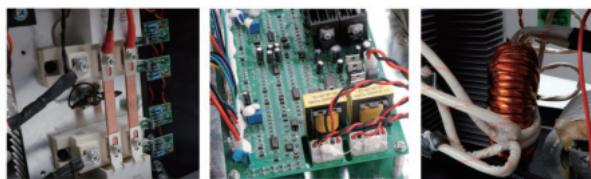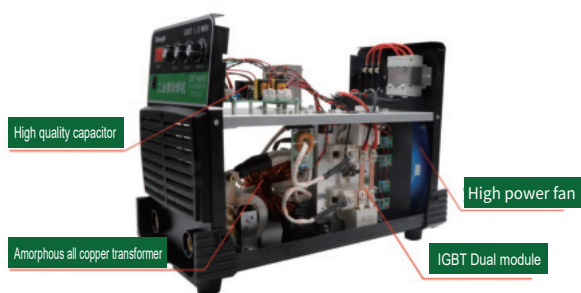

Inverse Dc Welder



Item NO.	Size			RMB
ET0601	ARC-300	6	2.6	

Size	ARC-300	Rated output voltage (V)	32
Item No.	ET0601	Thrust Current Adjustment (A)	
Supply input voltage(V)	AC220 $\pm$ 15	Load duration (%)	35
Input frequency (Hz)	50-60	Efficiency(%)	80
Rated input current (A)	17.2	Electrode diameter range	ϕ 0.8 ~ 3.2mm
No-load voltage (A)	65	Insulation grade	F
Output current regulation (A)	30-300	Enclosure protection class	IP21
Control panel	Single board computer (four IGBT single tubes)	Boundary dimension	238X100X150mm
Capacitor configuration of control board (PCS)	4	Weight	2.6Kg

- Suitable for household use, general maintenance, overhead operation and small factories
- It has the ability of automatic compensation for voltage fluctuation, strong resistance to power grid fluctuation and stable welding current
- With automatic protection function of overvoltage and overcurrent
- Good dynamic characteristics, small spatter, high efficiency, beautiful welding arc forming
- Output high-power DC through pulse width modulation technology (PWM), stable performance, small volume
- Light weight, high efficiency and energy saving, welding efficiency more than 30% higher than the traditional welding machine
- Continuous adjustable current, easy to use, suitable for all kinds of acid or alkaline electrode welding

Inverse Dc Welder



Item NO.	Size			RMB
ET0602	ZX7-200T	1	3.63	

model	ZX7-200T	Rated output voltage (V)	28
Article No	ET0602	Thrust current regulation (a)	
Power input voltage (V)	AC220 $\pm$ 15	Load sustaining force (%)	35
Input frequency (Hz)	50-60	Efficiency (%)	80
Rated input current (a)	10.6	Electrode diameter range	ϕ 0.8 ~ 2.5mm
No load voltage (a)	65	Insulation class	F
Output current regulation (a)	20-200	Enclosure protection grade	IP21
Control panel	Single board computer (2 IGBT single tubes)	Overall dimension (length x width x height)	300X125X260mm
Control board capacitance configuration (PCS)	2	Product weight	3.63Kg

- Suitable for household and general maintenance
- It has the ability of automatic compensation for voltage fluctuation, strong resistance to power grid fluctuation and stable welding current
- With automatic protection function of overvoltage and overcurrent
- Good dynamic characteristics, small spatter, high efficiency, beautiful welding arc forming
- Output high-power DC through pulse width modulation technology (PWM), stable performance, small volume Light weight, high efficiency and energy saving, welding efficiency more than 30% higher than the traditional welding machine
- Continuous adjustable current, easy to use, suitable for all kinds of acid or alkaline electrode welding



Inverse Dc Welder



Item NO.	Size	Weight	Volume	RMB
ET0603	ZX7-250S	1	5	

model	ZX7-250S	ated output voltage (V)	30
Article No	ET0603	Thrust current regulation (a)	
Power input voltage (V)	AC160-500	Load sustaining force (%)	35
Input frequency (Hz)	50-60	Efficiency (%)	80
Rated input current (a)	14.2	Electrode diameter range	Ø0.8 ~ 3.2mm
No load voltage (a)	65	Insulation class	F
Output current regulation (a)	20-250	Enclosure protection grade	IP21
Control panel	5 yuan (four IGBT single tubes)	Overall dimension (length x width x height)	375X158X310mm
Control board capacitance configuration (PCS)	4	Product weight	5Kg

- Suitable for household and general maintenance
- It has the ability of automatic compensation for voltage fluctuation, strong resistance to power grid fluctuation and stable welding current
- With automatic protection function of overvoltage and overcurrent
- Good dynamic characteristics, small spatter, high efficiency, beautiful welding arc forming
- Output high-power DC through pulse width modulation technology (PWM), stable performance, small volume Light weight, high efficiency and energy saving, welding efficiency more than 30% higher than the traditional welding machine
- Continuous adjustable current, easy to use, suitable for all kinds of acid or alkaline electrode welding

Inverse Dc Welder



Item NO.	Size	Weight	Volume	RMB
ET0605	ZX7-400D	1	10.53	

model	ZX7-400D	ated output voltage (V)	36
Article No	ET0605	Thrust current regulation (a)	0-100
Power input voltage (V)	AC3-380±15	Load sustaining force (%)	35
Input frequency (Hz)	50-60	Efficiency (%)	85
Rated input current (a)	27.2	Electrode diameter range	Ø0.8 ~ 4.0mm
No load voltage (a)	70	Insulation class	F
Output current regulation (a)	30-400	Enclosure protection grade	IP21
Control panel	5 yuan (four IGBT single tubes)	Overall dimension (length x width x height)	455X225X405mm
Control board capacitance configuration (PCS)	4	Product weight	10.53Kg

- Suitable for household and general maintenance
- It has the ability of automatic compensation for voltage fluctuation, strong resistance to power grid fluctuation and stable welding current
- With automatic protection function of overvoltage and overcurrent
- Good dynamic characteristics, small spatter, high efficiency, beautiful welding arc forming
- Output high-power DC through pulse width modulation technology (PWM), stable performance, small volume Light weight, high efficiency and energy saving, welding efficiency more than 30% higher than the traditional welding machine
- Continuous adjustable current, easy to use, suitable for all kinds of acid or alkaline electrode welding

Inverse Dc Welder



Item NO.	Size	Weight	Volume	RMB
ET0604	ZX7-315S	1	7.9	

model	ZX7-315S	ated output voltage (V)	32.6
Article No	ET0604	Thrust current regulation (a)	0-100
Power input voltage (V)	AC160-500	Load sustaining force (%)	35
Input frequency (Hz)	50-60	Efficiency (%)	80
Rated input current (a)	22	Electrode diameter range	Ø0.8 ~ 3.2mm
No load voltage (a)	65	Insulation class	F
Output current regulation (a)	30-315	Enclosure protection grade	IP21
Control panel	5 yuan (four IGBT single tubes)	Overall dimension (length x width x height)	415X208X385mm
Control board capacitance configuration (PCS)	6	Product weight	7.9Kg

- Suitable for household and general maintenance
- It has the ability of automatic compensation for voltage fluctuation, strong resistance to power grid fluctuation and stable welding current
- With automatic protection function of overvoltage and overcurrent
- Good dynamic characteristics, small spatter, high efficiency, beautiful welding arc forming
- Output high-power DC through pulse width modulation technology (PWM), stable performance, small volume Light weight, high efficiency and energy saving, welding efficiency more than 30% higher than the traditional welding machine
- Continuous adjustable current, easy to use, suitable for all kinds of acid or alkaline electrode welding

Inverse Dc Welder



Item NO.	Size	Weight	Volume	RMB
ET0606	ZX7-500D	1	17.86	

model	ZX7-500D	ated output voltage (V)	40
Article No	ET0606	Thrust current regulation (a)	0-100
Power input voltage (V)	AC3-380±15	Load sustaining force (%)	35
Input frequency (Hz)	50-60	Efficiency (%)	85
Rated input current (a)	37.8	Electrode diameter range	Ø0.8 ~ 5.0mm
No load voltage (a)	75	Insulation class	F
Output current regulation (a)	30-500	Enclosure protection grade	IP21
Control panel	5 yuan (2 IGBT modules)	Overall dimension (length x width x height)	510X250X405mm
Control board capacitance configuration (PCS)	4	Product weight	17.86Kg

- Suitable for household and general maintenance
- It has the ability of automatic compensation for voltage fluctuation, strong resistance to power grid fluctuation and stable welding current
- With automatic protection function of overvoltage and overcurrent
- Good dynamic characteristics, small spatter, high efficiency, beautiful welding arc forming
- Output high-power DC through pulse width modulation technology (PWM), stable performance, small volume Light weight, high efficiency and energy saving, welding efficiency more than 30% higher than the traditional welding machine
- Continuous adjustable current, easy to use, suitable for all kinds of acid or alkaline electrode welding

Intelligent inverter gas shielded welding machine



Item NO.	Size	🔌	📦	RMB
ET0631	NBC-270	1		

model	NBC-270	Welding wire disc diameter (mm)	270
Article number	ET0631	Welding wire diameter (mm)	0.8/1.0/1.2
Power supply voltage (V)	AC220/380±15	Load duration rate (%)	60
Frequency (Hz)	50-60	Efficiency (%)	93
Rated input capacity (KVA)	6.6	Insulation level	F
No load voltage (V)	65	Shell protection level	IP21
Output current regulation (A)	0-250	Using plate thickness (mm)	0.8 以上
Wire feeder form	分体	External dimensions	448X234X408
Wire feeding speed (m/min)	2.5-24	Weight (KG)	16.4

- Characteristics and applications of gas shielded welding: This welding machine has the characteristics of stable welding arc, small spatter, small deformation, and beautiful weld formation.
- Especially suitable for continuous welding and gap spot welding of thin, medium, and medium thick plates, its performance is reliable and stable.
- Features and uses of manual welding: The current is continuously adjustable, making it easy to use; Beautiful welding shape, suitable for various acidic and alkaline welding rods

Intelligent inverter gas shielded welding machine



Item NO.	Size	🔌	📦	RMB
ET0633	NBC-500	1		

model	NBC-500	Welding wire disc diameter (mm)	270
Article number	ET0633	Welding wire diameter (mm)	1.0/1.2/1.6
Power supply voltage (V)	AC3-380±15	Load duration rate (%)	60
Frequency (Hz)	50-60	Efficiency (%)	93
Rated input capacity (KVA)	25.6	Insulation level	F
No load voltage (V)	72	Shell protection level	IP21
Output current regulation (A)	50-500	Using plate thickness (mm)	0.8 以上
Wire feeder form	分体	External dimensions	635X327X636
Wire feeding speed (m/min)	2.5-24	Weight (KG)	44

- Characteristics and applications of gas shielded welding: This welding machine has the characteristics of stable welding arc, small spatter, small deformation, and beautiful weld formation.
- Especially suitable for continuous welding and gap spot welding of thin, medium, and medium thick plates, its performance is reliable and stable.
- Features and uses of manual welding: The current is continuously adjustable, making it easy to use; Beautiful welding shape, suitable for various acidic and alkaline welding rods

Intelligent inverter gas shielded welding machine



Item NO.	Size	🔌	📦	RMB
ET0632	NBC-350	1		

model	NBC-350	Welding wire disc diameter (mm)	270
Article number	ET0632	Welding wire diameter (mm)	0.8/1.0/1.2
Power supply voltage (V)	AC3-380±15	Load duration rate (%)	60
Frequency (Hz)	50-60	Efficiency (%)	93
Rated input capacity (KVA)	14	Insulation level	F
No load voltage (V)	72	Shell protection level	IP21
Output current regulation (A)	50-350	Using plate thickness (mm)	0.8 以上
Wire feeder form	分体	External dimensions	572X328X600
Wire feeding speed (m/min)	2.5-24	Weight (KG)	38.5

- Characteristics and applications of gas shielded welding: This welding machine has the characteristics of stable welding arc, small spatter, small deformation, and beautiful weld formation.
- Especially suitable for continuous welding and gap spot welding of thin, medium, and medium thick plates, its performance is reliable and stable.
- Features and uses of manual welding: The current is continuously adjustable, making it easy to use; Beautiful welding shape, suitable for various acidic and alkaline welding rods

Mini inverter DC welding machine



Item NO.	Size	🔌	📦	RMB
ET0621	250S	1		

Product Name	mini	Output current regulation (A)	0-250
model	250S	Welding rod diameter (mm)	0.8-3.2
Article number	ET0621	Load duration rate (%)	60
Power supply voltage (V)	AC220/380±15	Efficiency (%)	90
Frequency (Hz)	50-60	Insulation level	F
Rated input capacity (KVA)	11.5	External dimensions	290X155X230
No load voltage (V)	65	Weight (KG)	4.6

- Has the ability to automatically compensate for voltage fluctuations, strong resistance to grid fluctuations, and stable welding current;
- Equipped with automatic protection function for overvoltage and overcurrent;
- Good thrust compensation, low splashing, high efficiency, and beautiful welding forming;
- By using pulse width modulation (PWM) technology to output high-power DC, the performance is stable,
- Small size, light weight, efficient and energy-saving, with an efficiency improvement of over 30% compared to traditional welding machines.



Mini inverter DC welding machine



Item NO.	Size			RMB
ET0622	315S	1		
Product Name	mini	Output current regulation (A)	0-315	
model	315S	Welding rod diameter (mm)	0.8-3.2	
Article number	ET0622	Load duration rate (%)	60	
Power supply voltage (V)	AC220/380±15	Efficiency (%)	90	
Frequency (Hz)	50-60	Insulation level	F	
Rated input capacity (KVA)	11.5	External dimensions	290X155X230	
No load voltage (V)	65	Weight (KG)	5.3	

- Has the ability to automatically compensate for voltage fluctuations, strong resistance to grid fluctuations, and stable welding current;
- Equipped with automatic protection function for overvoltage and overcurrent;
- Good thrust compensation, low splashing, high efficiency, and beautiful welding forming;
- By using pulse width modulation (PWM) technology to output high-power DC, the performance is stable,
- Small size, light weight, efficient and energy-saving, with an efficiency improvement of over 30% compared to traditional welding machines.

Mini inverter DC welding machine



Item NO.	Size			RMB
ET0623	400D	1		
Product Name	mini	Output current regulation (A)	20-400	
model	400D	Welding rod diameter (mm)	0.8-4.0	
Article number	ET0623	Load duration rate (%)	60	
Power supply voltage (V)	AC3-380±15	Efficiency (%)	90	
Frequency (Hz)	50-60	Insulation level	F	
Rated input capacity (KVA)	16	External dimensions	290X155X230	
No load voltage (V)	65	Weight (KG)	5.5	

- Has the ability to automatically compensate for voltage fluctuations, strong resistance to grid fluctuations, and stable welding current;
- Equipped with automatic protection function for overvoltage and overcurrent;
- Good thrust compensation, low splashing, high efficiency, and beautiful welding forming;
- By using pulse width modulation (PWM) technology to output high-power DC, the performance is stable,
- Small size, light weight, efficient and energy-saving, with an efficiency improvement of over 30% compared to traditional welding machines.

Piston Type Air Compressor



Item NO.	Size			RMB
CL802611	0.25/8	1	90	

- Three-phase 380V power supply, three cylinders, low power, low fuel consumption 1/4 of the national standard
- High quality imported bearings, air valve parts imported from Sweden, intelligent overload phase protection
- Operating voltage: 220V, power: 2.2KW, exhaust volume: 0.25m³/min, Speed: 1140RPM, gas storage fou capacity: 70L, dimensions: 105x42x80cm, Net weight: 90 kg
- Suitable for car washing industry, factory spray operation, pneumatic wrench and assembly equipment application air source

Piston Type Air Compressor



Item NO.	Size			RMB
CL802612	0.9/12.5	1	210	

- Three-phase 380V power supply, three cylinders with high pressure, low power, low fuel consumption 1/4 of the national standard
- High quality imported bearings, air valve parts imported from Sweden, intelligent overload phase protection
- Operating voltage: 380V, power: 7.5KW, exhaust volume: 0.9m³/min, Speed: 920RPM, fou capacity: 180L, dimensions: 155x54x100cm, Net weight: 210 kg
- Suitable for car washing industry, factory spray operation, pneumatic wrench and assembly equipment application air source

Piston Type Air Compressor



Item NO.	Size			RMB
CL802613	1.05/16	1	300	

- Three-phase 380V power supply, four cylinders with cooling pipe, low powerLow fuel consumption 1/4 of the national standard
- High quality imported bearings, air valve parts imported from Sweden, intelligent overload phase protection
- Operating voltage: 380V, power: 7.5KW, exhaust volume: 1.05m³/min, Speed: 760RPM, gas storage fou capacity: 290L, dimensions: 160x58x120cm, Net weight: 300 kg
- Suitable for car washing industry, factory spray operation, pneumatic wrench and assembly equipment application air source

Piston Type Air Compressor



Item NO.	Size	🚗	📦	RMB
CL802601	0.25/8	1	90	

- Single-phase 220V power supply, double cylinders, low power, low fuel consumption 1/4 of the national standard
- High quality imported bearings, air valve parts imported from Sweden, intelligent overload phase protection
- Operating voltage: 220V, power: 2.2KW, exhaust volume: 0.25m³/min, Speed: 980RPM, capacity: 70L, size: 105x42x80cm, Net weight: 90 kg
- Suitable for car washing industry, factory spray operation, pneumatic wrench and assembly equipment application air source

Permanent Magnet Variable Frequency Screw Machine



Item NO.	power(Kw)	Exhaust pressure(mpa)	Exhaust volume(m ³ /min)	Start method	Outlet diameter
CL802624	7.5	0.8	1.1	frequency conversion	DN15

- High configuration, high efficiency and stability, shock absorption design, low noise
- Equipped with permanent magnet variable frequency screw compressor, stable working pressure, energy saving and high efficiency
- All stainless steel connections, beautiful atmosphere, avoid oil leakage and aging during the use of hoses
- Sliding door structure design, simple and generous, make maintenance more convenient

Piston Type Air Compressor



Item NO.	Size	🚗	📦	RMB
CL802602	0.9/8	1		

- Three-phase 380V power supply, three cylinders, low power, low fuel consumption 1/4 of the national standard
- High quality imported bearings, air valve parts imported from Sweden, intelligent overload phase protection
- Operating voltage: 380V, power: 7.5KW, exhaust volume: 0.9m³/min, Speed: 920RPM, fou capacity: 180L, dimensions: 155x54x100cm, Net weight: 200 kg
- Suitable for car washing industry, factory spray operation, pneumatic wrench and assembly equipment application air source

Permanent Magnet Variable Frequency Screw Machine



Item NO.	power(Kw)	Exhaust pressure(mpa)	Exhaust volume(m ³ /min)	Start method	Outlet diameter
CL802623	7.5	0.8	1.1	frequency conversion	DN15

- High configuration, high efficiency and stability, shock absorption design, low noise
- Equipped with permanent magnet variable frequency screw compressor, stable working pressure, energy saving and high efficiency
- All stainless steel connections, beautiful atmosphere, avoid oil leakage and aging during the use of hoses
- Sliding door structure design, simple and generous, make maintenance more convenient

Piston Type Air Compressor



Item NO.	Size	🚗	📦	RMB
CL802603	1.05/12.5	1	300	

- Three-phase 380V power supply, four cylinders with intercooler, low power Low fuel consumption 1/4 of the national standard
- High quality imported bearings, air valve parts imported from Sweden, intelligent overload phase protection
- Operating voltage: 380V, power: 7.5KW, exhaust volume: 1.05m³/min, Speed: 760RPM, gas storage fou capacity: 290L, dimensions: 160x58x120cm, Net weight: 300 kg
- Suitable for car washing industry, factory spray operation, pneumatic wrench and assembly equipment application air source

Permanent Magnet Variable Frequency Screw Machine



Item NO.	power(Kw)	Exhaust pressure(mpa)	Exhaust volume(m ³ /min)	Start method	Outlet diameter
CL802622	7.5	0.7/0.8/1.0/1.2	1.2/1.1/0.95/0.8	frequency conversion	DN15

- High configuration, high efficiency and stability, shock absorption design, low noise
- Equipped with permanent magnet variable frequency screw compressor, stable working pressure, energy saving and high efficiency
- All stainless steel connections, beautiful atmosphere, avoid oil leakage and aging during the use of hoses
- Sliding door structure design, simple and generous, make maintenance more convenient



TOOLS BOX



Iron Tool Box



Item NO.	Size	Shape size			RMB
CL704601	monolayer	360X165X130mm	12		

- The lid and box are tightly combined, firm and durable, with movable handle
- Fine sand paint surface, scratch resistant, dissolve resistant and rust resistant

Tool Box



Item NO.	Size	Shape size			RMB
CL710601	14 "	350X160X160mm	8		
CL710602	17 "	400X180X190mm	6		
CL710603	19 "	450X230X195mm	6		

- The box body is made of 0.8mm cold drawn steel plate and new high strength PP plastic, resistant to impact
- Handle adopts ABS engineering plastic, which is strong and durable
- Two parts boxes are designed above the box body to facilitate the storage of small parts

Iron Tool Box



Item NO.	Size	Shape size			RMB
CL704602	double layers	500X200X180mm	6		

- The lid and box are tightly combined, firm and durable, with movable handle
- Fine sand paint surface, scratch resistant, dissolve resistant and rust resistant
- High-grade 2-storey design, the upper layer is for spare parts and the lower layer is for heavy tools

Plastic Tool Box



Item NO.	Size	Shape size			RMB
CL710501	14 "	380X180X150mm	12		
CL710502	17 "	400X200X200mm	9		
CL710503	19 "	450X250X230mm	6		

- Manufactured with new high strength PP plastics
- Impact resistance, handle adopts new ABS engineering plastic, strong and durable
- Two parts boxes are designed above the box body to facilitate the storage of small parts

Iron Tool Box



Item NO.	Size	Shape size			RMB
CL704603	three layers	520X202X230mm	4		

- The lid is tightly combined with the box body, which is firm and durable, and the enhanced handle has stronger bearing capacity
- Fine sand paint surface, scratch resistant, dissolve resistant and rust resistant
- 3-layer folding design, easy to classify the placement of tools

Stainless steel Tool Box



Item NO.	Size			RMB
CL710611	14 "	8	1.08	
CL710612	17 "	6	1.41	
CL710613	19 "	6	1.74	

- The box body is made of stainless steel and new high strength PP plastic
- Impact resistance, handle adopts new ABS engineering plastic, strong and durable



Combined pull rod tool box



Item NO.	Size			RMB
CL704612	three layers	1		

- Comply with QB/T 3006 standard
- Specification: 520X320X720mm
- The first layer is toolbox, size: 440X230mm
- The second layer is drawer, size: 390X215X65mm
- The third layer is a flip bucket drawer, size: 410X280mm
- Hand-pulled luggage design, can also be separated and used alone
- Designed for carrying maintenance tools or instruments

Three Layer Tool Car



Item NO.	Size			RMB
CL704608	three layers	1		


- Comply with QB/T 3006 standard
- Round steel handle, comfortable feel
- The product structure design is firm and beautiful, and the surface is specially treated to adapt to complex working environment
- It is made of cold rolled steel plate with excellent material
- Universal wheel with brake, easy to turn, advance and retreat, strong bearing capacity, can withstand the impact of uneven site

Seven-layer Tool Car



Item NO.	Size			RMB
CL713017	Four-layer tool car	1		

- 7 Pumping tool car, double deck structure, castor fixed plate 1.2mm bearing capacity can reach 450Kg
- The thickness of the drawer panel is 0.8mm, and the aluminum alloy handle of the extra-wide drawer
- 4 casters, size 32X5", 2 directional casters and 2 universal casters (1 caster with brake)
- Drawer size and bearing capacity:
- 5- Small suction: 533(L)*391(W)*58(D)mm, bearing capacity of 25KG
- 1- Medium draw: 533(L)*391(W)*128(D)mm, carrying capacity 35KG
- 1- Large draw: 533(L)*391(W)*195(D)mm, carrying capacity of 35KG

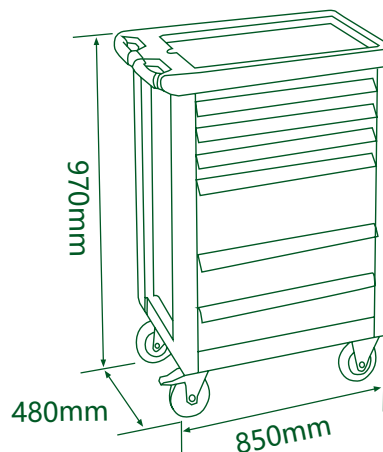

- Dual combination of central control lock and automatic drawer locking, high safety factor.
- Industrial grade double track slide, drawer can be pulled out 100%, stable and durable.
- Heavy-duty TTE brake wheels for wear resistance and low noise.
- The thickness of steel plate is 0.8-1.2mm, with large bearing capacity and durability.

Six-layer Tool Car



Item NO.	Size			RMB
CL713006	Six-layer tool car	1		

- 6 Pumping tool car, double deck structure, castor fixed plate 1.2mm bearing capacity can reach 450Kg
 - The thickness of the drawer panel is 0.8mm, and the aluminum alloy handle of the extra-wide drawer
 - 4 casters, size 32X5", 2 directional casters and 2 universal casters (with brakes)
- Drawer size and bearing capacity:
- 3- Small suction: 533(L)*391(W)*58(D)mm, bearing capacity of 25KG
 - 2-Medium draw: 533(L)*391(W)*128(D)mm, carrying capacity 35KG
 - 1- Large draw: 533(L)*391(W)*195(D)mm, carrying capacity of 35KG

81pcs Tool Holder



Item NO.	Size			RMB
CL106801	81PCS			

- 20pcs 1/2 "mirror 6PT Socket 8, 9, 10, 11, 12, 13, 14, 15,16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32mm
- 9pcs 1/2 "mirror E-type Socket E10, E11, E12, E14, E16, E18,E20, E22, E24mm
- 12pcs 1/2 "mirror lengthened 6PT metric Socket metric 10, 12, 13, 14, 15, 16,17, 18, 19, 21, 22, 24mm
- 4pcs 1/2 "star batch Socket T30, T40, T45, T50, M6, M8, M10, M12
- 4pcs of 1/2 "color Socket 17, 19, 21, 22mm
- 1pcs 1/2 "Mirror bent bar 10"
- 14pcs of star batch T40, T45, T50, T55, HW8, HW10, HW, HW14,PH3, PH4, FD8, FD10, PZ3, PZ4
- 3pcs 1/2 "mirror extension bar 3", 5", 10"
- 1pc three-purpose sliding head (Cr-V)3/8 "to 1/2"
- 2pcs 1/2 "spark plug Socket 16, 21mm
- 1pc 1/2 "mirror quick off ratchet wrench
- 1pc 1/2 "series mirror universal connection
- 1pc 1/2 "mirror clasp
- 1pc 6PT Socket H17 for oil base screws
- 1pc Audi special socket M17 for oil bottom screws
- 1pc Adapter 1/2 "to 3/8"
- 1pc shock absorber socket

Four-layer Tool Car



Item NO.	Size			RMB
CL713004	Seven-layer tool car	1		

- 4 pumping single door tool car, double deck structure, castor fixed plate 1.2mm bearing capacity can reach 450Kg
 - The thickness of the drawer panel is 0.8mm, and the aluminum alloy handle of the extra-wide drawer
 - 4 casters, size 32X5", 2 directional casters and 2 universal casters (1 caster with brake)
- Drawer size and bearing capacity:
- 3- Small suction: 533(L)*391(W)*58(D)mm, bearing capacity of 25KG
 - 1-Medium draw: 533(L)*391(W)*128(D)mm, carrying capacity 35KG

30pcs Tool Holder



Item NO.	Size			RMB
CL106803	30PCS			

- 17pcs of carbon steel mirror combination wrench 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24mm
- 8pcs of carbon steel mirror ring wrench 6*7, 8*10, 9*11, 12*14, 13*15, 16*18, 17*19, 22*24
- 4pcs mirror tubing wrench 8x10, 10x12, 13x14, 15x17
- 1pc carbon steel adjustable wrench 12"



VDE
绝缘





169pcs Tool Holder



Item NO.	Size			RMB
CL106802	169PCS			

- 18pcs 3/8 "mirror 6pt socket 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22mm
- 15pcs 3/8 "mirror lengthened 6pt socket 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22mm
- 9pcs 3/8 "Six flower star batch socket T20X48mm, T25X48mm, T27X48mm, T30X48mm, T40X48mm, T50X48mm, T55X48mm, T60X48mm
- 6pcs 3/8 " 6pt star batch socket HW4X48mm, HW5X48mm, HW6X48mm, HW7X48mm, HW8X48mm, HW10X48mm
- 2pcs 3/8 "Slotted star batch socket FD5.5X48mm FD6.5X48mm
- 3pcs of 3/8 "cross star batch socket PH1X48mm, PH2X48mm, PH3X48mm
- 7pcs 3/8 "mirror E-type socket 10, 11, 12, 14, 16, 18, 20mm
- 3pcs 3/8 "mirror extension bar 3" 6" 10"
- 1pc three-purpose sliding head 1/2" to 3/8"
- 1pc 3/8 "mirror universal connection
- 2pcs 3/8 "spark plug socket 16, 21mm
- 2pcs adapter 1/4 "to 3/8", 3/8" to 1/2"
- 1pc 3/8XH10 mirror clasp
- 1pc 3/8 "Quickly remove the ratchet wrench
- 13pcs 1/4 "mirror 6pt socket 4, 4.5, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- 11pcs 1/4 "mirror lengthened 6pt socket 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- 5pcs 1/4 "Six flower star batch socket T8X37mm, T10X37mm, T15X37mm, T20X37mm, T25X37mm
- 6pcs of 1/4 "6pt star batch socket HW3X37mm, HW4X37mm, HW5X37mm, HW6X37mm, HW7X37mm, HW8X37mm
- 3pcs 1/4 "Slotted star batch socket FD4X37mm FD5.5X37mm FD7X37mm
- 3pcs of 1/4 "cross star batch socket PH1X37mm, PH2X37mm, PH3X37mm
- 3pcs 1/4 "Torx star batch socket PZ1X37mm, PZ2X37mm, PZ3X37mm
- 10pcs 1/4*25L batch head set SL3, SL4, SL5, SL6, SL7, H2, H3, H4, H5, H6
- 10pcs 1/4*25L Batch head set T8, T10, T15, T20, T25, T27, T30, T40, S0, S1
- 10pcs 1/4*25L batch head set T-shaped center hole T10, T15, T20, T25, T27, T30, T40, S2, S3, AD
- 4pcs 1/4 "mirror E-type socket 4, 5, 6, 8mm
- 1pc 1/4 "mirror universal connection
- 1pc 1/4 "clasp
- 1pc 1/4 "Mirror bend bar 6"
- 1pc 1/4 "Mirrored sliding bar 4"
- 2pcs 1/4 "mirror extension bar 2", 6"
- 1pc 1/4 "spring rod
- 1pc 1/4 "square connecting rod
- 1pc 1/4 "Quickly remove the ratchet wrench

23PCS Tool Holder



Item NO.	Size			RMB
CL106804	23PCS			

- 4pcs of 7" professional grade dip plastic circlip pliers with straight shaft, bent shaft, straight hole and bent hole
- 1pc American Two-color long nose pliers 6"
- 1pc American Two-color Diagonal cutting pliers 6"
- 1pc American Two-color combination plier 8"
- 1pc of locking pliers 10"
- 1pc carp pliers 8"
- 6pcs of broken screw extractor
- 4pcs single color oil resistant screwdrivers Slotted:6X38, 6X100 Cross :6X38, 6X100
- 4pcs screwdrivers with oil resistant through-core monochrome handle Slotted: 6X150 8X200 Cross: 6X150 8X200

26pcs Tool Holder



Item NO.	Size			RMB
CL106805	26PCS			

- 9PCS 9PCS mat finish ball type hex key set (medium length)
- 9PCS 9PCS mat finish star type hex key set (medium length)
- 1pc 12.5mm series mirror pointer torque wrench 30kg
- 1pc flat foot three-claw filter wrench 65-110mm
- 1pc round head hammer with fiber handle 1.5P
- 1pc Fitter's hammer with fiber handle 300g
- 1pc Blowing dust gun
- 1pc tire pressure gauge
- 1pc High grade test pencil for cars
- 1pc 1/2 "six flower star batch socket T52X125mm

60 Pcs Tools For Integrated Wrench Holder



Item NO.	Size			RMB
CL106311	60PCS			

- 17pcs 1/2" mirror Gear type metric socket 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32mm
- 1pc 1/2" mirror extension bar 5 "(125mm)
- 1pc 1/2" mirror quickly remove the ratchet wrench
- 3pcs quick adapter 1/4"X10mm, 3/8"X13mm, 1/2"X19mm
- 16pcs High grade mirror combination ratchet wrench 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24mm
- 9pcs 9PCS Mirror star type hex key set (medium length)
- 5pcs 1/2" six flower star batch socket T27, T30, T40, T45, T50
- 5pcs 1/2" twelve-flower star batch sleeve M4, M5, M6, M8, M10

44 Pcs Auto Maintenance Tools Holder



Item NO.	Size			RMB
CL106205	44PCS			

- 1pc 3/8" mirror 12pt spark plug socket 14mm
- 2pcs 10mm series 6pt spark plug socket 16mm 21mm
- 9pcs 9PCS mat finish ball type hex key set (extended)
- 9pcs 9PCS mat finish star type hex key set (medium length)
- 2pcs European type Heavy duty adjustable wrench 8" 10"
- 1pc 1/2" six flower star batch socket T52X125mm
- 4pcs professional grade dip plastic circlip pliers 7 "shaft straight, shaft bent, hole straight, hole bent
- 2pcs Shock absorption disassembly by mounting socket (front and back)
- 1pc Hexagonal socket for oil base screws
- 1pc shock absorber socket
- 1pc special socket for Audi oil bottom screws
- 1pc bolt extractor
- 1pc stainless steel adjustable filter wrench
- 1pc flat foot three-claw filter wrench 65-110mm
- 6pcs broken screw extractor (thin)
- 1pc of nut separator (large)
- 1pc telescopic strong magnetic suction rod 1.5LB

122 Pcs Quick Repair Socket Tool Holder



Item NO.	Size			RMB
CL106302	122PCS			

- 7pcs 3/8"30mm medium length hole flower screw driver socket (T20, 25, 30, 40, 45, 50, 55)
- 5pcs 3/8"30mm medium length metric 12pt screw driver socket (M5, 6, 8, 10, 12)
- 7pcs 3/8"30mm medium length metric 6pt screw driver socket (4, 5, 6, 7, 8, 10, 12mm)
- 7pcs 3/8"70mm long flower screw driver socket (T20, 25, 30, 40, 45, 50, 55)
- 5pcs 3/8"70mm long metric 12pt screw driver socket (M-5, 6, 8, 10, 12)
- 7pcs 3/8"70mm long metric 6pt screw driver socket (4, 5, 6, 7, 8, 10, 12mm)
- 1pc 1/2" screw driver socket (10mm)
- 1pc 3/8" screw driver socket (10mm)
- 12pcs 3/8" mirror 6pt socket 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19,
- 7pcs 1/2" mirror 6pt socket 20, 21, 22, 24, 27, 30, 32mm
- 4pcs 1/2" electrophoretic impact 6pt socket 17, 19, 21, 24mm
- 8pcs 1/2" mirror E-type socket E8, E10, E11, E12, E14, E16, E18, E20mm
- 13pcs 1/4" mirror 6pt socket 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 4.5, 5.5mm
- 3pcs mirrors quickly remove the ratchet wrench 1/2", 3/8", 1/4"
- 3pcs mirror universal connection 1/2", 3/8", 1/4"
- 1pc 3/8" mirror 12pt spark plug socket 14mm
- 1pc special socket for cylinder head handle T52x125mm
- 2pcs 3/8" spark plug socket 16, 21mm
- 2pcs 1/2" mirror extension bar 5 ", 10"
- 1pc 3/8" mirror extension bar 6"
- 1pc 1/4" mirror extension bar 3"
- 1pc 1/4" spring rod
- 1pc 1/4" square extension bar
- 1pc three-purpose sliding head 3/8" to 1/2"
- 10pcs slotted, cross screw driver socket set
- 10pcs hexagonal, flower type screw driver socket set
- 1pc 1/4" clasp

36 PCS Quick Repair Tool Holder




Item NO.	Size			RMB
CL106306	36PCS			

- 12pcs oil drain wrench set
- 12pcs brake pump adjustment set
- 1pc T-type spanner for spark plug 16mm
- 4pcs crowbar
- 2pcs stainless steel adjustable filter wrench small and medium size
- 5pcs cap type oil filter wrench 15P79/80, 14p/64-65, 14p/66-67, 14P/73-74, 15P/74




127 PCS Sockets Tool Holder

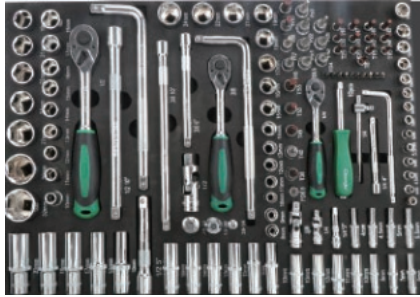

Item NO.	Size			RMB
CL106201	127pcs			

- 16pcs 1/2" mirror 6pt socket 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32mm
- 15pcs 3/8" mirror 6pt socket 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24mm
- 12pcs of 1/4" mirror 6pt socket 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm
- 5pcs 1/2" mirror extended 6pt metric socket 10, 13, 17, 19, 22mm
- 6pcs 3/8" mirror extended 6pt socket 10, 11, 12, 13, 14, 16mm
- 11pcs 1/4" mirror extended 6pt socket 4, 5, 6, 7, 8, 10, 11, 12, 13, 4.5, 5.5mm
- 3pcs mirror bent bar 1/2"X10", 3/8"X10", 1/4"X6"
- 3pcs mirrors quickly remove the ratchet wrench 1/2", 3/8", 1/4"
- 3pcs mirror universal joint 1/2", 3/8", 1/4"
- 17pcs 3/8" star batch socket PH1, PH2, PH3, slotted 5.5, slotted 6.5, slotted 4, PZ1, PZ2, HW6, HW7, HW8, HW10, T30, T40, T45, T50, T55
- 13pcs 1/4" star batch socket T8, T10, T15, T20, T25, T30, T40, HW3, HW4, HW5, HW6, HW7, HW8
- 10pcs 10pcs batch head set (slotted, PZ, PH)
- 2pcs adapter 3/8" to 1/4", 1/4" to 3/8"
- 1pc three-purpose sliding head 3/8" to 1/2"
- 2pcs 1/2" mirror extension bar 5 "10"
- 2pcs 3/8" mirror extension bar 6 ", 10"
- 2pcs 1/4" square extension bar and clasp
- 2pcs 1/4" extension bar 2 ", 4"
- 1pc 1/4" Mirror sliding bar 4"

126 Pcs Sockets Tool Holder

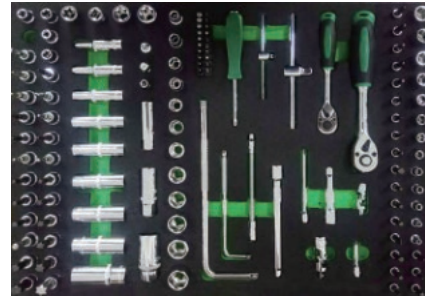

Item NO.	Size			RMB
CL106301	127PCS			

- 12pcs 3/8" mirror 6pt socket 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm
- 13pcs 1/4" mirror 6pt socket 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm
- 9pcs 3/8" mirror lengthened 6pt socket 8, 10, 11, 12, 13, 14, 15, 17, 19 mm
- 8pcs 3/8" mirror E-type socket E8, E10, E11, E12, E14, 16, E18, E20
- 24pcs 3/8" star batch socket PH1, PH2, FD5.5, FD6.5, PZ1, PZ2, PZ3, HW3, HW4, HW5, HW6, HW7, HW8, HW10, T10, T15, T20, T25, T30, T40, T45, T50, T55, T60,
- 20pcs 3/8" star batch socket FD4, FD5.5, FD7, PH1, PH2, PH3, T10, T15, T20, T25, T30, T40, HW4, HW5, HW6, HW7, PZ1, PZ2, PZ3
- 3pcs quickly remove the ratchet wrench 1/2", 3/8", 1/4"
- 2pcs adapters 3/8" to 1/4" and 1/4" to 3/8"
- 1pc 3/8" mirror 12pt spark plug socket 14mm
- 2pcs 3/8" spark plug socket 16, 21mm
- 2pcs 3/8" mirror extension bar 3", 6"
- 1pc 1/4" square extension bar
- 2pcs 1/4" mirror extension bar 2", 6"
- 1pc 1/4" spring rod
- 1pc 1/4" Mirror sliding bar 4"
- 1pc 3/8" Mirror sliding bar 6"
- 2pcs mirror universal connection 3/8" 1/4"
- 1pc 3/8" Mirror bend Bar 10"
- 1pc 1/4" Mirror bend Bar 6"
- 1pc 1/4" cartridge
- 10pcs Star type screwdriver socket
- 10pcs slotted, Cross screwdriver socket

29 PCS Wrench And Screwdriver Tool Holder



Item NO.	Size			RMB
CL106203	29PCS			

- 12pcs High grade mirror combination ratchet wrench 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm
- 2pcs mirror tubing wrenches 10x12, 12x14
- 10pcs single color oil resistant screwdrivers slotted 3X75, 5X75, 6X100, 6X150, 6X38, PH0X75, PH1X75, PH2X100, PH2X150, PH2X38
- 1pc American type Dual-color combination cutters 8"
- 1pc American type Dual-color long nose pliers 6"
- 1pc American type Dual-color Diagonal cutting pliers 6"
- 1pc industrial grade water mouth pliers 6"
- 1pc Industrial grade embossed handle Carp pliers 8"

31 Pcs Sockets Tool Holder



Item NO.	Size			RMB
CL106303	31PCS			

- 12pcs 12.5mm series electrophoresis impact lengthened 6pt socket 8, 10, 12, 13, 14, 15, 16, 17, 19, 21, 22, 23mm
- 1pc 12.5mm series impact connection driver socket M8, M10, M12, M14, T30, T40, T45, T50, HW6, HW8, HW10, HW12, HW14, HW17
- 1pc American type Heavy duty pipe wrench 250
- 1pc European type ball head extractor
- 1pc round head hammer with fiber handle
- 1pc special socket for cylinder head handle T52
- 1pc 12.5mm series professional Fixed distance torque wrench


41 Pcs Auto Protection Tools Holder



Item NO.	Size			RMB
CL106304	41PCS			

- 5pcs 3/8" mirror extended 6pt socket 15, 16, 17, 18, 19mm
- 7pcs 1/4" mirror extended 6pt socket 8, 9, 10, 11, 12, 13, 14mm
- 1pc adapter 1/4" to 3/8"
- 2pcs mirror quickly remove the ratchet wrench 3/8" 1/4"
- 4pcs L type socket wrench 8, 10, 12, 13mm
- 4pcs mirror double-ended ring ratchet wrench 8-10, 12-13, 14-15, 17-19mm
- 6pcs 6pcs diamond file set Φ5X180
- 5pcs broken screw extractor
- 1pc straight head aviation scissors
- 1pc 3/8" mirror extension bar
- 5pcs 5pcs plastic steel crowbar
- 1pcs blowing dust gun

12 Pcs Pieces Of Professional Sheet Metal Tool Holder

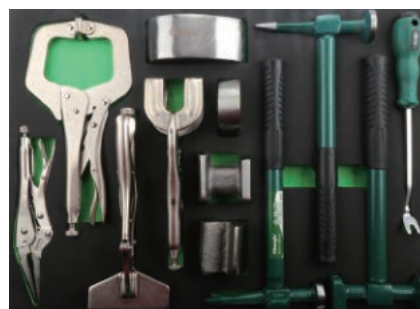

Item NO.	Size			RMB
CL106307	12PCS			

- 1pc welding locking pliers 10"
- 1pc American type C locking pliers 11"
- 1pc long nose pliers 9"
- 1pc flat mouth locking pliers 10"
- 1pc glue mouth screwdriver 6"
- 1pc straight-face finishing sheet metal hammer
- 1pc crane mouth finishing sheet metal hammer
- 1pc light reduction sheet metal hammer
- 1pc spatula sheet metal lining
- 1pc curved sheet metal lining
- 1pc pier sheet metal lining
- 1pc flat sheet metal lining


13 Pcs Clamp Tool Sholder



Item NO.	Size			RMB
CL106310	13PCS			

- 4pcs of 7" professional grade dip plastic circlip pliers with straight shaft, bent shaft, straight hole and bent hole
- 1pc American type Dual-color combination cutters 8"
- 1pc American type Dual-color long nose pliers 6"
- 1pc American type Dual-color Diagonal cutting pliers 6"
- 1pc industrial grade water mouth pliers 6"
- 1pc carp pliers 8"
- 1pc cable scissors 8"
- 1pc mini bolt cutter 200mm
- 1pc portable PVC pipe cutter
- 1pc multifunctional cable press stripping pliers 8"

29 Pcs Wrench Tool Holders

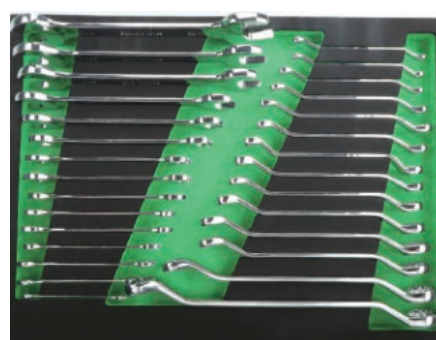

Item NO.	Size			RMB
CL106312	29PCS			

- 14pcs high-grade mirror ring wrench
6X7, 8x10, 10x12, 11x13, 12x14, 13x15, 14x17, 13x16, 17x19, 18x21, 19x22, 22x24, 24x27, 5.5 x7
- 15pcs high-grade mirror double open end wrench
6x7, 8x10, 9x11, 10x12, 11x13, 12x14, 13x15, 14x17, 16x18, 17x19, 19x22, 22x24, 24x27, 27x30, 30x32



21 PCS Auto Maintenance Tools Holder



Item NO.	Size			RMB
CL106305	21PCS			

- 3pcs 1/2" mirror 6pt socket 17, 19, 21mm
- 1pc 1/2" mirror extension bar 5 "(125mm)
- 1pc 1/2" professional distance torque wrench 42-210N.m
- 9pcs mirror ball type hex key set (extended)
- 2pcs single color oil resistant screwdrivers slotted 6X100, PH2X100
- 1pc industrial grade water mouth pliers 6"
- 1pc external thermostatic electric soldering iron 60W
- 1pc Multimeter for multifunctional vehicle repair
- 1pc fine digital display vernier caliper 150mm
- 11pc solder wire

25 Pcs Auto Maintenance Tools Holder



Item NO.	Size			RMB
CL106206	25PCS			

- 1pc 1/2" mirror pointer torque wrench 300N.m
- 5pcs L type socket wrench 8, 10, 12, 13, 14mm
- 4pcs impact batch screwdriver FD, PH1, PH2, PH3
- 4pcs lengthened impact batch screwdriver PH1, PH2, PH3
- 1pc round head hammer with plastic-coated fiber handle 2LB
- 1pc High grade plastic-coated fiber handle Fitter's hammer -300g
- 2pcs octagonal steel pin 2X150mm 5X150mm
- 1pc double-ended round flat chisel 20X12X200mm
- 1pc Octagonal center punch 4mm
- 1pc utility knife
- 13pcs of high-quality impact screw batch
- 1pc high-grade plastic case tape measure 5mX19mm
- 1pc stainless steel straight rule 150mm
- 1pcs blowing dust gun(6mmx100mm)


40 Pcs Auto Protection Tool Holder



Item NO.	Size			RMB
CL106313	40PCS			

- 1pc 1/2" mirror pointer torque wrench 300N.m
- 1pc High grade test pencil for cars - green transparent handle
- 1pc utility knife - 5 blades
- 1pc tire pressure gauge
- 1pc flat foot three-claw filter wrench 65-110mm
- 6pcs broken screw extractor 6PCS
- 1pc high-grade plastic case tape measure 5mX19mm
- 1pc telescopic strong magnetic suction rod 1.5LB
- 1pc blowing dust gun (6mmx100mm)
- 1pc fitter's hammer with fiber handle 500g
- 4pcs octagonal pin stamping 4X150, 8X150, 8X151, 15X150mm
- 7pcs 7pcs of air conditioner tube remover
- 14pcs feelers 0.05-1.0mm

16 PCS Electrical Repair Tools Holder

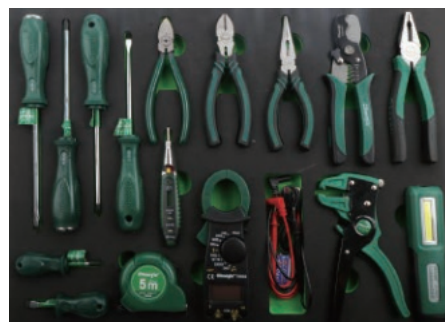

Item NO.	Size			RMB
CL106308	16PCS			

- 1pc with lighting induction digital display test pencil
- 4pcs single color oil resistant screwdrivers slotted 6X125, 6X38 PH2X125, PH2X38
- 2 screwdrivers with oil resistant through-core monochrome handle slotted 6X150 PH2X150
- 1pc American type Dual-color long nose pliers 6"
- 1pc American type Dual-color Diagonal cutter pliers 6"
- 1pc industrial grade water mouth pliers 6"
- 1pc Industrial grade Japanese high-grade combination pliers 7"
- 1pc cable stripping multi-purpose pliers 7"
- 1pc duck Bill type Multi-purpose Wire stripper 7"
- 1pc digital clamp multimeter
- 1pc high-grade plastic case tape measure 5mX19mm
- 1pc COB rechargeable LED working light

35 Pcs Tools For Quick Repair Wrench Tools Holder



Item NO.	Size			RMB
CL106202	35PCS			

- 10pcs mirror high-grade ring wrench 6X7, 8x10, 10x12, 11x13, 12x14, 14x17, 17x19, 18x21, 22x24, 24x27
- 14pcs mirror high-grade combination wrenches 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24mm
- 11pcs mirror high-grade double open end wrench 6x7, 8x10, 10x12, 11x13, 12x14, 14x17, 17x19, 18x21, 22x24, 24x27, 30x32

31 Pcs Pliers Screwdriver Tool Holder



Item NO.	Size			RMB
CL106316	31PCS			

- 12.5mm series mirror pointer torque wrench 30kg
- Industrial grade Oil Resistant ring Screwdriver 5x100 T20, 6x150 T30
- A Series screwdrivers 3*75, 6*150 slotted 3*75, 6*150 cross
- 9PCS mat finish ball type hex key set
- Carp pliers 8"
- 7 "professional-grade dip plastic retainer pliers with straight shaft and straight hole
- Professional grade German type long nose pliers 6"
- 7pcs Cooler tubing removal tool set
- 4pcs Car audio disassembly tool set

34 Pcs Spanner Tools Holder



Item NO.	Size			RMB
CL106314	34PCS			

- 12pcs L type socket wrench 8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22mm
- 22pcs mirror high-grade combination wrench 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27mm


75 Pcs Auto Protection Tools Holder



Item NO.	Size			RMB
CL106309	75PCS			

- 13pcs 1/2 "mirror 6pt socket 8, 9, 10, 11, 12, 13, 14, 15, 16, 18, 20, 22, 24mm
- 4pcs 1/2 "electrophoretic impact 6pt socket 17, 19, 21, 23mm
- 4pcs 1/2 "blue lengthened 12pt metric socket 10, 12, 13, 14mm
- 14pcs 1/2 "mirror lengthened 6pt metric socket 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24mm
- 8pcs 3/8 "mirror E-type socket E8, E10, E11, E12, E14, E16, E18, E20mm
- 2pcs 1/2 "star batch socket T52X125mm, M9X100mm
- 1pc adapter 1/2 "to 3/8"
- 2pcs three-purpose sliding head 1/2 to 3/8 3/8 to 1/2
- 2pcs 1/2 "spark plug socket 16, 21mm
- 1pc 1/2 "mirror 12pt spark plug socket 14mm
- 2pcs 1/2 "mirror extension bar 5", 10"
- 1pc 1/2 "Mirror bent bar 10"
- 1pc 1/2 "Mirror sliding bar 10"
- 1pc 1/2 "mirror quickly remove the ratchet wrench
- 1pc 1/2 "mirror universal joint
- 9pcs 9PCS ball type hex key set
- 9pcs 9PCS mat finish star type hex key set

23 Pcs Integrated Maintenance Tools Holder

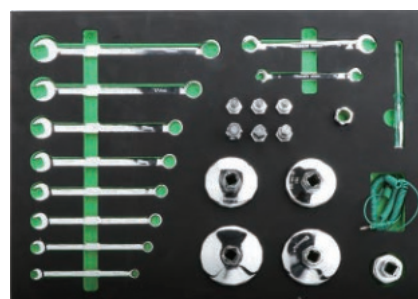

Item NO.	Size			RMB
CL106315	23PCS			

- Mirror tubing wrench (Cr-V)8x10, 12x14
- Mirror high-grade combination wrench (Cr-V)8, 10, 12, 13, 14, 15, 17, 19mm
- High grade test pencil for cars - green transparent handle
- Shock absorber socket (automotive tool B)
- Alloy cap type oil filter wrench -6P/36
- cap type oil filter wrench 901, 902, 903, 91-1
- Oil release screws 10, 14, 12, 9, 17, 8mm



31pcs Vde Socket Tool Set Holder



Item NO.	Size			RMB
CL107101	31PCS			

- 3/8 "VDE metric hexagonal socket 8, 10, 12, 13, 14, 17, 19, 22mm
- 1/2 "VDE metric hex socket 10, 11, 12, 13, 14, 16, 17, 19, 21, 22, 24mm
- 1/2 "VDE metric bit sockets 4, 5, 6, 8, 10mm
- 1/2 "VDE ratchet wrench 250mm
- 3/8 "VDE ratchet wrench 200mm
- 1/2 "VDE extension rod 125-250mm
- 3/8 "VDE extension rod 150, 250mm
- 1/2 "VDE dual color T-shaped wrench 200mm

20pcs Vde Open End Wrench Screwdriver Tool Holder



Item NO.	Size			RMB
CL107102	20PCS			

- VDE open end wrenches 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24mm
- VDE electrician screwdriver 3X60mm cross
- VDE electrician screwdriver 4.5X80mm cross
- VDE electrician screwdriver 6X100mm cross
- VDE electrician screwdriver 2.5X75mm flat head
- VDE electrician screwdriver 4X100mm flat head
- VDE electrician screwdriver 5.5X125mm flat head
- 8 "VDE insulated open end wrench

17pcs Vde Box Wrench Pliers Tool Set Holder



Item NO.	Size			RMB
CL107103	17PCS			

- VDE ring wrenches 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24mm
- VDE detachable blade cable cutter
- VDE electrician diagonal pliers 6 inches
- VDE electrician wire pliers 8 inches
- VDE electrician pointed nose pliers 8 inches

330 Pcs Auto repair tools integrated set of tools car



Equipped with CL713017 Seven-layer tool car



Item NO.: CL106804



Item NO.: CL106805



Item NO.: CL106801



Item NO.: CL106802




Item NO.: CL106803

Item NO.	Size			RMB
CL106410	330PCS			6195.56

258 Pcs Of Rapid Maintenance Tools




Equipped with CL713006 Six-layer tool car




Item NO.: CL106306



Item NO.: CL106302



Item NO.: CL106311



Item NO.: CL106313

Item NO.	Size			RMB
CL106401	258PCS			



VDE
绝缘


176 Pcs Of Quick Repair Tools



Equipped with CL713017 Seven-layer tool car



Item NO.: CL106302



Item NO.: CL106316



Item NO.: CL106315

Item NO.	Size			RMB
CL106409	176PCS			4331.12


106 Pcs Of Tire And Motor Maintenance Tools



Equipped with CL713004 Four-layer tool car




Item NO.: CL106312



Item NO.: CL106308



Item NO.: CL106305




Item NO.: CL106313

Item NO.	Size			RMB
CL106403	106PCS			

236 Pcs Of Professional Sheet Metal Tools



Equipped with CL713017 Seven-layer tool car




Item NO.: CL106307




Item NO.: CL106203



Item NO.: CL106206



Item NO.: CL106205



Item NO.: CL106301

Item NO.	Size			RMB
CL106404	236PCS			


228 Pcs Of Machine Tool car




Equipped with CL713006 Six-layer tool car




Item NO.: CL106312



Item NO.: CL106313



Item NO.: CL106308



Item NO.: CL106302



Item NO.: CL106305

Item NO.	Size			RMB
CL106405	228PCS			



68 Pcs New Energy Tool Set



Equipped with CL713006 Six-layer tool car



Item NO.: CL107101



Item NO.: CL107102



Item NO.: CL107103

Item NO.	Size			RMB
CL106411	68PCS			

Oxford Cloth Tool Bag



Item NO.	Size			RMB
CL704662	570X170mm	50		48.00

- 600D Oxford cloth thickened, wear-resistant and waterproof
- Multi-pocket and multi-slot bag design, easy to use, organize and carry tools
- Thickened bottom, heavy bearing and durable

Plastic Bottom Tool Bag



Item NO.	Size			RMB
CL704663	16"	20		

- Double layer encrypted 900D Oxford cloth, moisture-proof and moisture-proof.
- 10 # Thickened zipper, smooth to use.
- Inner lining with 2 pieces of 5 # steel wire, large opening, quite wide and stylish.
- Thickened hardware, surface rust prevention treatment.
- PP plastic outsole, double stitched, oil resistant, puncture resistant, suitable for various working environments.
- Multiple reinforcement treatments with multiple knots, with a load-bearing capacity greater than 50kg.
- Multi pocket design facilitates standardized classification of workpieces

Oxford Cloth Tool Bag



Item NO.	Size			RMB
CL704661		40		

- 600D Oxford cloth thickened, wear-resistant and waterproof
- Multi-pocket and multi-slot bag design, easy to use, organize and carry tools
- Thickened bottom, heavy bearing and durable

139 Pcs Of VDE Insulating Tool Sets




Equipped with CL713017 Seven-layer tool car




21pcs VDE open end and wrench tool Holder
Item NO.: CL900107



8pcs VDE socket tool Holder
Item NO.: CL900109



12pcs VDE T type wrench tool Holder
Item NO.: CL900110



24pcs VDE electrician tool Holder
Item NO.: CL900106



28pcs VDE socket tool Holder
Item NO.: CL900104



27pcs VDE socket&pliers tool Holder
Item NO.: CL900105



19pcs VDE ring wrench tool Holder
Item NO.: CL900108

Item NO.	Size			RMB
CL106408	139PCS			

VDE
绝缘

Oxford Cloth Tool Bag



Item NO.	Size			RMB
CL704653	580X170mm	30		

- Made of waterproof nylon fabric, wear-resistant and waterproof, Fanny Pack black with green strip
- Multi-pocket and multi-slot bag design, easy to use, organize and carry tools

Oxford Cloth Tool Bag



Item NO.	Size			RMB
CL704651	13" (300x250x200mm)	30		
CL704652	16" (380x300x260mm)	25		

- 600D Oxford cloth thickened, wear-resistant and waterproof
- Multi-pocket and multi-slot bag design, easy to use, organize and carry tools
- Thickened bottom, heavy bearing and durable

Oxford Cloth Tool Bag



Item NO.	Size			RMB
CL704659	200X250mm		50	

- 600D Oxford cloth thickened, wear-resistant and waterproof
- Multi-pocket and multi-slot bag design, easy to use, organize and carry tools
- Thickened bottom, heavy bearing and durable

Tool Bag



Item NO.	Size			RMB
CL704655	320X280mm	30		

- Polyester cloth precision work sewn, durable, easy to carry
- Unique design, easy to use

Oxford Cloth Tool Bag



Item NO.	Size			RMB
CL704654	250X150X230mm	30		

- 600D Oxford cloth thickened, wear-resistant and waterproof
- Multi-pocket and multi-slot bag design, easy to use, organize and carry tools
- Thickened bottom, heavy bearing and durable



Workbench



Item NO.	Size			RMB
CL704614	156X86X82cm	1		

• The table is made of stainless steel integrated molding, easy to clean, with oil trough, dust gun, multifunctional socket, pressure regulating valve, waste oil collection bucket and other functions. Easy to use

Combined Tool Cabinet



Item NO.	Size	RMB
CL704616	3960*457*2000mm	
CL704631	High cabinet 660*457*2000mm	
CL704632	Four-layer tool cabinet 660*457*863mm	
CL704633	Two door tool cabinet (with laminate)	
CL704634	Garbage cabinet	
CL704635	Wall cabinet	
CL704636	Mesh plate	
CL704637	Rubber wooden board	

• The whole tool cabinet is made of modular, smooth and strong, and the hanging plate is made of universal mesh, which can be changed at will. Tool location, easy to use

• The tool cabinet is reasonably configured and can be assembled at will to meet the needs of different working environments



VDE
绝缘



VDE INSULATION TOOLS



Vde Open Spanner



Item NO.	Size	RMB
CL901108	8mm	
CL901109	9mm	
CL901110	10mm	
CL901111	11mm	
CL901112	12mm	
CL901113	13mm	
CL901114	14mm	
CL901115	15mm	
CL901116	16mm	
CL901117	17mm	
CL901118	18mm	
CL901119	19mm	
CL901120	20mm	
CL901121	21mm	
CL901122	22mm	
CL901123	23mm	
CL901124	24mm	

- Forged by chromium-vanadium steel, integrated heat treatment, surface plated with chromium anti-rust treatment.
- Double color insulated flame retardant plastic injection handle, ergonomic design, comfortable to hold
- The insulation of the handle has passed the German VDE 1000V GS certification and meets the EN/IEC 60900 standard

Vde Ring Spanner



Item NO.	Size	RMB
CL901208	8mm	
CL901209	9mm	
CL901210	10mm	
CL901211	11mm	
CL901212	12mm	
CL901213	13mm	
CL901214	14mm	
CL901216	16mm	
CL901217	17mm	
CL901218	18mm	
CL901219	19mm	
CL901221	21mm	
CL901222	22mm	
CL901224	24mm	

- Comply with DIN 3113 standard manufacturing requirements;
- Forged by chromium-vanadium steel, integrated heat treatment, surface plated with chromium anti-rust treatment.
- Double color insulated flame retardant plastic injection handle, ergonomic design, comfortable to hold
- The insulation of the handle has passed the German VDE 1000V GS certification and meets the EN/IEC 60900 standard

Vde Adjustable Wrench



Item NO.	Size	RMB
CL901402	8"	
CL901403	10"	
CL901404	12"	

- Comply with DIN 3117 standard manufacturing requirements
- It is created by special chrome vanadium steel and created by oil fired only and chrome plated for rust prevention
- The handle is covered with flame-retardant material, which is made of imported TPE material and meets the European PAHS non-toxic and environmental protection requirements
- Normal operation at low temperature -25°C+3°C and high temperature 70°C, with ergonomic design
- The product has passed the German VDE 1000V GS certification and meets the EN/IEC 60900 standard

Vde T Type square bar



Item NO.	Size	RMB
CL901001	1/2" 200mm	
CL901002	3/8" 200mm	
CL901003	1/4" 125mm	

- It is created by special chrome vanadium steel and created by oil fired only and chrome plated for rust prevention
- The handle is covered with flame-retardant material, which is made of imported TPE material and meets the European PAHS non-toxic and environmental protection requirements
- Normal operation at low temperature -25°C+3°C and high temperature 70°C, with ergonomic design
- The product has passed the German VDE 1000V GS certification and meets the EN/IEC 60900 standard

VDE
绝缘

Vde Combination Pliers



Item NO.	Size		RMB
CL609510	6"	6/60	
CL609511	8"	6/60	

- It is forged by special tool steel and fired by oil only and the head is plated with chromium to prevent rust
- The clamping surface area of the nipper mouth is suitable for flat and round workpiece, and the cutting edge is subjected to special high-frequency heat treatment The hardness reaches HRC56-60°
- 1.6mm hard metal wire can be cut, and the handle is made of imported TPE material
- Comply with European PAHS non-toxic environmental protection requirements, Ergonomic appearance of handle for normal operation at low temperature -25°C+3°C and high temperature 70°C

Vde Diagonal Nose Pliers



Item NO.	Size		RMB
CL609515	6"	6/60	

- VDE electrician diagonal nose pliers
- Made in accordance with DIN ISO 5749
- Forged by special tool steel and fired by oil only
- The cutting edge after induction hardening can cut 1.5mm soft and hard wire,
- The handle is made of imported TPE material, in line with the European PAHS non-toxic environmental protection requirements, at low temperature -25°C+3°C
- Normal operation at high temperature of 70°C
- Handle sleeve is VDE 1000V GS certified to meet EN/IEC 60900 standard

VDE Bent Nose Pliers



Item NO.	Size		RMB
CL609514	8"	6/60	

- Forged by special tool steel and fired by oil only and chrome plated on the head
- Sharp semi-circular jaws with functional teeth, capable of cutting 1.6mm hard metal wire, suitable for electronic components clamp and shear.
- The handle is made of imported TPE material, in line with the European PAHS non-toxic environmental protection requirements, at low temperature -25°C+3°C Normal operation at high temperature of 70°C
- Handle sleeve is VDE 1000V GS certified to meet EN/IEC 60900 standard

Vde Big Head Diagonal Nose Pliers



Item NO.	Size		RMB
CL609516	7"	6/60	

- Made in accordance with DIN ISO 5749
- Forged by special tool steel and fired by oil only
- The Angle torque transmission of the cutting edge is combined with the ergonomic handle to ensure that less hand force is applied the handle is made of imported TPE raw material
- In line with European PAHS non-toxic environmental protection requirements, at low temperature -25°C+3°C, high temperature 70°C
- Handle sleeve is VDE 1000V GS certified to meet EN/IEC 60900 standard

Vde Long Nose Pliers



Item NO.	Size		RMB
CL609512	6"	6/60	
CL609513	8"	6/60	

- Through the German VDE insulation voltage 1000V GS certification EN 60900 0682/Part 201 standard
- Forged by special tool steel and fired by oil only and chrome plated on the head
- Sharp semi-circular jaws with functional teeth, suitable for clamping and shearing of electronic components, shearing 1.6mm hard metal cable
- The handle is made of imported TPE material, in line with the European PAHS non-toxic environmental protection requirements, at low temperature -25°C+3°C
- The handle is ergonomic in appearance for normal operation under high temperature of 70°C, comfortable to use, and the cutting edge is special The hardness of high frequency heat treatment reaches HRC55-60°

Vde Cable Cutter



Item NO.	Size		RMB
CL609518	6"	6/60	

- Comply with DIN 5263 standard manufacturing requirements
- It is forged by special steel and fired only after oil mature, and the head is treated with manganese phosphate for rust prevention
- Fine sharpening hardened edge, shearing 50mm2 cable, hinged with adjustable screw
- Used for shearing single or multiple strands of copper and aluminum cables. The handle is made of imported TPE material
- In line with European PAHS non-toxic environmental protection requirements, normal use at low temperature -25°C+3°C, high temperature 70°C
- Handle grips is VDE 1000V GS certified to meet EN/IEC 60900 standard



VDE
绝缘



Vde Wire Stripper



Item NO.	Size		RMB
CL609517	6"	6/60	

- Forged by fine chromium vanadium steel, fired by oil only and chrome plated on the head
- Diameter of wire or harness can be adjusted by knurled screws and lock nuts (5.0mm~10.0mm²) with reset switch, for single, multi-strand and thin stranded conductors or conductors with plastic or rubber insulation for skin
- The handle is made of imported TPE material, in line with the European PAHS non-toxic environmental protection requirements, at low temperature -25°C+3°C Normal operation at high temperature of 70°C
- Handle grips is VDE 1000V GS certified to meet EN/IEC 60900 standard

Vde Screwdriver(+)



Item NO.	Size		RMB
CL505801	3X60	12/120	
CL505802	4.5X80	12/120	
CL505803	6X100	12/120	

- The cutter bar is made of chromium-vanadium steel with an insulating coating and flame retardant layer
- The insulation of the handle and cutter stem shall be 1000V with drive mark and specification on the handle
- The handle is made of imported TPE+PP plastic and has passed the European PAHS non-toxic environmental protection certification
- It can pass the full test of 10000V under the condition of low temperature -20°C and high temperature 70°C
- Screw batch adopts KORDT gauge imported from Germany for inspection requirements
- Handle grips is VDE 1000V GS certified to meet EN/IEC 60900 standard

Vde Water Pump Pliers



Item NO.	Size		RMB
CL609519	10"	6/60	

- Comply with DIN ISO 8976 standard manufacturing requirements
- Forged by fine work of high quality chromium-vanadium steel, integral hardening heat treatment, black surface and two surface polishing anti-rust treatment
- Used for clamping, fixing, plate pressing and locking installation and disassembly
- The handle adopts imported environmental TPE two-color insulation material, which can resist the low temperature of minus 40 degrees Celsius and is comfortable to hold
- Handle grips is VDE 1000V GS certified to meet EN/IEC 60900 standard

Vde Screwdriver(-)



Item NO.	Size		RMB
CL505701	2.5X75	12/120	
CL505702	4X100	12/120	
CL505703	5.5X125	12/120	
CL505704	6.5X150	12/120	

- Comply with DIN 5263 standard manufacturing requirements
- The cutter bar is made of chromium-vanadium steel with an insulating coating and flame retardant layer
- The handle is made of imported TPE+PP plastic and has passed the European PAHS non-toxic environmental protection certification
- It can be used normally under the condition of low temperature -20°C and high temperature 70°C, and pass the full test of high pressure 10000V
- Handle grips is VDE 1000V GS certified to meet EN/IEC 60900 standard

VDE 8PCS Screwdriver



- 4PCS 2. 5X75mm 4X100mm
- 5. 5X125mm 6. 5X150mm
- 3PCS 3X60mm 4.5X80mm
- 6X100mm
- 1PC VDE Electric measuring pen



Item NO.	Size		RMB
CL505908	8PCS	1/20	

- The cutter bar is made of chromium-vanadium steel with an insulating coating and flame retardant layer
- The insulation of the handle and cutter stem shall be 1000V with drive mark and specification on the handle
- The handle is made of imported TPE+PP plastic, which has passed the European PAHS non-toxic environmental protection certification
- It can be used normally under the condition of low temperature -20°C and high temperature 70°C, and pass the full test of high pressure 10000V
- The handle is VDE 1000V GS certified and complies with EN/IEC 60900 standard

VDE
绝缘

Vde Cable Knife



Item NO.	Size		RMB
CL901302			

- The blade is special steel, molded by CNC grinding, and the hardness of the edge reaches HRC56-60° after special high-frequency heat treatment
- The handle is made of imported TPE material, in line with the European PAHS non-toxic environmental protection requirements, at low temperature -25°C+3°C At a high temperature of 70°C
- Normal operation, ergonomic handle shape, comfortable grip, with special folding protection knife cover
- Handle and knife grips are VDE 1000V GS certified and comply with EN/IEC 60900 standard

Vde Electrician Knife



Item NO.	Size		RMB
CL901304	直柄		

- The blade is special steel, molded by CNC grinding, and the hardness of the edge reaches HRC56-60° after special high-frequency heat treatment
- The handle is made of imported TPE material, in line with the European PAHS non-toxic environmental protection requirements, at low temperature -25°C+3°C At a high temperature of 70°C
- Normal operation, ergonomic handle shape, comfortable grip, with protective knife cover.
- Handle and knife grips are VDE 1000V GS certified and comply with EN/IEC 60900 standard

Vde Scissors



Item NO.	Size		RMB
CL901301			

- The tool bar is made of high quality chromium vanadium steel, and the hardness reaches HRC55-60° after special high-frequency heat treatment manganese phosphate antirust treatment.The handle and cutter bar group are ergonomic and comfortable to operate
- The handle is made of imported TPE material, in line with the European PAHS non-toxic environmental protection requirements, at low temperature -25°C+3°C It can be used normally at high temperature of 70°C
- The product has passed the German VDE 1000V GS certification and meets the EN/IEC 60900 standard

VDE Ratchet Wrench



Item NO.	Size		RMB
CL900801	1/2"		
CL900802	3/8"		
CL900803	1/4"		

- Comply with DIN 3122 standard manufacturing requirements
- It is forged by special chromium-vanadium steel and fired by oil only and treated by chromium plating for rust prevention
- Ratchet wrench adopts 48T design, high torque, long service life, with quick release locking device
- The overall outer coating is made of imported TPE materials, which meets the non-toxic and environmental protection requirements of European PAHS
- It can operate normally at low temperature -25°C+3°C and high temperature 70°C, with ergonomic handle use comfortable
- The product has passed the German VDE 1000V GS certification and meets the EN/IEC 60900 standard

Vde Connecting Bar



Item NO.	Size	RMB
CL900901	1/2" 125mm	
CL900902	1/2" 250mm	
CL900903	3/8" 150mm	
CL900904	3/8" 250mm	
CL900905	1/4" 100mm	
CL900906	1/4" 150mm	

- It is forged by special chromium vanadium steel and fired by oil only and treated by chromium plating for rust prevention
- The outer coating material of the connecting rod is imported TPE raw material, which meets the non-toxic and environmental protection requirements of European PAHS
- Normal operation at low temperature -25°C+3°C and high temperature 70°C, with ergonomic design
- The product has passed the German VDE 1000V GS certification and meets the EN/IEC 60900 standard



VDE
绝缘

Vde Socket



	Item NO.	Size	RMB		Item NO.	Size	RMB
1/4"	CL900205	5mm		1/2"	CL900408	8mm	
	CL900206	6mm			CL900410	10mm	
	CL900207	7mm			CL900411	11mm	
	CL900208	8mm			CL900412	12mm	
	CL900209	9mm			CL900413	13mm	
	CL900210	10mm			CL900414	14mm	
	CL900211	11mm			CL900415	15mm	
	CL900212	12mm			CL900416	16mm	
	CL900213	13mm			CL900417	17mm	
	CL900214	14mm			CL900418	18mm	
	CL900308	8mm			CL900419	19mm	
	CL900310	10mm			CL900420	20mm	
3/8"	CL900312	12mm			CL900421	21mm	
	CL900313	13mm			CL900422	22mm	
	CL900314	14mm			CL900423	23mm	
	CL900317	17mm			CL900424	24mm	
	CL900319	19mm			CL900427	27mm	
	CL900322	22mm			CL900430	30mm	
					CL900432	32mm	

- It is forged by special chromium vanadium steel and fired by oil only and treated by chromium plating for rust prevention
- The outer coating material of hexagonal socket is imported TPE material, which meets the European PAHS non-toxic and environmental protection requirements
- Normal operation at low temperature -25°C+3°C and high temperature 70°C, with ergonomic design
- The product has passed the German VDE 1000V GS certification and meets the EN/IEC 60900 standard

VDE Hex Key and Screwdriver socket



	Item NO.	Size	RMB		Item NO.	Size	RMB
1/2"	CL900504	4mm		3/8"	CL900606	6mm	
	CL900505	5mm			CL900608	8mm	
	CL900506	6mm			CL900703	3mm	
	CL900508	8mm			CL900704	4mm	
	CL900510	10mm			CL900705	5mm	
3/8"	CL900604	4mm			CL900706	6mm	
	CL900605	5mm					

- It is forged by special chromium vanadium steel and fired by oil only and treated by chromium plating for rust prevention
- Outer coating material of inner hexagon screwdriver head is made of imported TPE raw material, in line with European PAHS non-toxic and environmental protection requirements
- It can operate normally at low temperature -25°C+3°C and high temperature 70°C, and the shape of the handle conforms to ergonomic design
- The product has passed the German VDE 1000V GS certification and meets the EN/IEC 60900 standard

Vde Torx Hex Key



Item NO.	Size	RMB
CL901910	T10	
CL901915	T15	
CL901920	T20	
CL901925	T25	
CL901930	T30	
CL901940	T40	
CL901945	T45	
CL901950	T50	

- Conform to Carcam standard specification and size requirements of original German factory
- It is made of chromium-vanadium steel, with integral heat treatment and anti-rust treatment of manganese phosphate surface
- Double color insulated flame retardant plastic injection handle, ergonomic design, comfortable to hold
- The insulation of the handle has passed the German VDE 1000V GS certification and meets the EN/IEC 60900 standard

Vde 6pt Hex Key



Item NO.	Size	RMB
CL901804	4MM	
CL901805	5MM	
CL901806	6MM	
CL901808	8MM	


- It is made of chromium-vanadium steel, with integral heat treatment and anti-rust treatment of manganese phosphate surface.
- Double color insulated flame retardant plastic injection handle, ergonomic design, comfortable to hold
- The insulation of the handle has passed the German VDE 1000V GS certification and meets the EN/IEC 60900 standard

VDE
绝缘

Cutting drilling abrasive Abrasive consumables class




60mm Double-end Bits



Item NO.	Size	L(mm)			RMB
CL502505	PH2	60	10/200/1600	0.02	

- Made of high-quality CR-V steel, used for the installation and disassembly of screws and fasteners



65mm Double-end Bits



Item NO.	Size	L(mm)			RMB
CL502511	PH2	65	1200	0.02	

- S2 alloy steel
- hardness up to HRC58~60°, batch head with strong magnetic


65mm Double-end Bits



Item NO.	Size	L(mm)			RMB
CL502510	PH2	65	10/100/2000	0.02	

- Made of S2 silicon alloy steel
- Used for the installation and disassembly of screw fasteners

65mm Double-end Bits



Item NO.	Size	L(mm)			RMB
CL502502	PH2	65	10/100/1400	0.02	

- S2 alloy steel
- hardness up to HRC58~60°, batch head with strong magnetic

65mm Double-end Bits (with locator)



Item NO.	Size			RMB
CL508701	S2H1/4*65*PH2DE	10/140/560	0.02	

- S2 silicon alloy steel.
- The head of the batch is attached with a strong magnetic coil, which is used for screw adsorption to facilitate the installation and disassembly of fasteners
- The positioner can be disassembled, and can be used as a swivel head after removal

Double Head Bits



Item NO.	Size			RMB
CL502512	PH2*(-)6.0	1200	0.02	

- Made of S2 alloy steel material, it has high hardness, high torque, and is sturdy and durable.
- The cross shaped double head design improves work efficiency and is convenient to carry.
- The head is equipped with strong magnetism, which can firmly grip the screws, making it easy to operate and use.

100mm Double-end Bits



Item NO.	Size	L(mm)	🚚	📦	RMB
CL502506	PH2	100	10/200/800	0.03	

- S2 alloy steel.
- Used for fastener screw installation and disassembly
- The hardness of the batch head is HRC58~60°, and the batch head has strong magnetic field

150mm Double-End Bits



Item NO.	Size	L(mm)	🚚	📦	RMB
CL502507	PH2	150	5/150/600	0.04	

- S2 alloy steel
- The batch head is attached with strong magnetic field for screw adsorption
- Convenient for installation and disassembly of fasteners

200mm Double-End Bits



Item NO.	Size	长度	🚚	📦	RMB
CL502513	PH2	200mm	200/800		

- S2 alloy steel
- The batch head is attached with strong magnetic field for screw adsorption
- Convenient for installation and disassembly of fasteners

Copper-Colored Impact Bit(-)



Item NO.	Size	L(mm)	A(mm)	🚚	📦	RMB
CL502701	40mm	40	8	20/3000	0.03	

- S2 alloy steel
- Suitable for electric batch, impact driver, impact batch, etc., not easy to break

Copper-colored Deep Impact Bit(-)



Item NO.	Size	L(mm)	A(mm)	🚚	📦	RMB
CL502901	80mm	80	8	20/1500	0.04	

- S2 alloy steel
- Suitable for electric batch, impact driver, impact batch, etc., not easy to break


Copper-colored Impact Bit(+)



Item NO.	Size	L(mm)	A(mm)	🚚	📦	RMB
CL502801	PH1	80	8	20/3000	0.03	
CL502802	PH2	80	8	20/3000	0.03	
CL502803	PH3	80	8	20/1600	0.03	

- S2 alloy steel
- Suitable for electric batch, impact driver, impact batch, etc., not easy to break

Copper-colored Deep Impact Bit(+)



Item NO.	Size	L(mm)	A(mm)	🚚	📦	RMB
CL503001	PH1	80	8	10/1500	7.07	
CL503002	PH2	80	8	10/1500	7.07	
CL503003	PH3	80	8	10/1500	7.07	

- S2 alloy steel
- Suitable for electric batch, impact driver, impact batch, etc., not easy to break



1/4" Hex Key Impact Bits



Item NO.	Size	Length	Weight	RMB
CL507901	H1.5	5/1200	0.05	
CL507902	H2	5/1200	0.05	
CL507903	H2.5	5/1200	0.05	
CL507904	H3	5/1200	0.06	
CL507905	H4	5/1200	0.06	
CL507906	H5	5/1200	0.06	
CL507907	H6	5/1200	0.07	

- Made of S2 silicon alloy steel with hardness HRC58~60°
- New design, in line with the principle of material mechanics, high torque service life increased by 20%
- Used for fastening bolts, widely used in electron

1/4" Impact Bits(-)



Item NO.	Size	Length	Weight	RMB
CL508102	-2	5	0.06	
CL508103	-3	5	0.05	
CL508104	-4	5	0.05	
CL508105	-5	5	0.06	
CL508106	-6	5	0.06	

- Made of S2 silicon alloy steel with hardness HRC58~60°
- New design, in line with the principle of material mechanics, high torque service life increased by 20%
- Used for fastening bolts, widely used in electron

1/4" Torx Impact Bits



Item NO.	Size	Length	Weight	RMB
CL508006	T6	5/1200	0.05	
CL508007	T7	5/1200	0.05	
CL508008	T8	5/1200	0.05	
CL508009	T9	5/1200	0.05	
CL508010	T10	5/1200	0.05	
CL508015	T15	5/1200	0.06	
CL508020	T20	5/1200	0.06	
CL508025	T25	5/1200	0.06	
CL508027	T27	5/1200	0.06	
CL508030	T30	5/1200	0.06	
CL508040	T40	5/1200	0.07	

- Made of S2 silicon alloy steel with hardness HRC58~60°
- New design, in line with the principle of material mechanics, high torque service life increased by 20%
- Used for fastening bolts, widely used in electron

1/4" Impact Bits(+)



Item NO.	Size	Length	Weight	RMB
CL508201	PH0	5	0.06	
CL508202	PH1	5	0.05	
CL508203	PH2	5	0.05	
CL508204	PH3	5	0.06	

- Made of S2 silicon alloy steel with hardness HRC58~60°
- New design, in line with the principle of material mechanics, high torque service life increased by 20%
- Used for fastening bolts, widely used in electron

1/4" Pozidriv Impact Bits



Item NO.	Size	Length	Weight	RMB
CL508401	PZ1	5	0.06	
CL508402	PZ2	5	0.06	
CL508403	PZ3	5	0.06	

- Made of S2 silicon alloy steel with hardness HRC58~60°
- New design, in line with the principle of material mechanics, high torque service life increased by 20%
- Used for fastening bolts, widely used in electron

1/4" Impact Bits



Item NO.	Size	Length	Weight	RMB
CL508601	Y1	5	0.05	
CL508602	Y2	5	0.06	

- Made of S2 silicon alloy steel with hardness HRC58~60°
- New design, in line with the principle of material mechanics, high torque service life increased by 20%
- Used for fastening bolts, widely used in electron

1/4" Impact Bits (U Type)



Item NO.	Size	🔧	📏	RMB
CL508304	U4	5	0.06	
CL508305	U5	5	0.06	
CL508306	U6	5	0.06	
CL508307	U7	5	0.06	
CL508308	U8	5	0.06	

- Made of S2 silicon alloy steel with hardness HRC58~60°
- New design, in line with the principle of material mechanics, high torque service life increased by 20%
- Used for fastening bolts, widely used in electron

1/4" Impact Bits (TA Type)



Item NO.	Size	🔧	📏	RMB
CL508501	1.8	5	0.05	
CL508502	2.0	5	0.05	
CL508503	2.3	5	0.05	
CL508504	2.7	5	0.05	

- Made of S2 silicon alloy steel with hardness HRC58~60°
- New design, in line with the principle of material mechanics, high torque service life increased by 20%
- Used for fastening bolts, widely used in electron

Impact Bits (+)



Item NO.	Size	🔧	📏	RMB
CL507701	Φ5X60X1.6 PH00	10/1600	0.06	
CL507703	Φ5X60X2.5 PH0	10/1600	0.07	
CL507704	Φ5X60X3 PH1	10/1600	0.07	
CL507705	Φ5X60X4 PH2	10/1600	0.11	
CL507707	Φ5X60X5 PH2	10/1600	0.09	
CL507801	Φ6X60X1.6 PH00	10/1600	0.09	
CL507802	Φ6X60X2 PH0	10/1600	0.09	
CL507803	Φ6X60X2.5 PH0	10/1600	0.09	
CL507804	Φ6X60X3 PH1	10/1600	0.09	
CL507805	Φ6X60X4 PH2	10/1600	0.10	
CL507806	Φ6X60X4.5 PH2	10/1600	0.08	
CL507807	Φ6X60X5 PH2	10/1600	0.11	

- Made of S2 silicon alloy steel with hardness HRC58~60°
- New design, in line with the principle of material mechanics, high torque service life increased by 20%
- Used for fastening bolts, widely used in electron

100mm 6PT Impact screwdriver



Item NO.	Size	🔧	📏	RMB
CL510203	100XH3	10/800		
CL510204	100XH4	10/800		
CL510205	100XH5	10/800		
CL510206	100XH6	10/800		

- Made of S2 alloy steel, with overall heat treatment, high hardness, good toughness, and strong torque.
- Used in conjunction with electric drills and wind drills, with an extended design and strong magnetic field, suitable for working in narrow spaces

100mm Torx Impact screwdriver



Item NO.	Size	🔧	📏	RMB
CL510408	100XTT8	10/800		
CL510410	100XTT10	10/800		
CL510415	100XTT15	10/800		
CL510420	100XTT20	10/800		
CL510425	100XTT25	10/800		
CL510427	100XTT27	10/800		
CL510430	100XTT30	10/800		
CL510440	100XTT40	10/800		

- Made of S2 alloy steel, with overall heat treatment, high hardness, good toughness, and strong torque.
- Used in conjunction with electric drills and wind drills, with an extended design and strong magnetic field, suitable for working in narrow spaces

150mm 6PT Impact screwdriver



Item NO.	Size	🔧	📏	RMB
CL510303	150XH3	5/600		
CL510304	150XH4	5/600		
CL510305	150XH5	5/600		
CL510306	150XH6	5/600		

- Made of S2 alloy steel, with overall heat treatment, high hardness, good toughness, and strong torque.
- Used in conjunction with electric drills and wind drills, with an extended design and strong magnetic field, suitable for working in narrow spaces



150mm Torx Impact screwdriver



Item NO.	Size			RMB
CL510508	150XTT8	5/1000		
CL510510	150XTT10	5/1000		
CL510515	150XTT15	5/1000		
CL510520	150XTT20	5/1000		
CL510525	150XTT25	5/1000		
CL510527	150XTT27	5/1000		
CL510530	150XTT30	5/1000		
CL510540	150XTT40	5/1000		

- Made of S2 alloy steel, with overall heat treatment, high hardness, good toughness, and strong torque.
- Used in conjunction with electric drills and wind drills, with an extended design and strong magnetic field, suitable for working in narrow spaces

Electrician Specific Screwdriver Bit



Item NO.	Size			RMB
CL509901	H1/4X65XSL5.5 PH2	300/1200		
CL509902	H1/4X110XSL5.5 PH2	200/800		
CL509903	H1/4X65XSL5.5 PZ2	300/1200		
CL509904	H1/4X110XSL5.5 PZ2	200/800		

- Made of S2 tool steel, it has high hardness and toughness, is not easy to break corners, and is suitable for various cross shaped and cross shaped screws.
- The head is equipped with strong magnetism, strong adhesion, fits tightly with screws, does not shake or slip, and improves work efficiency.


Locating bit(iron)



Item NO.	Size			RMB
CL505201		25/100	0.16	

- Comply with DIN 8764-1 standard
 - This product can be used for self-tapping screw operation of chuck type hand electric drill, and also can be used
- A variety of electric/rechargeable screwdrivers can be used to tighten the screws, and the positioning setting can prevent the batcher from breaking down the plate when tightening the screws


Diamond Circular Saw Blade(universal)



Item NO.	Size			RMB
CL617901	110X1.9X20mm		10/200	

- Formed by hot pressing technology, the matrix is ultra-thin, with the effect of small cutting seams and no edge collapse. The metal and stone are closely combined with the matrix to ensure the perfect combination of the metal and stone on the blade and improve the service life and cutting speed
- Suitable for cutting cement, marble, granite, pore cement wall brick, pumice concrete, gypsum board, asbestos cement board, limestone (medium hardness), sandstone (medium hardness), stucco floor, etc


Diamond Circular Saw Blade(protection tooth slotting)



Item NO.	Size			RMB
CL617903	115X2.0X20mm		10/200	

- Hot pressing with special process, strong bremsstrahlung is ultra-thin, not easy to deform, long life and small slit
- Low resistance;No porcelain, durable teeth, no edge collapse advantages
- It is suitable for slotting of ceramic tile, concrete, marble, red brick wall and other water and electricity decoration projects


Diamond Circular Saw Blade(corrugated ceramic)



Item NO.	Size			RMB
CL617902	105X1.2X20mm		10/200	

- Hot pressing with special process, strong bremsstrahlung is ultra-thin, not easy to deform, long life and small slit
- Low resistance;No porcelain, durable teeth, no edge collapse advantages
- Suitable for cutting ceramic tiles

Diamond Circular Saw Blade(corrugated dry cut)



Item NO.	Size	🚚	📦	RMB
CL617904	115X2.0X20mm	10/200		

- Hot pressing with special process, strong bremsstrahlung is ultra-thin, not easy to deform, long life and small slit
- Low resistance; No porcelain, durable teeth, no edge collapse advantages
- Suitable for dry cutting construction of tile, concrete, marble and red brick wall

Diamond circular saw blade (road cutting blade)



Item NO.	Size	🚚	📦	RMB
CL613311	500X50X4.2mm	5	4.80	
CL613312	400X50X4.0mm	10	2.94	

- Adopt the latest technology to effectively improve cutting edge and life
- Thickened matrix, not easy to edge collapse when cutting high-grade stone

Carbide circular saw blade



Item NO.	Size	Outside diameter	Inner aperture	Thickness	Number of serrated teeth	🚚	RMB
CL617801	4X30T	108	20.00	1.85	30	10/200	
CL617802	4X40T	109	20.00	1.65	40	10/200	
CL617871	5X30T	175	25.40	2.15	40	50	
CL617811	7X40T	180	25.40	2.20	60	50	
CL617812	7X60T	200	25.40	2.40	40	50	
CL617821	8X40T	201	25.40	2.15	60	50	
CL617822	8X60	230	25.40	2.64	40	50	
CL617831	9X40T	230	25.40	2.62	60	50	
CL617832	9X60T	228	25.40	2.50	80	50	
CL617833	9X80T	255	25.40	2.90	40	50	
CL617841	10X40T	253	25.40	2.76	60	50	
CL617842	10X60T	252	25.40	2.54	80	50	
CL617843	10X80T	301	30	3.24	60	50	
CL617852	12X60T	300	30	3.05	80	50	
CL617853	12X80T	350	30	3.1	80	50	
CL617862	14X80T	124	20	2.05	30	50	

- The matrix is made of 65 manganese steel, welded with YG8 tungsten steel blade, and the whole heat treatment
- High-frequency fired, uniform hardness, sharp sawing and good balance
- Suitable for woodworking, aluminum alloy material, acrylic and other materials cutting

Carbide circular saw blade (aluminum)



Item NO.	Size	Outside diameter	Inner aperture	Thickness	Number of serrated teeth	🚚	RMB
CL617844	10X100T	252	25.40	2.67	100	50	
CL617845	10X120T	250	25.40	2.67	120	50	
CL617854	12X100T	303	30	3.08	100	50	

- The matrix is made of 65 manganese steel, welded with YG8 tungsten steel blade, and the whole heat treatment
- High-frequency fired, uniform hardness, sharp sawing and good balance
 - Suitable for cutting aluminum alloy materials, acrylic and other materials

Cutting Disc



Item NO.	Size	🚚	📦	RMB
CL613332	100X2.5X16	50/400	2.27	

- Comply with JB/T4175 China machinery industry standard manufacturing requirements
- Made of high density fiber network bonded by high temperature curing
- High tensile, impact and bending strength
- Used for professional metal cutting pieces, with strong wear-resistant, durable,
- Ultra-thin cutting body and fast labor saving



Cutting Disc



Item NO.	Size	Grain	Weight	RMB
CL613334 A	125X6X22	25/100	4.35	

- Made of resin fiber material, not easy to break, safe to use, small loss,
- Used for cutting and polishing metal, rubber wood and plastic.
- With high tensile, impact and bending strength, suitable for processing high hardness and brittle materials


Louvre Blade



Item NO.	Size	Grain	Weight	RMB
CL615505	100X16mm 60目	400		

- This product uses 21X17mm Jinniu 565 gauze, which has been fired at high temperature to improve its sharpness and durability. It is used for polishing welds, removing burrs, removing rust, cleaning castings, polishing wood, and fine surface treatment.
- Adopting a thickened design, it is hard and durable, effectively extending the working life.
- The steel ring mesh cover design ensures stable polishing and greater wear resistance.

Cutting Disc



Item NO.	Size	Grain	Weight	RMB
CL613333	100X6X16	25/200	2.60	

- Made of resin fiber material, not easy to break, safe to use, small loss, with high tensile, impact and bending strength,
- Suitable for processing high hardness and brittle materials

Cutting Disc (Professional level)



Item NO.	Size	Grain	Weight	RMB
CL611314	350X2.7X25.4	30	0.64	
CL611305	400X3.2X32	25	0.94	

- It is made of brown corundum first grade abrasive and reinforced glass fiber net and other high-temperature curing materials. The product has high stability, good wear resistance, impact resistance and long service life. Professional for cutting all kinds of metal and non-metal materials

Cutting Disc



Item NO.	Size	Grain	Weight	RMB
CL613336	107X1.2X16	50/1000	1.00	

- Developed by using resin as adhesive, brown corundum (A), silicon carbide (C) as abrasive and glass fiber as reinforcement material
- High tensile, impact and bending strength

Tap Wrench



Item NO.	Size			RMB
CL712112	M3-M12	1/200	0.16	
CL712120	M6-M20	1/50	0.44	
CL712125	M6-M25	1/25	0.93	

- Gripper hardened and phosphating with replaceable galvanized steel handle
- Manual tap or reamer for mounting the square head drive, the handle can be removed in a small

Die Wrench



Item NO.	Size			RMB
CL712006	M4.5-M6	1/100	0.07	
CL712009	M7-M9	1/100	0.11	
CL712011	M10-M11	1/80	0.21	
CL712014	M12-M14	1/50	0.00	
CL712020	M16-M20	1/40	0.52	
CL712026	M22-M26	1/25	0.87	

- Made of high quality alloy steel with integral heat treatment. Suitable for assembling round die
- Hand tools for machining products with external threads


Hand Alloy Steel Tap



Item NO.	Size			RMB
CL711903	M3X0.5	10/800	0.01	
CL711904	M4X0.7	10/800	0.01	
CL711905	M5X0.8	10/800		
CL711906	M6X1	10/800		
CL711908	M8X1.25	10/500		
CL711910	M10X1.5	10/400	0.04	
CL711912	M12X1.75	10/300	0.06	
CL711914	M14X2	5/300	0.20	
CL711916	M16X2	5/300		
CL711918	M18X2.5	2/40		
CL711920	M20X2.5	2/40	0.23	
CL711922	M22X2.5	2/40		
CL711924	M24X3	2/40		

- Made of 9CrSi material, with clear tapping thread and good cutting
- Used for processing high strength steel with DIN 13 thread and strength up to 1200N/mm²

Alloy Steel Round Die



Item NO.	Size			RMB
CL711803	M3X0.5	10/1500	0.01	
CL711804	M4X0.7	10/1500		
CL711805	M5X0.8	10/1500	0.01	
CL711806	M6X1	10/1500		
CL711808	M8X1.25	10/800		
CL711810	M10X1.5	10/400	0.04	
CL711812	M12X1.75	10/240		
CL711814	M14X2	10/240		
CL711816	M16X2	10/240	0.07	
CL711818	M18X2.5	10/160		
CL711820	M20X2.5	10/160	0.12	
CL711822	M22X2.5	10/160	0.12	
CL711824	M24X3	1/100		

- High quality HSS alloy steel is used to make tapping thread clear and good cutting degree
- Used for machining ISO DIN 13 bolts with conventional metric threads

12pcs Metelc Tap And Die Set



Item NO.	Size			RMB
CL706712	12PCS	24	0.57	

configuration

- 5 a metric tap M6X1. 0, M7X1. 0, M8X1. 25, M10X1. 5, M12X1. 75
- 5 metric round die M6X1. 0, M7X1. 0, M8X1. 25, M10X1. 5, M12X1. 75
- 1 piece tap hinge 1/2 "(M3-M12)
- 1 piece die hinge holder 1 "(M25)

20pcs Metelc Tap And Die Set



Item NO.	Size			RMB
CL706820	20PCS	24	0.68	

- 9 metric taps M3X0. 5, M4X0. 7, M5X0. 8, M6X1. 0, M7X1. 0 M8X1. 25, M9X1. 25, M10X1. 5, M12X1. 75
- 9 metric round die pieces M3X0. 5, M4X0. 7, M5X0. 8, M6X1. 0, M7X1. 0 M8X1. 25, M9X1. 25, M10X1. 5, M12X1. 75
- 1 piece tap hinge 1/2 "(M3-M12)
- 1 piece die hinge holder 1 "(M25)



40pcs Metelc Tap And Die Set



Item NO.	Size	10	1.21	RMB
CL706940	40PCS			

16 metric taps

M3X0.5, M4X0.7, M5X0.8, M6X0.75, M7X0.75, M8X1.0, M10X1.25, M12X1.5, M3X0.6, M4X0.75, M5X0.9, M6X1.0, M7X1.0, M8X1.25, M10X1.5, M12X1.75

•16 metric round die

M3X0.5, M4X0.7, M5X0.8, M6X0.75, M7X0.75, M8X1.0, M10X1.25, M12X1.5, M3X0.6, M4X0.75, M5X0.9, M6X1.0, M7X1.0, M8X1.25, M10X1.5, M12X1.75

•1 NPT tap :1/8-27

•1 NPT round die: 1/8-27

•1 piece tap hinge 1/2 "(M3-M12)

•1 piece die hinge holder 1 "(M25)

•2pcs T tap reamer 1/4"

•1 piece die reamer 1 "(M25)

1 a tooth gauge

•1 screw batch

Machine Tap



Item NO.	Size	10/600	RMB
CL713603	M3*0.5	10/600	
CL713604	M4*0.7	10/600	
CL713605	M5*0.8	10/600	
CL713606	M6*1.0	10/600	
CL713608	M8*1.25	10/600	
CL713610	M10*1.5	10/600	
CL713612	M12*1.75	5/500	
CL713614	M14*2.0	5/200	
CL713616	M16*2.0	5/200	
CL713618	M18*2.5	5/200	
CL713620	M20*2.5	1/100	
CL713622	M22*2.5	1/100	
CL713624	M24*3.0	1/100	
CL713627	M27*3.0	1/100	
CL713630	M30*3.5	1/100	

- Made of 6542 high-speed steel (HSS) material, overall heat treated, with a hardness of HRC62 ± 2
- Fast tapping speed, more precise thread grinding, and long service life.

M35 Twist Drill



Item NO.	Size	Working length	Total length	10/100	RMB
CL618601	1.0mm	12mm	34mm	10/100	
CL618602	1.5mm	18mm	40mm	10/100	
CL618603	2.0mm	24mm	49mm	10/100	
CL618604	2.5mm	30mm	57mm	10/100	
CL618605	2.8mm	33mm	61mm	10/100	
CL618606	3.0mm	33mm	61mm	10/100	
CL618607	3.2mm	36mm	65mm	10/100	
CL618608	3.5mm	39mm	70mm	10/100	
CL618609	3.8mm	43mm	75mm	10/100	
CL618610	4.0mm	43mm	75mm	10/100	
CL618611	4.2mm	43mm	75mm	10/100	
CL618612	4.5mm	47mm	80mm	10/100	
CL618613	4.8mm	52mm	86mm	10/100	
CL618614	5.0mm	52mm	86mm	10/100	
CL618615	5.2mm	52mm	86mm	10/100	
CL618616	5.5mm	57mm	93mm	10/100	
CL618617	5.8mm	57mm	93mm	10/100	
CL618618	6.0mm	57mm	93mm	10/100	
CL618619	6.2mm	63mm	101mm	10/100	
CL618620	6.5mm	63mm	101mm	10/100	
CL618621	6.8mm	69mm	109mm	5/50	
CL618622	7.0mm	69mm	109mm	5/50	
CL618623	7.5mm	69mm	109mm	5/50	
CL618624	8.0mm	75mm	117mm	5/50	
CL618625	8.5mm	75mm	117mm	5/50	
CL618626	9.0mm	81mm	125mm	5/50	
CL618627	9.5mm	81mm	125mm	5/50	
CL618628	10.0mm	87mm	133mm	5/50	
CL618629	10.5mm	87mm	133mm	5/50	
CL618630	11.0mm	94mm	142mm	5/50	
CL618631	11.5mm	94mm	142mm	5/50	
CL618632	12.0mm	101mm	151mm	5/50	
CL618633	12.5mm	101mm	151mm	5/50	
CL618634	13.0mm	101mm	151mm	5/10	

- The product is made of M35 high-speed steel, with a cobalt content of 5%. It is manufactured using a grinding process and has precise dimensions.
- The top angle is 135°, and the drilling is not easy to slip.
- Adopting precision thread technology, effectively increasing cutting speed and service life.

Twist Drill (6542)



Item NO.	Size			RMB
CL615020	2.0mm	10/100	0.02	
CL615025	2.5mm	10/100	0.03	
CL615030	3.0mm	10/100	0.04	
CL615032	3.2mm	10/100	0.04	
CL615035	3.5mm	10/100	0.06	
CL615038	3.8mm	10/100	0.07	
CL615040	4.0mm	10/100	0.08	
CL615042	4.2mm	10/100	0.08	
CL615045	4.5mm	10/100	0.09	
CL615048	4.8mm	10/100	0.11	
CL615050	5.0mm	10/100	0.12	
CL615051	5.1mm	10/100	0.13	
CL615052	5.2mm	10/100	0.13	
CL615055	5.5mm	10/100	0.15	
CL615058	5.8mm	10/100	0.17	
CL615060	6.0mm	10/100	0.18	
CL615061	6.1mm	10/100	0.20	
CL615062	6.2mm	10/100	0.20	
CL615065	6.5mm	10/100	0.22	
CL615068	6.8mm	10/100	0.26	
CL615070	7.0mm	10/100	0.28	
CL615072	7.2mm	10/100	0.30	
CL615075	7.5mm	10/100	0.31	
CL615078	7.8mm	10/100	0.34	
CL615080	8.0mm	10/100	0.38	
CL615082	8.2mm	10/100	0.39	
CL615085	8.5mm	10/100	0.42	
CL615090	9.0mm	5/50	0.27	
CL615092	9.2mm	5/50	0.27	
CL615095	9.5mm	5/50	0.29	
CL615100	10.0mm	5/50	0.33	
CL615102	10.2mm	5/50	0.34	
CL615105	10.5mm	5/50	0.36	
CL615108	10.8mm	5/50	0.42	
CL615110	11.0mm	5/50	0.42	
CL615115	11.5mm	5/50	0.44	
CL615120	12.0mm	5/50	0.50	
CL615125	12.5mm	5/50	0.54	

- Made of 6542 high-speed steel with precision manufacturing and full grinding process, the cutting edge is made of
- Double rear corner processing for convenient positioning and punching function
- Can be used for copper, cast iron alloys, carbon steel, tool steel before quenching, mold steel, etc

Twist Drill(4341)



Item NO.	Size			RMB
CL619401	1.0mm	100/4500		
CL619402	1.5mm	100/4500		
CL619403	2.0mm	100/4500		
CL619404	2.5mm	100/4500		
CL619405	2.8mm	100/4500		
CL619406	3.0mm	100/4500		
CL619407	3.2mm	100/4500		
CL619408	3.5mm	100/4500		
CL619409	4.0mm	100/3000		
CL619410	4.2mm	100/3000		
CL619411	4.5mm	100/3000		
CL619412	5.0mm	100/2000		
CL619413	5.2mm	100/2000		
CL619414	5.5mm	100/2000		
CL619415	6.0mm	100/2000		
CL619416	6.5mm	100/1000		
CL619417	7.0mm	50/900		
CL619418	7.5mm	50/900		
CL619419	8.0mm	50/900		
CL619420	8.5mm	50/900		
CL619421	9.0mm	20/500		
CL619422	9.5mm	20/500		
CL619423	10.0mm	20/500		
CL619424	10.5mm	20/500		
CL619425	11.0mm	20/300		
CL619426	11.5mm	20/300		
CL619427	12.0mm	20/300		
CL619428	12.5mm	20/300		
CL619429	13.0mm	20/300		
CL619430	13.5mm	20/300		
CL619431	14.0mm	20/300		

- Made of high-quality high-speed steel, with grinding technology and fast drilling speed.
- Adopting precision thread technology, effectively increasing cutting speed and service life.

High speed steel double head twist drill



Item NO.	Size			RMB
CL617130	3.0mm	10	0.04	
CL617132	3.2mm	10	0.04	
CL617135	3.5mm	10	0.06	
CL617140	4.0mm	10	0.07	
CL617142	4.2mm	10	0.08	
CL617145	4.5mm	10	0.09	
CL617150	5.0mm	10	0.12	
CL617152	5.2mm	10	0.13	

- Made of 6542 high-speed steel with precision manufacturing and full grinding process, the cutting edge is made of
- Double rear corner processing for convenient positioning and punching function
- Can be used for copper, cast iron alloys, carbon steel, tool steel before quenching, mold steel, etc



VDE
绝缘



13pcs Twist Drill Set



Details:
1.5, 2, 2.5, 3, 3.2, 3.5, 4, 4.5
4.8, 5, 5.5, 6, 6.5mm

Item NO.	Size			RMB
CL615313	13PCS		0.24	

- Meet DIN 1897 manufacturing requirements
- It is made of 6542 high speed steel, with full grinding process and cutting edge
- Double back Angle processing, convenient positioning and punching function
- It can be used for copper, cast iron alloy, carbon steel, tool steel before quenching, die steel, etc

19pcs Twist Drill Set



Details:
1, 1.5, 2, 2.5, 3, 3.5, 4,
4.5, 5, 5.5, 6, 6.5, 7, 7.5,
8, 8.5, 9, 9.5, 10mm

Item NO.	Size			RMB
CL615319	19PCS		0.65	

- Meet DIN 1897 manufacturing requirements
- It is made of 6542 high speed steel, with full grinding process and cutting edge
- Double back Angle processing, convenient positioning and punching function
- It can be used for copper, cast iron alloy, carbon steel, tool steel before quenching, die steel, etc

25PCS Twist Drill Set



Details:
1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5,
5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9,
9.5, 10, 10.5, 11.5, 12, 12.5,
13mm

Item NO.	Size			RMB
CL615325	25PCS		0.65	

- Meet DIN 1897 manufacturing requirements
- It is made of 6542 high speed steel, with full grinding process and cutting edge
- Double back Angle processing, convenient positioning and punching function
- It can be used for copper, cast iron alloy, carbon steel, tool steel before quenching, die steel, etc

Multi-function Ceramic Drill



Item NO.	Size			RMB
CL619506	6mm	100/1000		2.89
CL619508	8mm	100/1000		
CL619510	10mm	50/700		
CL619512	12mm	50/700		

- Using a hard alloy blade, the blade is sharp, the drilling speed is fast, and the hole wall is smooth and round.
- The anti slip triangular handle design makes the electric drill grip more secure and does not slip.
- Double spiral chip removal design, increasing chip discharge during high-speed operation. Prevent blockage of cavities.

Pagoda drill



Item NO.	Size			RMB
CL620012	4-12mm	1/200		
CL620020	4-20mm	1/200		
CL620032	4-32mm	1/100		

- Made of 4241 high-speed steel, high-temperature quenching, high-precision grinding, and sharp drilling edges.
- The spiral groove design can quickly remove debris and effectively prevent metal debris from splashing and causing damage.
- Universal sturdy triangular handle, not easy to slip, sturdy and durable
- Used for removing burrs, chamfers, opening holes, expanding holes, and other work

Pagoda Drill Set



Item NO.	Size			RMB
CL617212	4-12mm	1/200		
CL617220	4-20mm	1/200		
CL617232	4-32mm	1/100		

- Made of M35 high-speed steel, high-temperature quenching, high-precision grinding, and sharp drilling edges.
- The spiral groove design can quickly remove debris and effectively prevent metal debris from splashing and causing damage.
- Universal sturdy triangular handle, not easy to slip, sturdy and durable
- Used for removing burrs, chamfers, opening holes, expanding holes, and other work

Ceramic Stone Eccentric Drill



Item NO.	Size	Length	Diameter of handle	Weight	Weight	RMB
CL619806	6mm	90mm	6.35mm	100/1000	17.5g	
CL619808	8mm	90mm	6.35mm	100/1000	24g	
CL619810	10mm	90mm	6.35mm	50/500	33.5g	
CL619812	12mm	90mm	6.35mm	50/500	37.5g	

- Special tilted head design, accurate positioning, and fast hole insertion;
- Interlocking blade design, sharp and wear-resistant, fast drilling;
- Anti slip hexagonal handle, overall quenching, sturdy and durable with long service life, compatible with different models such as hand drills, lithium drills, and bench drills;
- Multiple specifications, free selection to meet different job requirements;
- Suitable for different materials such as ceramics, tiles, wood, concrete, PVC pipes, etc;
- Can be dried and added with water for greater durability;


Electric Hammer Drill(Two pits round handle)



Item NO.	Size	Weight	Weight	RMB
CL616201	6X110mm	10/500	0.04	
CL616202	8X110mm	10/500	0.04	
CL616203	6X150mm	10/500	0.05	
CL616204	8X150mm	10/500	0.05	
CL616205	10X150mm	10/500	0.07	
CL616206	12X150mm	10/500	0.08	
CL616207	14X150mm	10/500	0.09	
CL616208	16X150mm	10/500	0.11	
CL616210	8X200mm	10/500	0.06	
CL616211	10X200mm	10/500	0.08	
CL616212	12X200mm	10/500	0.10	
CL616213	14X200mm	10/400	0.13	
CL616214	16X200mm	10/400	0.15	
CL616215	18X200mm	4/240	0.21	
CL616216	20X200mm	3/210	0.21	
CL616217	22X200mm	4/200	0.26	
CL616218	25X200mm	4/200	0.31	
CL616228	10X350mm	10/300	0.14	
CL616229	12X350mm	10/250	0.17	
CL616230	14X350mm	10/200	0.23	
CL616231	16X350mm	10/200	0.25	
CL616232	18X350mm	4/160	0.38	
CL616233	20X350mm	3/150	0.39	
CL616234	22X350mm	3/90	0.48	
CL616235	25X350mm	3/90	0.60	
CL616236	28X350mm	2/80	0.74	

- Sharp blade drill tip and twist design, effective chip removal during drilling, low noise during operation, low risk of fracture, and long service life
- The drill body is made of 40Cr material and the surface is sandblasted
- Used for drilling holes on brittle and hard materials such as concrete, bricks, and marble without metal debris

Electric Hammer Drill(Four pits square handle)

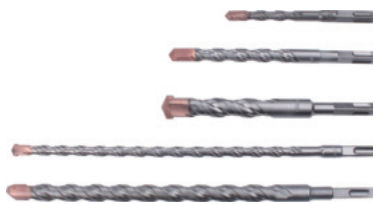

Item NO.	Size	Weight	Weight	RMB
CL616101	6*110mm	500		
CL616102	8*110mm	500		
CL616103	6*150mm	500		
CL616104	8*150mm	500		
CL616105	10*150mm	500		
CL616106	12*150mm	500		
CL616107	14*150mm	500		
CL616108	16*150mm	500		
CL616110	8*200mm	500		
CL616111	10*200mm	500		
CL616112	12*200mm	500		
CL616113	14*200mm	400		
CL616114	16*200mm	400		
CL616115	18*200mm	500		
CL616116	20*200mm	500		
CL616117	22*200mm	500		
CL616118	25*200mm	500		
CL616119	8*250mm	300		
CL616120	10*250mm	300		
CL616121	12*250mm	300		
CL616122	14*250mm	250		
CL616123	16*250mm	250		
CL616124	18*250mm	200		
CL616125	20*250mm	200		
CL616126	22*250mm	150		
CL616127	25*250mm	150		
CL616128	10*350mm	300		
CL616129	12*350mm	250		
CL616130	14*350mm	250		
CL616131	16*350mm	250		
CL616132	18*350mm	250		
CL616133	20*350mm	150		
CL616134	22*350mm	150		
CL616135	25*350mm	150		
CL616136	28*350mm	80		
CL616137	30*350mm	50		
CL616138	32*350mm	40		
CL616139	35*350mm	40		
CL616140	10*500mm	100		
CL616141	12*500mm	100		
CL616142	14*500mm	80		
CL616143	16*500mm	80		
CL616144	18*500mm	80		
CL616145	20*500mm	60		
CL616146	22*500mm	50		
CL616147	25*500mm	50		
CL616148	28*500mm	40		
CL616149	30*500mm	35		
CL616150	32*500mm	30		
CL616151	35*500mm	25		

- Sharp blade drill tip and twist design, effective chip removal during drilling, low noise during operation, low risk of fracture, and long service life
- The drill body is made of 40Cr material and the surface is sandblasted
- Used for drilling holes on brittle and hard materials such as concrete, bricks, and marble without metal debris



VDE
绝缘

Electric Hammer Tip Chisel / Flat Chisel



	Item NO.	Size		RMB
Square handle pointed chisel	CL617504	14X250	200	
	CL617505	14X400	100	
	CL617602	17X280	100	
Hexagonal pointed chisel	CL617603	17X400	70	
	CL617701	30X400	30	
Pointed chisel	CL617514	14X250	200	
	CL617515	14X400	100	
Square handle flat chisel	CL617612	17X280	100	
	CL617613	17X400	70	
Hexagonal flat chisel	CL617711	30X400	30	

- The product is made of 40Cr material and undergoes overall heat treatment, making it sturdy and durable;
- Professional grade product, used for drilling, slotting and other operations on walls and floors

Alloy Opener



Item NO.	Size			RMB
CL811101	19.5mm	10/400		
CL811102	22.5mm	10/400		
CL811103	20.5mm	10/200		
CL811104	25.5mm	10/200		
CL811105	16.5mm	20/200		
CL811106	18.5mm	20/200		
CL811114	14mm	20/200		
CL811116	16mm	10/400		
CL811118	18mm	10/400		
CL811119	19mm	10/400		
CL811120	20mm	10/400		
CL811122	22mm	10/400		
CL811125	25mm	10/300		
CL811126	26mm	10/300		
CL811128	28mm	10/300		
CL811130	30mm	10/300		
CL811132	32mm	10/200		
CL811135	35mm	10/200		
CL811140	40mm	10/200		
CL811145	45mm	10/100		
CL811150	50mm	10/100		
CL811152	52mm	1/60		
CL811153	53mm	1/60		
CL811155	55mm	1/60		
CL811160	60mm	1/60		
CL811165	65mm	10/60		
CL811175	75mm	1/60		
CL811185	85mm	1/32		

- Made by forging high carbon steel into one piece
- The tooth is made of YG10 tungsten carbide alloy steel, with a hardness of HRC64-65 °. The tooth tip is sharp, resistant to cutting, low loss, and has a long service life
- 4341 high-speed steel positioning drill bit, spring can open 0.5-5mm stainless steel thin iron plate, aluminum material, etc

Bimetal Hole Saw



Item NO.	Size			RMB
CL811601	16mm	25/450		
CL811602	18mm	25/450		
CL811604	20mm	25/450		
CL811606	22mm	25/450		
CL811609	25mm	25/450		
CL811611	28mm	25/450		
CL811612	30mm	20/360		
CL811613	32mm	20/360		
CL811614	35mm	15/270		
CL811616	40mm	10/180		
CL811618	45mm	10/180		
CL811620	50mm	6/108		
CL811621	53mm	6/108		
CL811622	55mm	6/108		
CL811623	60mm	1/120		
CL811624	65mm	1/120		
CL811625	70mm	1/120		
CL811626	75mm	1/120		
CL811627	80mm	1/120		
CL811628	85mm	1/90		
CL811629	90mm	1/90		
CL811630	95mm	1/90		
CL811631	100mm	1/90		
CL811633	110mm	1/60		
CL811635	120mm	1/60		
CL811637	130mm	1/60		
CL811639	140mm	1/40		
CL811641	150mm	1/40		
CL811643	160mm	1/30		
CL811645	170mm	1/30		
CL811647	180mm	1/30		
CL811650	200mm	1/20		

- The center drill is made of 6mm diameter 4341 material high-speed steel, which can accurately locate, has high strength, and good toughness.
- The tooth tip is made of imported M42 high-speed steel, with front and rear inclined teeth, which can quickly balance when drilling.
- Widely applicable to various materials such as copper sheet, aluminum sheet, thin iron sheet, PVC, acrylic, aluminum-plastic board, gypsum board, etc Material drilling operation.

Diamond Glass Hole Saw



Item NO.	Size	🔧	📏	RMB
CL810906	6mm	10/3000	0.07	
CL810908	8mm	10/2500	0.07	
CL810910	10mm	10/2000	0.09	
CL810912	12mm	5/1280	0.06	
CL810914	14mm	5/1280	0.08	
CL810916	16mm	5/960	0.07	
CL810918	18mm	5/960	0.13	
CL810920	20mm	5/800	0.14	
CL810922	22mm	5/800	0.15	
CL810925	25mm	5/640	0.19	
CL810928	28mm	5/400	0.22	
CL810930	30mm	2/320	0.10	
CL810932	32mm	2/320	0.11	
CL810935	35mm	2/288	0.13	
CL810938	38mm	2/192	0.14	
CL810940	40mm	2/192	0.14	
CL810942	42mm	2/192	0.14	
CL810945	45mm	2/192	0.16	
CL810950	50mm	2/128	0.19	
CL810960	60mm	1/30	0.20	
CL810965	65mm	1/30		
CL810970	70mm	1/30		
CL810975	75mm	1/30		

- The opening is neat, smooth, and free of broken edges, without any vibration phenomenon, with low incision resistance, which improves the opening speed
- After slotting, it is easy to decorate and remove debris, making it the preferred product for efficient operation, installation, and hole opening

Flexible hand saw blade



Item NO.	Size	🔧	📏	RMB
CL609007	300X10.7(24牙)	50/1000	1.47	
CL609008	300X10.7(18牙)	50/1000	1.23	

- Made of high carbon steel, with heat-treated teeth, strong toughness, sharp serrations, and smooth cutting.
- Used for cutting low-carbon steel, cast iron, copper, aluminum, wood, etc

Bimetal Blades



Item NO.	Size	🔧	📏	RMB
CL609005	300X12(24)	100/1000	2.06	
CL609006	300X12(18)	100/1000	2.00	

- The saw blade is made of high-quality spring steel
- The teeth are made of high-speed steel and welded by electron beam welding

Cable Ties



Item NO.	Size	Width	Pull (N)	Weight (g)	Quantity	RMB
CL811501	3X150	2.5	80	200	600	
CL811511	4X150	3.6	180	200	400	
CL811512	4X200	3.6	180	200	260	
CL811513	4X250	3.6	180	200	220	
CL811514	4X300	3.6	180	200	180	
CL811521	5X200	4.6	220	200	220	
CL811522	5X250	4.6	220	200	170	
CL811523	5X300	4.6	220	200	135	
CL811524	5X350	4.6	220	200	110	
CL811531	8X250	7.6	533	300	120	
CL811532	8X300	7.6	533	300	105	
CL811533	8X350	7.6	533	300	90	
CL811534	8X400	7.6	533	300	80	
CL811535	8X500	7.6	533	300	60	

- Made of brand new nylon material by injection molding, each tie is new and transparent.
- Thickened locking buckle design, strong biting force, tightly locking without detachment.
- The zip tie has clear tooth patterns, strong toughness, and is not loose or slippery when stuck.

Black Cable Ties



Item NO.	Size	Width	Pull (N)	Weight (g)	Quantity	RMB
CL811801	3X100	2.5	80	200	900	
CL811802	3X150	2.5	80	200	600	
CL811803	3X200	2.5	80	200	400	
CL811811	4X150	3.6	180	200	400	
CL811812	4X200	3.6	180	200	260	
CL811813	4X250	3.6	180	200	220	
CL811814	4X300	3.6	180	200	180	
CL811815	4X350	3.6	180	200	130	
CL811816	4X400	3.6	180	200	110	
CL811821	5X200	4.6	220	200	220	
CL811822	5X250	4.6	220	200	170	
CL811823	5X300	4.6	220	200	135	
CL811824	5X350	4.6	220	200	110	
CL811825	5X400	4.6	220	200	90	
CL811827	5X500	4.6	220	200	65	
CL811831	8X200	7.6	533	300	145	
CL811832	8X250	7.6	533	300	120	
CL811833	8X300	7.6	533	300	105	
CL811834	8X350	7.6	533	300	90	
CL811835	8X400	7.6	533	300	80	
CL811836	8X500	7.6	533	300	60	

- It is made of new nylon material by injection molding, with good aging resistance, strong bearing capacity and long service life.
- Thickened locking buckle design, connected teeth, tightly engaged, tightly locked without detachment.
- The zip tie has clear tooth patterns, strong toughness, and is not loose or slippery when stuck.



ChangLu Tools quality assurance and after-sales service

1. Quality system:

The company has passed ISO9001:2015 international quality management system certification.

2. Quality Standard:

Product quality standards in accordance with ISO DIN AMSE GB/T or above this standard products using materials as follows Chromium molybdenum steel, chromium vanadium steel, carbon steel, alloy steel, manganese steel, HSS and other materials seiko manufacturing, according to the product outside Design electroplating, electrophoresis, manganese phosphate, spray, mirror polishing, fog surface rust prevention and other surface treatment.

3. How to replace or repair range:

Within the normal service life range, if the product can not be used due to quality problems, users can buy the voucher to changlu tool dealership for free repair or replacement. Products not caused by the quality of the product itself Damaged, changlu tool dealership will provide paid replacement parts maintenance services.

4. Non-replaceable and warranty:

(1) The damage caused by abnormal use of the product, such as exceeding the service life and scope, artificial damage, modification and use, replacement of parts by oneself and loss of parts, accidents or abuse without following the instructions, is not covered by warranty replacement.

(2) Rust, peeling of electroplating, scratches on the surface, damaged plastic handles and other conditions that do not affect the performance of the product after use are not within the scope of quality assurance, and replacement or repair will not be accepted.

5. Service Consultation:

If users need to know more about the after-sales service cutting or warranty terms of ChangLu Tool, or if they are not satisfied with the service cutting at the point of sale, they can contact the national Service cutting hotline: 400-728-9088 or send an email to our company at info@chenglutools.com

6. Right of Interpretation:

ChangLu has the right to modify this clause under certain circumstances. Changlu reserves the right of final interpretation

Changlu® | QUALITY • VALUE • SERVICE

SHANDONG CHANGLU TOOLS CO.,LTD

Address: No. 19, Fengan Road, Fenghuangling Street,
Hedong District, Linyi City, Shandong Province

Tel:86 0539 2653587/86 15963966997

Changlu Official website: www.changlutools.com

E-mail info@changlutools.com



Wechat official account: Changlu tool
Changlutools Wechat ID: Changlutools

Every effort has been made in the preparation of this catalog to ensure its accuracy and completeness, but there is no guarantee that this catalog is free from any errors or omissions. Changlu Tool reserves the right to modify the technical parameters and shape of the tool.